



# Oregon

Kate Brown, Governor

**Water Resources Department**

725 Summer St NE, Ste A

Salem, OR 97301

Phone: 503-986-0900

Fax: 503-986-0904

September 23, 2021

SAM KINGREY WWC/MWC#1899  
DOWN RIGHT DRILLING & PUMP INC  
6025 LITTLE FREEZEOUT RD  
CALDWELL, ID 83607

## FINAL ORDER

Dear Mr. Kingrey:

The Special Standards Request Form you submitted for owner: Otis Creek Ranch, Start Card number: 1053711, is hereby approved for the following: You may construct this well as described on your Special Standards Request Form dated September 21, 2021. All other well construction standards must be met. A copy of your Special Standards Request Form is enclosed.

Verbal approval of this Special Standards Request was provided on September 23, 2021.

The Well Construction Standards serve to protect ground water resources. By approving and issuing this special construction standard the Oregon Water Resources Department is not representing that a well constructed in accordance with this condition will maintain structural integrity or that it meets engineering standards. The well constructor/or landowner is responsible for ensuring that a well is constructed in a manner that protects ground water resources as required under Oregon Administrative Rules 690-200 through 690-240.

If you have any questions regarding this letter, I may be contacted at (503) 302-8618, or by e-mail at [Travis.N.Kelly@oregon.gov](mailto:Travis.N.Kelly@oregon.gov).

Sincerely,

Travis Kelly, Coordinator  
Well Construction Program  
Well Construction and Compliance Section

Enclosure

cc: Jon Sanfilippo, Well Inspector, East Region

**This is a final order in other than contested case. This order is subject to judicial review under ORS 183.484. Any petition for judicial review must be filed within the 60 day time period specified by ORS 183.484(2). Pursuant to ORS 536.075 and OAR 137-004-0080 you may either petition for judicial review or petition the Director for reconsideration of this order. A petition for reconsideration may be granted or denied by the director, and if no action is taken within 60 days following the date the petition was filed, the petition shall be deemed denied.**



Oregon Water Resources Department  
 725 Summer Street NE, Suite A  
 Salem Oregon 97301-1266  
 (503) 986-0900  
 www.wrd.state.or.us

# Special Standards Request Form

## REQUEST FOR WRITTEN APPROVAL TO USE CONSTRUCTION METHODS NOT INCLUDED IN OREGON ADMINISTRATIVE RULES 690-200 THROUGH 690-240

Before the request can be considered, this form must be completed. Requests shall be submitted to the Well Construction Program Coordinator, Water Resources Department, 725 Summer Street NE, Suite A, Salem OR 97301-1266. Requests may also be considered by the appropriate Regional Manager.

Date of request: 9/21/21 Oral approval date (if applicable): \_\_\_\_\_

Bonded Well Constructor (name, license #, and mailing address): Sam Kingrey #1899  
6025 Little Freezeout Road Caldwell, ID 83607

(1) Location of Well: NW 1/4 NE 1/4 Tax lot 600 Section 8,  
 Township 20 S , Range 36 E , Harney County  
 Address at well site: Altnow Belulah Rd 1.5 mi E of Otis Valley Rd

(2) Start Card Number(s)(for work to be done): 1053711


(3) Name and Address of Land Owner: Otis Creek Ranch  
PO Box 224 Drewsey, ID 97904

(4) Distance to the nearest septic tank, drainfield, closed sewage line (if water supply well)  
None-On Ranch-Irrigation

(5) The unusual site conditions which necessitate this request: 12" Casing has dropped in  
well and can not be retrieved back to the surface. Right now 16" .250 casing is sealed in +1.5 to 46'.  
12" casing is -38.5 to 520.5 .375 casing is 520.5 to 544.5

(6) The proposed construction methods that the bonded well constructor believes will be adequate for this well: (attach additional pages if needed)  
We believe the 20.5' of 12" .250 casing below 500' is not a big concern.  
We are proposing cementing 12" casing in place as it is now. Overlap between the 12" and 16" would only be 7.5';  
however, it would be cemented from that point to approx 501' and 16' casing is already sealed to 40'.

- (7) Diagram showing the pertinent features of the proposed well design and construction: (attach additional pages if needed)

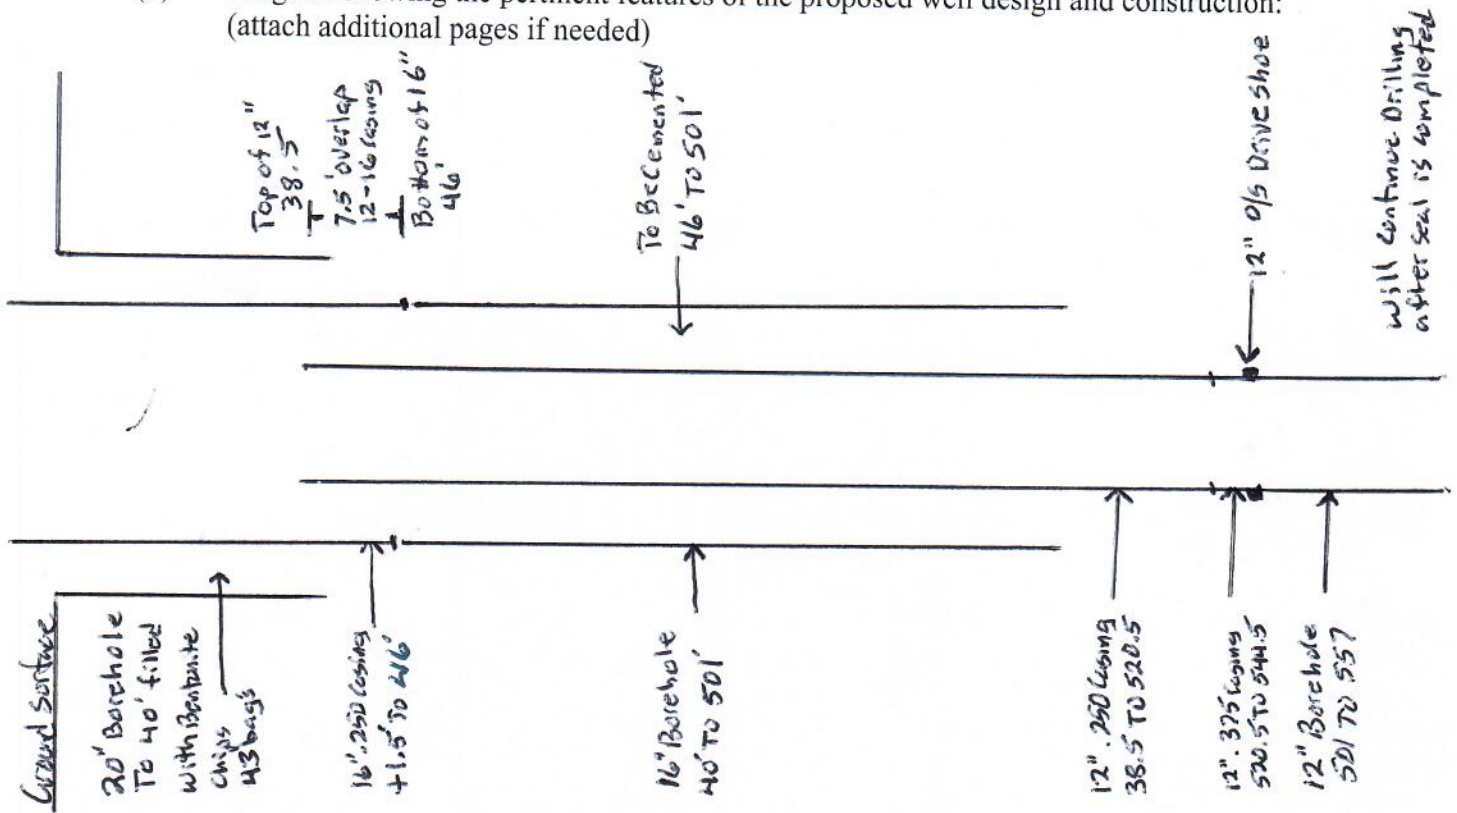

PLEASE NOTE:

- (1) The Well Construction Standards serve to protect ground water resources. By approving and issuing this special construction standard the Oregon Water Resources Department is not representing that a well constructed in accordance with this condition will maintain structural integrity or that it meets engineering standards. The well constructor/or landowner is responsible for ensuring that a well is constructed in a manner that protects ground water resources as required under Oregon Administrative Rules 690-200 through 690-240.
- (2) If it should be determined at some future date that the well, due to its construction, is allowing ground water contamination, waste or loss of artesian pressure, the undersigned shall return to the site and rectify the problem.
- (3) If oral approval was granted, a written request must be submitted to the Department either within three (3) working days of the date of oral approval or prior to the completion of the associated well work. Failure to submit a written request as described above may void prior oral approval.

I have read and understand the above information. I further attest that the information provided is accurate to the best of my knowledge.

Bonded Constructor Signature: \_\_\_\_\_

*Samuel Kumpung*