



Oregon

Theodore R. Kulongoski, Governor

ev
Water Resources Department

North Mall Office Building
725 Summer Street NE, Suite A
Salem, OR 97301-1271
503-986-0900
FAX 503-986-0904

May 18, 2005

WESTERBERG DRILLING
STEVEN N STADELI
36728 S KROPF RD
MOLALLA, OR 97038

FINAL ORDER


Dear Steve:

The Special Standard request you submitted for owner: Colony Nursery Inc, Start Card number 174622, is approved for the following: You may temporarily move your drilling machine off of this well site prior to completion of the well while you wait for the well screen to arrive. A steel plate shall be welded between the 16 inch temporary surface casing and the 12 inch permanent well casing to keep debris from entering the sealing interval. Also the well shall be properly covered by placement of a welded steel cap on the 12 inch casing. The drilling rig shall be moved back on site no later than June 1, 2005. This Special Standard was verbally approved on May 17, 2005.

The Well Construction Standards serve to protect ground water resources. By approving and issuing this special construction standard the Oregon Water Resources Department is not representing that a well constructed in accordance with this condition will maintain structural integrity or that it meets engineering standards. The well constructor/or landowner is responsible for ensuring that a well is constructed in a manner that protects ground water resources as required under Oregon Administrative Rules 690-200 through 690-240.

If you have any questions regarding this letter, I may be contacted at (503) 986-0851, or by e-mail at Kristopher.R.Byrd@wrdd.state.or.us.

Sincerely,

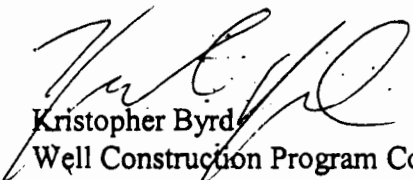

Kristopher Byrd
Well Construction Program Coordinator
Enforcement Section

enclosure

cc: Ken Wilcke, NW Region Well Inspector
File

This is a final order in other than contested case. This order is subject to judicial review under ORS 183.484. Any petition for judicial review must be filed within the 60 day time period specified by ORS 183.484(2). Pursuant to ORS 536.075 and OAR 137-004-0080 you may either petition for judicial review or petition the Director for reconsideration of this order. A petition for reconsideration may be granted or denied by the Director, and if no action is taken within 60 days following the date the petition was filed, the petition shall be deemed denied.

Oregon Water Resources Department

REQUEST FOR WRITTEN APPROVAL TO USE CONSTRUCTION METHODS NOT INCLUDED IN OREGON ADMINISTRATIVE RULES 690-200 THROUGH 690-240

Before the request can be considered, this form must be completed. Requests shall be submitted to the Well Construction Specialist, Water Resources Department, 725 Summer Street NE, Suite "A", Salem OR 97301-1271. Requests may also be considered by the appropriate Regional Manager.

Date of request: 5-18-05 **Oral approval date (if applicable):** 5-17-05

Bonded Well Constructor (name, license #, and mailing address): Steven N. Stadelin #688

36728 S. Kropf Rd. Molalla, OR 97038

(1) Location of Well: SE 1/4 SE 1/4 Tax lot 1400 Section 29

Township 4S N, Range 1E W, Clackamas County

Address at well site: 28877 S. Needy Rd. Canby, OR 97013

(2) Start Card Number(s)(for work to be done): 174622

(3) Name and Address of Land Owner: Colony Nursery Inc.

(4) Distance to the nearest septic tank, drainfield, closed sewage line (if water supply well)
100'+

(5) The unusual site conditions which necessitate this request: We finished drilling the well and need to temporarily move drill rig off well while waiting for well screen.

(6) The proposed construction methods that the bonded well constructor believes will be adequate for this well: (attach additional pages if needed)

1) 16" temporary surface casing installed to 90'+.

2) 12" permanent casing installed to 200' +/-.

3) Steel ring welded between 16"/12" casing.


4) Steel cap welded on 12" casing.

5) Drilling rig will be moved back on well no later than June 1, 2005.

W
DR

Remarks: May Remove Drill Rig until 6/1/2005

- (7) Diagram showing the pertinent features of the proposed well design and construction:
(attach additional pages if needed)

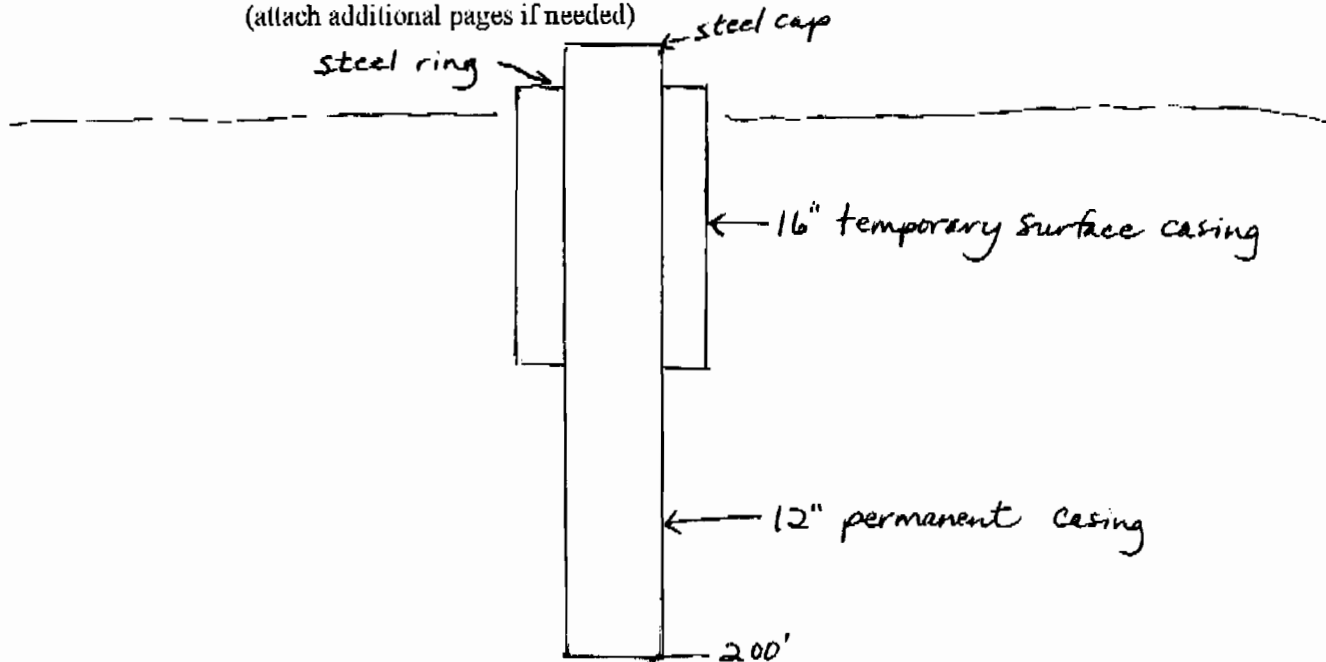

PLEASE NOTE:

- (1) **The Well Construction Standards serve to protect ground water resources. By approving and issuing this special construction standard the Oregon Water Resources Department is not representing that a well constructed in accordance with this condition will maintain structural integrity or that it meets engineering standards. The well constructor/or landowner is responsible for ensuring that a well is constructed in a manner that protects ground water resources as required under Oregon Administrative Rules 690-200 through 690-240.**
- (2) **If it should be determined at some future date that the well, due to its construction, is allowing ground water contamination, waste or loss of artesian pressure, the undersigned shall return to the site and rectify the problem.**
- (3) **If oral approval was granted, a written request must be submitted to the Department either within three (3) working days of the date of oral approval or prior to the completion of the associated well work. Failure to submit a written request as described above may void prior oral approval.**

I have read and understand the above information. I further attest that the information provided is accurate to the best of my knowledge.

Bonded Constructor Signature: Stew N. Stedile

