



# Oregon

John A. Kitzhaber, M.D., Governor

## Water Resources Department

Commerce Building  
158 12th Street NE  
Salem, OR 97310-0210  
(503) 378-3739  
FAX (503) 378-8130

August 12, 1998

en

Steve Stadel  
Westerberg Drilling, Inc.  
36728 S. Kropf Road  
Molalla, OR 97038

Dear Steve:

Please find enclosed a copy of the following approved special standard:

1. Workman's Airpark Water Association, Inc. (start card number 111453)

I have also discussed this issue with a representative of the Oregon Health Division and they concur that the special standard will provide adequate additional protection to the water bearing zone.

If you have any questions concerning this letter, please contact me at the address or phone number listed above, or by e-mail at [Robert.L.Carter@wrdd.state.or.us](mailto:Robert.L.Carter@wrdd.state.or.us).

Sincerely,

Rob Carter

Well Construction Specialist

cc: Dennis Nelson, OHD  
Richard Edwards, Well Inspector

m:\wp\ss98\stadelis.2

### Oregon Water Resources Department

#### REQUEST FOR WRITTEN APPROVAL TO USE CONSTRUCTION METHODS NOT INCLUDED IN OREGON ADMINISTRATIVE RULES 690-200 THROUGH 690-240

Before request can be considered, the following must be answered. Requests shall be submitted to the Well Construction Specialist, Water Resources Department. Requests may also be considered by the appropriate Regional Manager.

Date of request: 8-11-98

Bonded Well Constructor (name, license and mailing address): STEVEN N. STADELI #688  
WESTERBERG DRILLING INC. 36728 S. KROFF RD. MOLALLA, OR 97038

(1) Location of Well: NW 1/4 SE 1/4 of Section 22, Township 4S,  
Range 1E, CLACKAMAS County.  
Address at well site: 9588 S. GRIBBLE RD. CANBY, OR 97013

(2) Start Card Number(s): 111453

(3) Name and Address of Land Owner: WORKMAN'S AIRPARK WATER ASSOCIATION INC.  
9450 S. GRIBBLE RD. CANBY, OR 97013


(4) The distance to the nearest well, septic tank or drainfield (if water supply well): 86 FT.

(5) The unusual conditions which necessitate this request: SMALL LOT SIZES DON'T  
ALLOW THE NORMAL REQUIRED 100' SET BACK. (SEE ENCLOSED SITE MAP)

(6) The proposed construction methods that the well constructor believes will be adequate for this well (attach additional pages if needed)  
A CONTINUOUS GROUT SEAL TO 190'. THIS IS A REQUIREMENT OF THE  
WATER RIGHT PERMIT. #G-12872

W-DF

(7) Diagram showing the pertinent features of the proposed well design and construction (attach additional pages if needed):

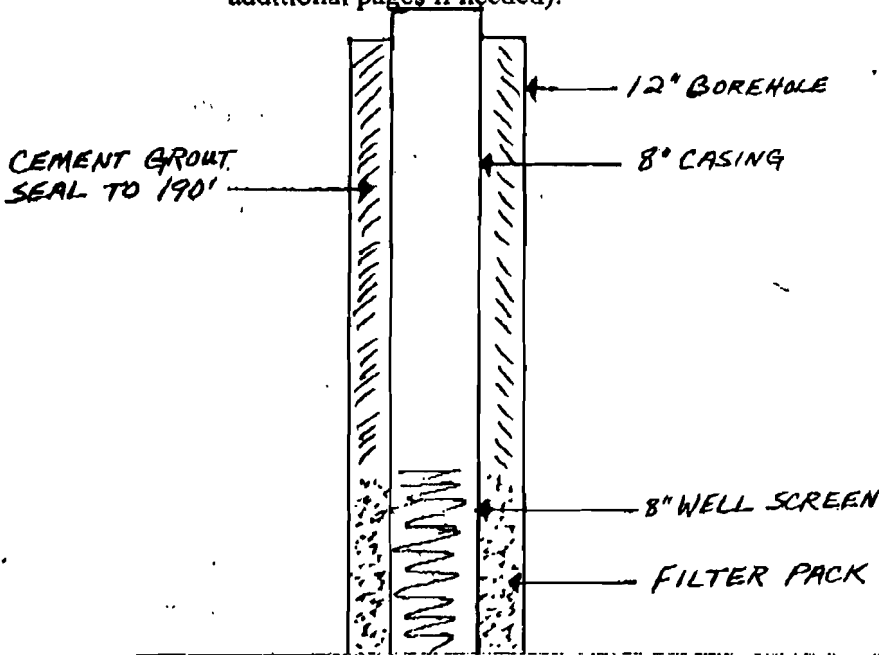

**PLEASE NOTE:**

- (1) If approved, all other phases of well construction must comply with the appropriate standards described in OAR 690-200 through 690-240.
- (2) If it should be determined at some future date that the well, due to its construction, is allowing groundwater contamination, waste or loss of artesian pressure, the undersigned shall return to the site and rectify the problem.
- (3) If verbal approval was granted, a written request must be submitted to the Department either within three (3) working days of the date of verbal approval or prior to the completion of the associated well work. Failure to submit a written request as described above may void prior approval.

I have read and understand the above information. I further attest that the information provided is accurate to the best of my knowledge.

Bonded Constructor Signature: Stevan H. Stodli # 688

*For Water Resources Department Use Only*

Date: 8-12-98

Approved by: [Signature] Denied by: \_\_\_\_\_

Remarks: \_\_\_\_\_ revised: 4-96

SEE MAP 4 IE 22  
W. Line Wm. Offield D.L.C. No 42

9400

SEE MAP 4 IE 22

SEE MAP 4 IE 22

E.F.U.-20

9600

86-05

1" = 200'

WELL LOCATION:

9588 S. GRIBBLE RD.  
T.L.# 700

SEE MAP 4 IE 22

980

