Approved:

MEMO

To: Kristopher Byrd, Well Construction Section Manager

From: Tommy Laird, Well Construction Program Coordinator

Subject: Review of Water Right Application G-18852

Date: October 19, 2023

The attached application was forwarded to the Well Construction Section by the Groundwater Section. Grayson Fish reviewed the application. Please see Grayson's Groundwater Review.

Applicant's Well #1 (Proposed Well): Well #1 is a proposed well, therefore it cannot be reviewed for construction. Construction of this proposed well shall be completed in a manner that protects ground water resources as required under Oregon Administrative Rules 690-200 through 690-240. During construction of this well, specific attention should be paid to ensure sealing requirements are met and that the well does not commingle aquifers.

The construction of proposed Well #1 may not satisfy hydraulic connection issues.

Groundwater Application Review Summary Form

Application # G- 18852
GW Reviewer Grayson F. Date Review Completed: 7/26/2023
Summary of GW Availability and Injury Review:
Groundwater for the proposed use is either over appropriated, will not likely be available in the amounts requested without injury to prior water rights, OR will not likely be available within the capacity of the groundwater resource per Section B of the attached review form.
Summary of Potential for Substantial Interference Review:
\square There is the potential for substantial interference per Section C of the attached review form.
Summary of Well Construction Assessment:
☐ The well does not appear to meet current well construction standards per Section D of the attached review form. Route through Well Construction and Compliance Section.
This is only a summary. Documentation is attached and should be read thoroughly to understand the basis for determinations and for conditions that may be necessary for a permit (if one is issued).

WATER RESOURCES DEPARTMENT

MEM	0								7/26/202	<u>23_</u>				
то:		Applica	ition G-	18852	-									
FRON	И:	GW: _6	Grayson Reviewer											
SUBJ	ECT: S	Scenic W	aterway	Interf	erence l	Evaluat	ion							
\boxtimes	YES	The	source o	of appro	propriation is hydraulically connected to a State Scenic									
	NO		erway o		-	y		,						
\boxtimes	YES													
	NO	Use	the Scen	nic Wate	erway C	Conditio	n (Cond	lition 7J)					
\boxtimes	interfe	RS 390.8 grence with the service is contact.	h surfac	e water	that con					_				
	interfe Depar propo	RS 390.8 rence with trent is sed use ain the fi	h surfac unable will me	e water to find easurab	that cor that the ly redu	ntributes ere is a ace the	to a sce prepone surface	enic wat derance e water	erway; e of evic	therefo dence tl	re, the			
Calculo per crit the Dep	ite the pe eria in 3 partment	ION OF I rcentage of 90.835, do is unable to	f consump not fill in o make a l	tive use b the table Preponde	y month of but check rance of	k the "und Evidence	ıble" opti finding.	on above,	, thus info	orming W				
Water	way by	the follo	wing an			•					use by v	which		
Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec]		
		d memo "	-		oundw	ater Pu	nping I	mpacts	on Scen	nic Wa	terway			
Flow	s" date	ed: Febru	ıary 19,	2013										

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO:		Water I	Rights Secti	on		Date								
FROM	:	Ground	water Secti	on		Grayson								
SUBJE	СТ	Annlies	tion G- _18	2052	C		ver's Name		6/16/2020					
SODIL	C1.	Арриса		0032_	<u>L</u>	uperseue	S TEVIEV	V OI	0/10/2020		D	ate of Revi	ew(s)	
DUDI		DEGE I	DECLIMA	TION (SDOUND									
			PRESUMP					wate	er use will en	sura tha	nrasar	vation of	the nubli	i c
									groundwater					
									e proposed us					
									igency polici					
A. <u>GE</u> I	NERAL 1	INFOR	MATION:	App	olicant's Na	ame: F	ive Mile	Ra	nch		Co	ounty: <u>F</u>	Klamath	
A1.	Applican	t(s) seek	(s) <u>0.25</u>	cfs from	1	well(s)) in the _]	Klamath					Basin,
	S ₁	orague				subbas	sin							
4.0	D.		G. 1.Y	£7 ,		a	11.	3 7						
A2.	Proposed	use	Stock V	Vater		Seaso	nality: _	Yea	ar-round					
A3.	Well and	aquifer	data (attach	and num	ber logs fo	or existing	wells; n	nark	k proposed v	wells as s	uch ur	nder logi	d):	
Well	Logic	i	Applicant's	Propose	d Aquifer*	Propo			Location		Location, metes and bounds, e.g			
1	PROF		Well #	_	edrock	Rate(0			(T/R-S QQ-Q 35S/13E-29 SES		2250' N, 1200' E fr NW cor S 36 1269'N, 2515'E of SE cor S28			
2	11101		-			0.20			500,102 2, 525	,,,	1207	1,,2010 1	01 52 001 5	20
3 4														
	ım, CRB, E	Bedrock		L		L								
	Well	First	1		Well	Seal	Cosim	~	Liner	Perfora	tions	Well	Danser	1
Well	Elev	Water	SWL		Depth	Interval	Casin Interva		Intervals	Or Sci		Yield	Draw Down	Test
	ft msl	ft bls	ft bls	Date	(11)		(ft) (ft))	(gpm)	(ft)	Type
1	4450	-	100-150*	-	360	0-300	0-300)	-	-		-	-	-
II. 1.	C 1:		1 1	1										
Use data	from appli	cation for	proposed wel	IIS.										
A4.			he applicant'	s well is p	proposed; b	ased on re	view fro	m w	ell logs nearl	by, SWL	will li	kely be b	etween 1	<u>00</u>
	and 150 f	t BLS												
	-													
A5. 🗆	Provision	ns of the	<u>.</u>				Basin	rule	es relative to	the deve	lonmer	nt. classif	ication a	nd/or
									are, or					
	_	_	es contain su	•	•	icu to surre	ice water		arc, or	are not,	activat	cd by till.	з аррпса	.1011.
			os comun su											
	-													
, ₋ -	*** 11/ \ /	ı								11 1. 1.			.•	
A6. ∐									s) an aquifer				ıtıve resti	riction.
	Commen	auminis ts:	ıranve area:											

B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

B1.	Base	ed upon available data, I have determined that groundwater* for the proposed use:
	a.	\square is over appropriated, \boxtimes is not over appropriated, or \square cannot be determined to be over appropriated during any period of the proposed use. * This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
	b.	\square will not or \square will likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
	c.	\square will not or \square will likely to be available within the capacity of the groundwater resource; or
	d.	 will, if properly conditioned, avoid injury to existing groundwater rights or to the groundwater resource: i.
B2.	a.	☐ Condition to allow groundwater production from no deeper than ft. below land surface;
	b.	○ Condition to allow groundwater production from no shallower than ft. below land surface;
	c.	☐ Condition to allow groundwater production only from the groundwater reservoir between approximately ft. and ft. below land surface;
	d.	 ■ Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section. Describe injury —as related to water availability—that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc):
B3.	aqui POA how elev 214: 103- hydr betw obse Ava there is no in B	undwater availability remarks: The applicants proposed well would develop water from the "crystalline volcanic fer that underly the Sprague River valley. There are limited water level data in the vicinity of the applicant's proposed A. The closest observation wells KLAM 1621 and KLAM 10343 are over 2 miles away in the westerly direction; ever, these wells extend into the volcanic rock at depths greater than 300 feet below land surface and groundwater attions are likely be similar to the proposed well. Similarly, observation wells KLAM 2129, KLAM 10603 and KLAM 5 are over six miles to the southeast but have similar groundwater elevations (within 5 feet) as KLAM 1621 and KLAM 43. In general, the hydrographs follow climatic trends with approximately 5 feet of decline over the period of record. The rograph of KLAM 10343 shows similar groundwater elevations as the other wells considered through 2005. However, ween 2005 and 2023, groundwater elevation in KLAM 10343 declined approximately 20 feet. The groundwater declines broad in KLAM 10343 do appear to be anomalous compared to other wells in this portion of the Sprague River Valley, illable groundwater level data in the noted wells do not display excessive declines or excessively declining trends, after there is not a preponderance of evidence that groundwater of the target aquifer is over appropriated. Similarly, there are a preponderance of evidence that the proposed use would not be within the capacity of the resource and so conditions 1(d) are recommended. The is one permitted groundwater right that is located approx. 1400 ft from the proposed POA. Given the nature of the fer system in the area (high-transmissivity, high-yield) and the depth of the nearby permitted well (312 ft with 150 ft L), it is unlikely that the applicant's use of 0.25 cfs would produce enough hydrologic interference to result in injury to
		or other, permitted water rights. However, standard interference conditions should be applied.

C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. **690-09-040** (1): Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Crystalline Rocks associated with Winema Volcanics	\boxtimes	

Basis for aquifer confinement evaluation: The crystalline volcanic aquifer ("basalts") that the well is proposed to be completed in are overlain by over 200ft of sedimentary material ("Yonna Fm.") frequently referred to as "clay" on drillers' logs. The presence of a thick clay-rich layer will increase confinement of the underlying rock units.

C2. **690-09-040** (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)		Conne	ulically ected? ASSUMED	Potentia Subst. In Assum YES	terfer.
1	1	Snake Creek	4350	4350	15700	×				⊠
1	2	Sprague River near Beatty Gap	4350	4322	21200	×				⊠

Basis for aquifer hydraulic connection evaluation: <u>SWLs</u> reported for well logs nearby correspond to elevations that are near the elevation of Snake creek and above the elevation of Sprague River near Beatty Gap; distances measured are to the nearest point where the streambed crosses the estimated groundwater elevation.

Water Availability Basin the well(s) are located within: $\underline{SYCAN\ R > Sprague\ R - AT\ MOUTH\ (ID\#\ 70823)}$ And hydraulically connected to: $\underline{SPRAGUE\ R > WILLIAMSON\ R - AB\ SYCAN\ R\ (ID\#\ 70804)}$

C3a. **690-09-040** (4): Evaluation of stream impacts for <u>each well</u> that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water (SW) source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that SW source, not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% *natural* flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked ⋈ box indicates the well is assumed to have the potential to cause PSI.

Wel	SW #	Well < ½ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be hydraulically connected and less than 1 mile from a surface water source. Complete only if Q is distributed among wells. Otherwise same evaluation and limitations apply as in C3a above.

	#	Qw > 5 cfs?	Instream Water Right	Instream Water Right Q	Qw > 1% ISWR?	80% Natural Flow	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer.
			ID	(cfs)	15 // 10.	(cfs)	Flow?	(70)	Assumed?

Comments: N/A

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-D	istributed	Wells											
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
1	1	<1 %	<1 %	<1 %	<1 %	<1 %	<1 %	<1 %	<1 %	<1 %	<1 %	<1 %	<1 %
Well (Q as CFS	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Interfer	ence CFS	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
$(\mathbf{A}) = \mathbf{T}\mathbf{c}$	otal Interf.	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
(B) = 80	% Nat. Q	34.3	43.3	64.4	128	136	56.2	31.4	28.3	27.1	26.8	33.8	33.3
(C) = 1	% Nat. Q	0.34	0.43	0.64	1.28	1.36	0.56	0.31	0.28	0.27	0.27	0.34	0.33
(D) =	(A) > (C)	√											
$(\mathbf{E}) = (\mathbf{A}$	/ B) x 100	<<1%	<<1%	<<1%	<<1%	<<1%	<<1%	<<1%	<<1%	<<1%	<<1%	<<1%	<<1%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

Basis for impact evaluation: Stream-depletion was estimated to Snake Creek using the Hunt (2003) stream-depletion model with parameter values informed by Gannett et al. (2021) and using methods previously used by the Department for estimating steam-depletion in the Klamath Basin. The main control on stream-depletion for this application is the distance to the nearest, hydraulically-connected stream reach, which is based on assumed static water levels and on proposed construction. Stream-depletion estimates are assumed to be different if the well is not constructed as proposed.

C4b. 690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.

C5. 🗆	If properly conditioned, the surface water source(s) can be adequately protected from interference, and/or groundwater use
	under this permit can be regulated if it is found to substantially interfere with surface water:
	i. The permit should contain condition #(s)
	_

ii.

The permit should contain special condition(s) as indicated in "Remarks" below;

C6. SW / GW Remarks and Conditions: The applicant's proposed POAs would be producing form an aquifer that has been found to be hydraulically connected to surface water – specifically Snake Creek and the Sprague river- at distances of just over 3 miles. Stream-depletion was estimated using standard practices of the Department and the proposed rate and level of impact does not reach the level where PSI is assumed.

Version: 07/28/2020

6

References Used:

Gannett, M. W., B. J. Wagner, and K. E. Lite. 2012. *Groundwater Simulation and Management Models for the Upper Klamath Basin, Oregon and California*. USGS Scientific Investigations report 2012-5062.

Gannett, M. W., K. E. Lite, J. L. LaMarche, B. J. Fisher, and D. J. Polette. 2007. *Ground-water Hydrology of the Upper Klamath Basin, Oregon and California*. USGS Scientific Investigations Report 2007-5050

Hunt, B. 2003. *Unsteady Stream Depletion when Pumping from a Semiconfined Aquifer*. Journal of Hydrologic Engineering. Vol 8(1), pp 12-19

<u>Leonard, A. R. and A. B. Harris. 1974. Ground Water in Selected Areas in the Klamath Basin, Oregon. Ground Water Report No. 21. Oregon State Engineer</u>

Sherrod, D. R., and L. B. G. Pickthorn. 1992. *Geologic Map of the West Half of the Klamath Falls 1° by 2° Quadrangle, South-Central Oregon*. USGS Miscellaneous Investigations Series Map I-2182.

Oregon Department of Geology and Mineral Industries, Geologic Map of Oregon. http://www.oregongeology.org/geologicmap/

OWRD Well Log Database - Accessed 07/26/2023

D. WELL CONSTRUCTION, OAR 690-2

D1.	Well #:	Logid:
D2.	THE W	ELL does not appear to meet current well construction standards based upon:
	a. 🗆	review of the well log;
	b. 🗆	field inspection by;
	c. 🗆	report of CWRE
	d. 🗆	other: (specify)
D3.	THE W	VELL construction deficiency or other comment is described as follows:
D4. [Route	to the Well Construction and Compliance Section for a review of existing well construction.

Water Availability Tables

Water Availability Analysis

Detailed Reports

SYCAN R > SPRAGUE R - AT MOUTH KLAMATH BASIN

Water Availability as of 7/26/2023

Watershed ID #: 70823 (<u>Map</u>)
Date: 7/26/2023

Exceedance Level: 80% V

Water Availability Calculation Consumptive Uses and Storages

Water Rights

Instream Flow Requirements Reservations

Watershed Characteristics

Watershed Characteristics

Water Availability Calculation

Monthly Streamflow in Cubic Feet per Second Annual Volume at 50% Exceedance in Acre-Feet

Month	Natural Stream Flow	Consumptive Uses and Storages	Expected Stream Flow	Reserved Stream Flow	Instream Flow Requirement	Net Water Available
JAN	34.30	0.10	34.20	0.00	71.00	-36.80
FEB	43.30	0.10	43.20	0.00	106.00	-62.80
MAR	64.40	2.42	62.00	0.00	237.00	-175.00
APR	128.00	4.88	123.00	0.00	342.00	-219.00
MAY	136.00	11.70	124.00	0.00	357.00	-233.00
JUN	56.20	15.70	40.50	0.00	150.00	-109.00
JUL	31.40	9.94	21.50	0.00	45.00	-23.50
AUG	28.30	5.89	22.40	0.00	30.00	-7.59
SEP	27.10	5.48	21.60	0.00	25.00	-3.38
OCT	26.80	3.57	23.20	0.00	28.00	-4.77
NOV	33.80	0.10	33.70	0.00	48.00	-14.30
DEC	33.30	0.10	33.20	0.00	65.00	-31.80
ANN	80,400.00	3,630.00	76,700.00	0.00	90,800.00	2,560.00

Water Availability Analysis

Detailed Reports

SPRAGUE R > WILLIAMSON R - AB SYCAN R KLAMATH BASIN

Water Availability as of 7/26/2023

Watershed ID #: 70804 (Map) Date: 7/26/2023

Buto. 1720/2020

Water Rights

Exceedance Level: 80% V

Reservations

Consumptive Uses and Storages

Water Availability Calculation


Instream Flow Requirements

Monthly Streamflow in Cubic Feet per Second Annual Volume at 50% Exceedance in Acre-Feet

Month	Natural Stream Flow	Consumptive Uses and Storages	Expected Stream Flow	Reserved Stream Flow	Instream Flow Requirement	Net Water Available
JAN	165.00	5.16	160.00	0.00	100.00	59.80
FEB	191.00	6.77	184.00	0.00	100.00	84.20
MAR	250.00	19.50	230.00	0.00	240.00	-9.52
APR	377.00	52.20	325.00	0.00	366.00	-41.20
MAY	440.00	117.00	323.00	0.00	444.00	-121.00
JUN	273.00	91.10	182.00	0.00	249.00	-67.10
JUL	144.00	28.10	116.00	0.00	118.00	-2.09
AUG	114.00	15.20	98.80	0.00	85.00	13.80
SEP	128.00	16.00	112.00	0.00	95.00	17.00
OCT	153.00	10.20	143.00	0.00	110.00	32.80
NOV	157.00	4.62	152.00	0.00	114.00	38.40
DEC	162.00	4.99	157.00	0.00	100.00	57.00
ANN	209,000.00	22,500.00	187,000.00	0.00	128,000.00	58,700.00


Application G-18852 Date: 7/26/2023

Well Location Map

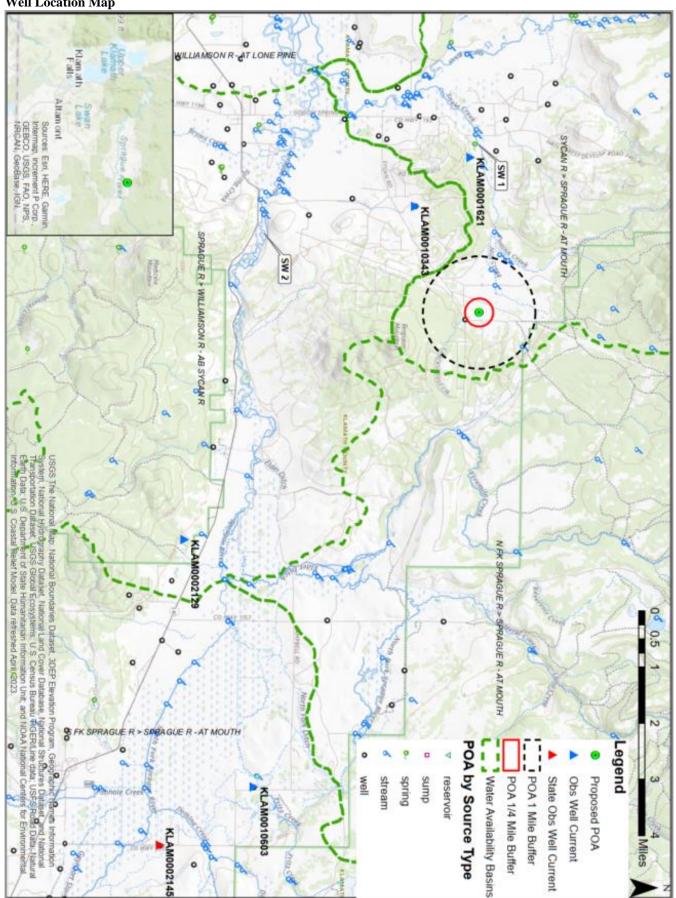

Page


Water-Level Measurements in Nearby Wells

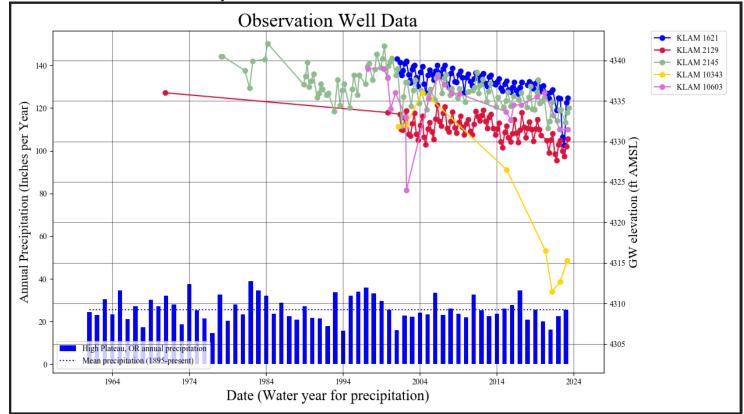

Date: 7/26/2023

11

Stream-Depletion Model Results

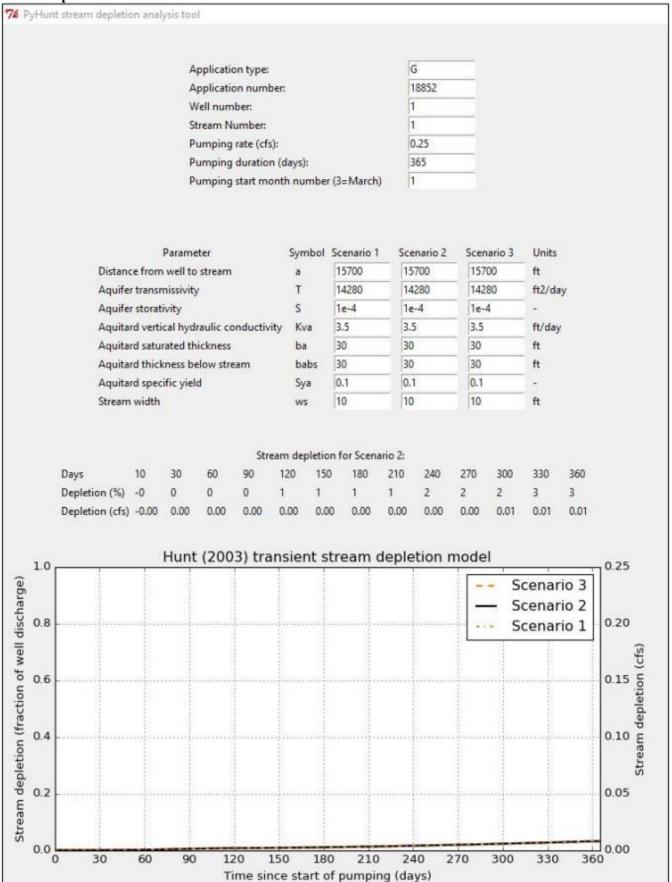

Appendix Memo: Analysis of Groundwater Pumping Impacts on Scenic Waterway Flows



Memorandum

To: Barry Norris – Administrator, Technical Services Division

Dwight French - Administrator, Waterights Division

Tom Paul - Deputy Director

Doug Woodcock - Administrator, Field Services Division

From: Ivan Gall – Manager, Groundwater Section

Date: February 19, 2013

Subject: Analysis of Groundwater Pumping Impacts on Klamath Scenic Waterway Flows

In 1971 the Oregon Legislature created the Scenic Waterway Act, codified by Oregon Revised Statutes 390.805 to 390.925, to preserve for the benefit of the public Waldo Lake and selected parts of the state's free-flowing rivers. The Klamath Scenic Waterway was part of the Act and includes the Klamath River from the John Boyle Dam powerhouse downstream to the Oregon-California border. Under the Act, the Water Resources Commission is allowed to allocate small amounts of surface water for human consumption and livestock watering, as long as issuing the water right does not significantly impair the free-flowing character of these waters in quantities necessary for recreation, fish and wildlife, and the amount allocated may not exceed a cumulative total of one percent of the average daily flow or one cubic foot per second (cfs), whichever is less.

In 1995 the Scenic Waterway Act was modified to address the impact of groundwater uses that, based upon a preponderance of evidence, would measurably reduce the surface water flows within a scenic waterway. "Measurably reduce" means that the use authorized will individually or cumulatively reduce surface water flows within the scenic waterway in excess of a combined cumulative total of one percent of the average daily flow or one cfs, whichever is less.

In 2012 the United States Geological Survey (USGS), in cooperation with OWRD and the US Bureau of Reclamation, completed groundwater flow and management models for the Upper Klamath Basin. The 2012 groundwater flow model uses generally accepted hydrogeologic methods and the relevant field data to model the cumulative effects of groundwater pumping within the Klamath Scenic Waterway, and provides a comprehensive methodology for analyzing the relevant field data necessary to determine whether the cumulative use of groundwater in the Klamath Basin will measurably reduce the surface water flow necessary to maintain the free-flowing character of the Klamath Scenic Waterway.

In September 2012 the OWRD Groundwater Section conducted two model simulations. The two simulations used the 2012 USGS flow model, incorporating groundwater permits issued (61.96 cfs) since adoption of the 1995 Scenic Waterway Act amendment up through 2004. Each simulation was run to steady-state, where inflows and outflows for that model run balanced. An evaluation of the water budgets showed that groundwater discharge to the Klamath Scenic Waterway decreased by 5.88 cfs as a result of the 61.96 cfs of groundwater uses issued between 1995 and 2004. These results indicate to the OWRD that a preponderance of evidence exists to establish that groundwater development occurring in the Upper Klamath Basin in Oregon since 1995 has "measurably reduced" surface water flows within the Klamath Scenic Waterway.

In January 2013 the OWRD Groundwater Section conducted flow model simulations to evaluate impacts to streams from pumping groundwater within the Lost River subbasin. Groundwater pumping was simulated by placing wells in the model that correspond to the center of 39 townships in the southeast part of the Klamath Basin in Oregon. Each of the simulations was run to steady-state, where inflows and outflows for that model run balanced. These results indicate that the scenic waterway is impacted by pumping groundwater in all of the townships evaluated in Oregon in the Lost River subbasin. In summary, a preponderance of evidence exists to establish that groundwater development occurring in Oregon since 1995 in the Upper Klamath Basin and Lost River subbasin has "measurably reduced" surface water flows within the Klamath Scenic Waterway.

References:

Gannett, M.W., Lite, K.E., Jr., La Marche, J.L., Fisher, B.J., and Polette, D.J., 2007. Ground-water hydrology of the upper Klamath Basin, Oregon and California: U.S. Geological Survey Scientific Investigations Report 2007-5050, 84p.

Gannett, M.W., Wagner, B.J., and Lite, K.E., Jr., 2012. Groundwater simulation and management models for the upper Klamath Basin, Oregon and California: U.S. Geological Survey Scientific Investigations Report 2012-5062, 92p.

13