

**PUBLIC INTEREST REVIEW FOR GROUND WATER APPLICATIONS**

TO: Water Rights Section Date March 23, 2010

FROM: Ground Water/Hydrology Section Karl Wozniak  
Reviewer's Name

SUBJECT: Application G- 17293 Supersedes review of \_\_\_\_\_  
Date of Review(s)

**PUBLIC INTEREST PRESUMPTION; GROUNDWATER**

**OAR 690-310-130 (1)** *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525.* Department staff review ground water applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. **This review is based upon available information and agency policies in place at the time of evaluation.**

**A. GENERAL INFORMATION:** Applicant's Name: Carlton Nursery Company, Inc County: Yamhill

A1. Applicant(s) seek(s) 1.0 cfs from 4 well(s) in the Willamette Basin,  
Yamhill River subbasin Quad Map: Dayton

A2. Proposed use: Nursery & Pond Maintenance Seasonality: Year Round

A3. Well and aquifer data (attach and number logs for existing wells; mark proposed wells as such under logid):

Well 1	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	Proposed	1	Alluvium	1.0	5S/3W-5 SE/NW	780' S, 0' W fr SE cor DLC 42
2	Proposed	2	Alluvium	1.0	5S/3W-5 NW/SW	1690' S, 60' W fr SE cor DLC 42
3	Proposed	3	Alluvium	1.0	5S/3W-5 NW/SE	2520' S, 2230' E fr SE cor DLC 42
4	Proposed	4	Alluvium	1.0	5S/3W-5 NE/SE	1970' S, 3540' E fr SE cor DLC 42
5	Proposed	DT 1	Alluvium	?	5S/3W-5 SE/NW	40' S, 310' E fr SE cor DLC 42
6	Proposed	DT 2	Alluvium	?	5S/3W-5 SE/NW	70' S, 640' E fr SE cor DLC 42

\* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	158				350	>80	>=20		100-350			
2	158				350	>80	>=20		100-350			
3	162				350	>80	>=20		100-350			
4	162				350	>80	>=20		100-350			
5	158											
6	158											

Use data from application for proposed wells.

A4. **Comments:** The application lists 4 proposed wells and 2 proposed drain tiles as sources of water. Rates were not specified for the drain tiles.

A5.  **Provisions of the Willamette** \_\_\_\_\_ Basin rules relative to the development, classification and/or management of ground water hydraulically connected to surface water  are, or  are not, activated by this application. (Not all basin rules contain such provisions.)

Comments: The wells will produce from a confined aquifer so the pertinent rules do not apply. The drain tiles produce from an unconfined aquifer (the water table in the Willamette Silt) but are greater than 1/4 mile from the nearest surface water source so the pertinent rules do not apply.

A6.  Well(s) # \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, tap(s) an aquifer limited by an administrative restriction. Name of administrative area: \_\_\_\_\_  
 Comments: \_\_\_\_\_

**B. GROUND WATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070**

B1. Based upon available data, I have determined that ground water\* for the proposed use:

- a.  is over appropriated,  is not over appropriated, or  cannot be determined to be over appropriated during any period of the proposed use. \* This finding is limited to the ground water portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b.  will not or  will likely be available in the amounts requested without injury to prior water rights. \* This finding is limited to the ground water portion of the injury determination as prescribed in OAR 690-310-130;
- c.  will not or  will likely to be available within the capacity of the ground water resource; or
- d.  will, if properly conditioned, avoid injury to existing ground water rights or to the ground water resource:
  - i.  The permit should contain condition #(s) 7C and large water-use reporting for each well (but not the drain tiles);
  - ii.  The permit should be conditioned as indicated in item 2 below.
  - iii.  The permit should contain special condition(s) as indicated in item 3 below;

- B2. a.  Condition to allow ground water production from no deeper than \_\_\_\_\_ ft. below land surface;
- b.  Condition to allow ground water production from no shallower than \_\_\_\_\_ ft. below land surface;
- c.  Condition to allow ground water production only from the alluvial ground water reservoir between approximately \_\_\_\_\_ ft. and \_\_\_\_\_ ft. below land surface;
- d.  Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Ground Water Section.

**Describe injury** –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

B3. **Ground water availability remarks:** Over 200 feet of predominantly fine-grained sediments occur in the vicinity of the proposed wells (the upper 80-100 feet is identified by the U.S. Geological Survey as the Willamette Silt hydrogeologic unit). Productive sand and gravel beds are found at various depths but are generally less than 20 feet thick and rarely have a combined thickness of more than 50 feet. Some sand beds occur at depths less than 50 feet. Well yields in the area are variable but large diameter wells are capable of producing 200-400 gpm. The water table occurs at shallow depths, generally less than 20 feet within the Willamette Silt. Local streams are incised to depths of of 30-50 feet below the valley floor in the area. Wells that produce from sand or gravel beds near or above this level will have a direct hydraulic connection to nearby streams. Wells that produce from sand and gravel beds below this level will have an indirect hydraulic connection to local streams.

Very few water levels are available from alluvial wells in the surrounding area. However, a long-term observation well located about 1.5 miles to the northeast shows no progressive declines (see attached plot). Because water-level data is sparse and the aquifer is relatively thin, water-level measurement and decline conditions are recommended if a permit is issued.

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**C. GROUND WATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040**

**C1. 690-09-040 (1): Evaluation of aquifer confinement:**

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Alluvium	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Alluvium	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	Alluvium	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	Alluvium	<input checked="" type="checkbox"/>	<input type="checkbox"/>
5	Unconfined alluvium (Willamette Silt)	<input type="checkbox"/>	<input checked="" type="checkbox"/>
6	Unconfined alluvium (Willamette Silt)	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Basis for aquifer confinement evaluation:** Static water levels generally occur above the producing sand and gravel beds identified on well logs in the area. This is consistent with the occurrence of relatively thin sand and gravel beds in a thick column of predominantly fine-grained sediments. However, the drain tiles will produce water from the water table which by definition is unconfined.

**C2. 690-09-040 (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.**

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
1	1	Palmer Creek	140	110-120	2800	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
1	2	West Fork Palmer Creek	140	110-120	4300	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2	1	Palmer Creek	140	110-120	2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2	2	West Fork Palmer Creek	140	110-120	4700	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
3	1	Palmer Creek	120	110-120	1130	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
3	2	West Fork Palmer Creek	120	110-120	7200	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
4	1	Palmer Creek	120	110-120	1200	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
4	2	West Fork Palmer Creek	120	110-120	8000	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
5	1	Palmer Creek	140	110-120	3300	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
6	1	Palmer Creek	140	110-120	3000	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Basis for aquifer hydraulic connection evaluation:** Water table maps indicate flow towards and discharge into Palmer Creek and West Palmer Creek. This indicates hydraulic connection between the aquifer and these streams. It was assumed that drain tile water, if not captured for use, would discharge into Palmer Creek which implies a direct hydraulica connection to the creek. Water Availability Basin the well(s) are located within: Yamhill R > Willamette R - At Mouth

**C3a. 690-09-040 (4): Evaluation of stream impacts for each well that has been determined or assumed to be hydraulically connected and less than 1 mile from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% natural flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked  box indicates the well is assumed to have the potential to cause PSI.**

Well	SW #	Well < ¼ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
1	1	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	.565	<input checked="" type="checkbox"/>	<25	<input checked="" type="checkbox"/>
1	2	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	.565	<input checked="" type="checkbox"/>	<25	<input checked="" type="checkbox"/>
2	1	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	.565	<input checked="" type="checkbox"/>	<25	<input checked="" type="checkbox"/>
2	2	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	.565	<input checked="" type="checkbox"/>	<25	<input checked="" type="checkbox"/>
3	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	.565	<input checked="" type="checkbox"/>	<25	<input checked="" type="checkbox"/>
4	1	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	.565	<input checked="" type="checkbox"/>	<25	<input checked="" type="checkbox"/>

<b>5</b>	<b>1</b>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<b>.565</b>	<input type="checkbox"/>	<b>100</b>	<input checked="" type="checkbox"/>
<b>6</b>	<b>1</b>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<b>.565</b>	<input type="checkbox"/>	<b>100</b>	<input checked="" type="checkbox"/>

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

	SW #	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

**Comments:** Because the productive sand and gravel beds are confined, stream depletion at 30 days is expected to be much less than 25% of the pumping rate for the proposed wells. This assumes that the well construction will not allow production from depths less than 80 feet as proposed in section C6 below. If not, interference could be substantially greater. Since drain tile water would discharge instantaneously to Palmer Creek if no water was diverted from the tiles, stream depletion will be 100% of the diversion rate at any time diversion occurs from the drain tiles.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

<b>Non-Distributed Wells</b>													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
<b>Distributed Wells</b>													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
(A) = Total Interf.													
(B) = 80 % Nat. Q													
(C) = 1 % Nat. Q													
(D) = (A) > (C)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
(E) = (A / B) x 100		%	%	%	%	%	%	%	%	%	%	%	%



**D. WELL CONSTRUCTION, OAR 690-200**

D1. Well #: \_\_\_\_\_ Logid: \_\_\_\_\_

D2. **THE WELL does not meet current well construction standards based upon:**

- a.  review of the well log;
- b.  field inspection by \_\_\_\_\_;
- c.  report of CWRE \_\_\_\_\_;
- d.  other: (specify) \_\_\_\_\_

D3. **THE WELL construction deficiency:**

- a.  constitutes a health threat under Division 200 rules;
- b.  commingles water from more than one ground water reservoir;
- c.  permits the loss of artesian head;
- d.  permits the de-watering of one or more ground water reservoirs;
- e.  other: (specify) \_\_\_\_\_

D4. **THE WELL construction deficiency is described as follows:** \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

- D5. **THE WELL**
- a.  was, or  was not constructed according to the standards in effect at the time of original construction or most recent modification.
  - b.  I don't know if it met standards at the time of construction.

D6.  **Route to the Enforcement Section.** I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Enforcement Section and the Ground Water Section.

**THIS SECTION TO BE COMPLETED BY ENFORCEMENT PERSONNEL**

D7.  Well construction deficiency has been corrected by the following actions: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_, 200\_\_\_\_.  
(Enforcement Section Signature)

D8.  **Route to Water Rights Section (attach well reconstruction logs to this page).**

\_\_\_\_\_

\_\_\_\_\_

## Water Availability Tables

YAMHILL R > WILLAMETTE R - AT MOUTH  
WILLAMETTE BASIN

Water Availability as of 1/19/2010

Watershed ID #: 30200801

Exceedance Level: 80%

Date: 1/19/2010

Time: 12:10 PM

Water Availability Calculation

Consumptive Uses and Storages

Instream Flow Requirements

Reservations

Water Rights

Watershed Characteristics


## Water Availability Calculation

Monthly Streamflows in Cubic Feet per Second  
Storage at 50% Exceedance in Acre-Feet

Month	Natural Stream Flow	Consumptive Uses and Storages	Expected Stream Flow	Reserved Stream Flow	Instream Flow Requirement	Net Water Available
JAN	1,840.00	67.60	1,770.00	0.00	31.70	1,740.00
FEB	2,070.00	65.40	2,000.00	0.00	31.70	1,970.00
MAR	1,760.00	43.00	1,720.00	0.00	31.70	1,690.00
APR	1,060.00	51.50	1,010.00	0.00	31.70	977.00
MAY	523.00	69.30	454.00	0.00	31.70	422.00
JUN	232.00	93.00	139.00	0.00	31.70	107.00
JUL	108.00	117.00	-8.84	0.00	31.70	-40.50
AUG	66.90	101.00	-34.50	0.00	31.70	-66.20
SEP	56.50	65.40	-8.87	0.00	31.70	-40.60
OCT	72.50	19.60	52.90	0.00	31.70	21.20
NOV	462.00	40.20	422.00	0.00	31.70	390.00
DEC	1,670.00	64.50	1,610.00	0.00	31.70	1,570.00
STO	1,180,000.00	48,200.00	1,130,000.00	0.00	23,000.00	1,110,000.00



Location Map

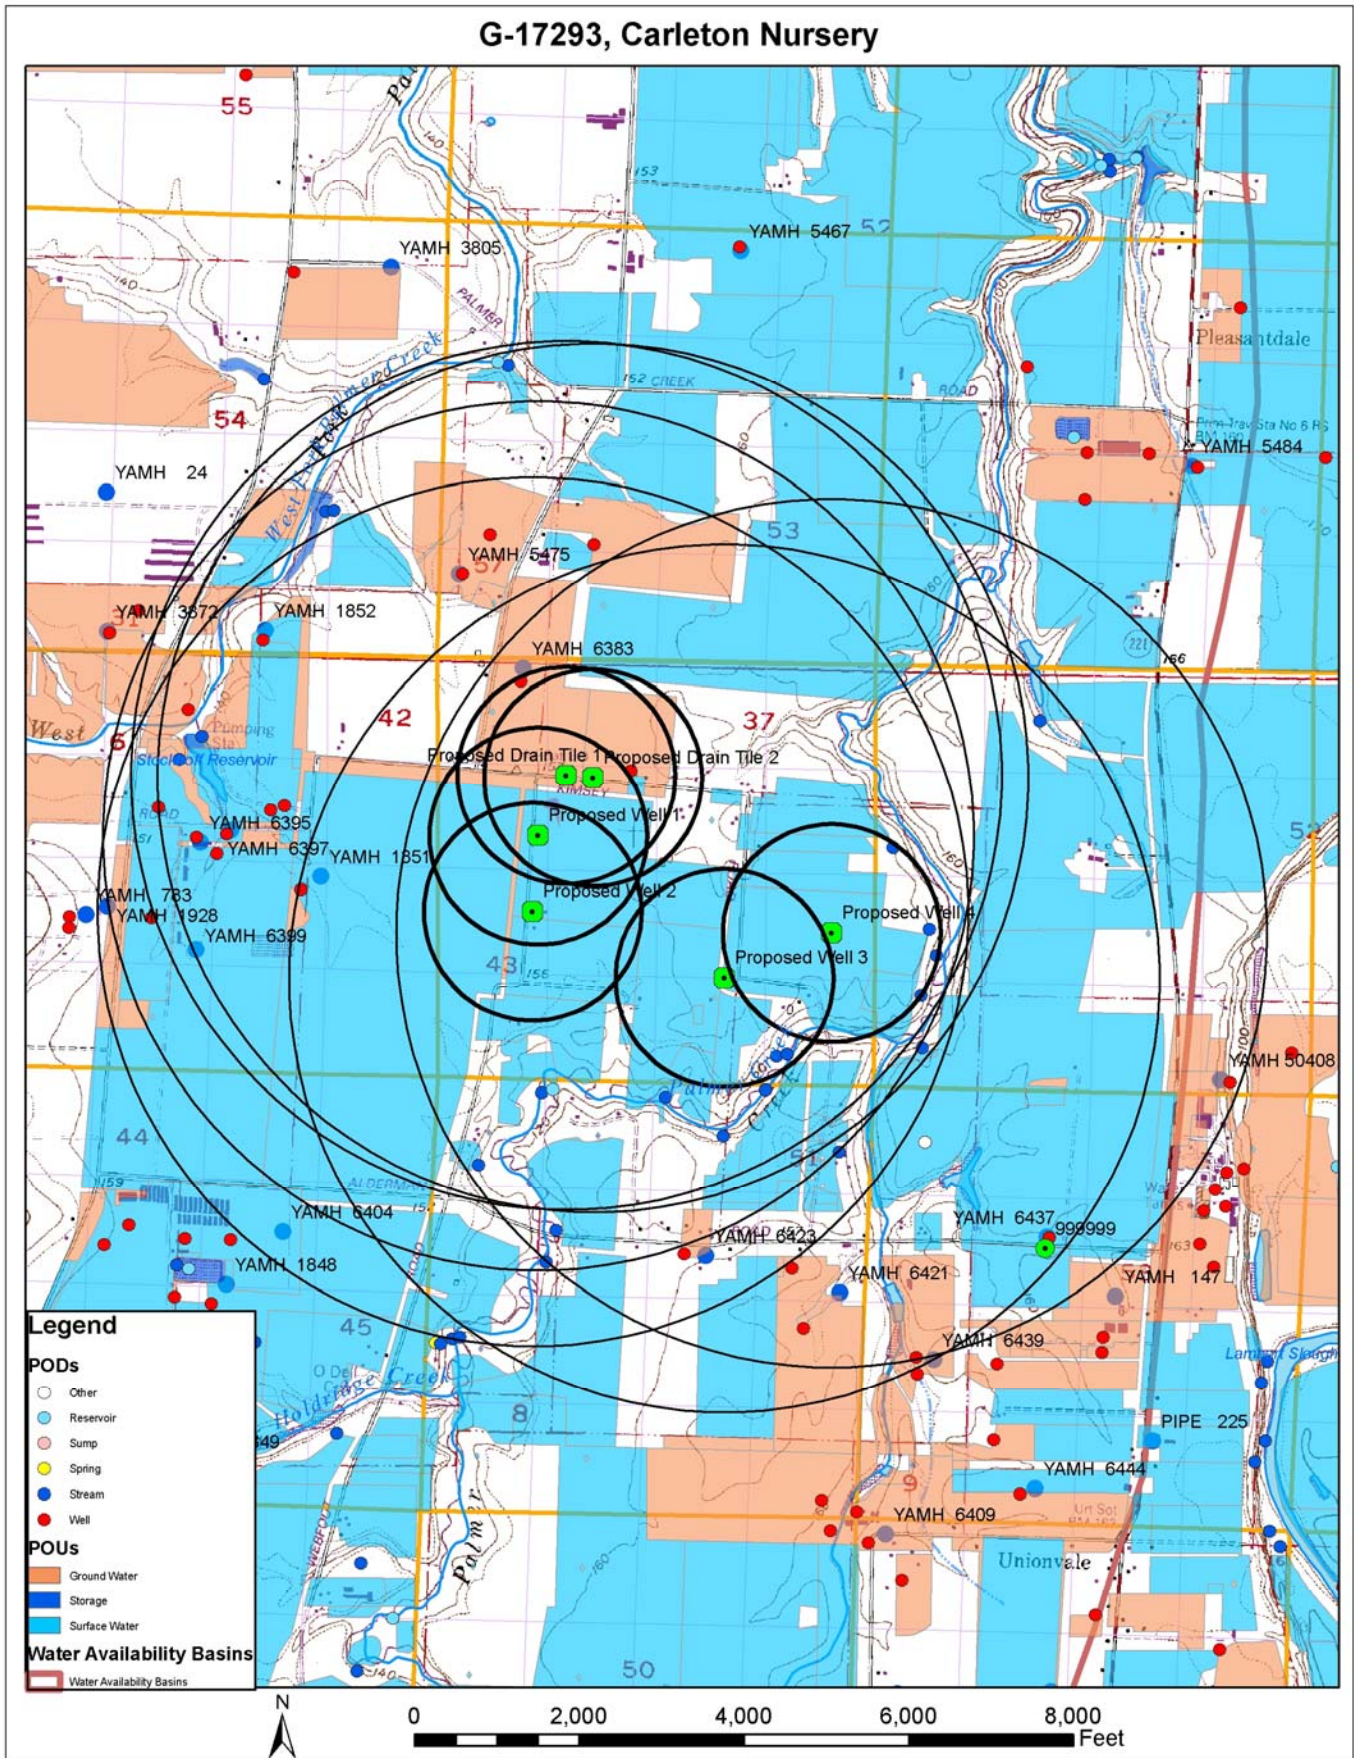

Water Levels in Nearby Wells

