## PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO:		Wate	r Rights Se	ction				Date	Jai	nuary	12, 201	1		
FROM:	:	Grou	ndwater Se	ction	Marc No									
SUBJE	CT:	Appli	ication G	17437			ewer's Nam persedes		view of			Date of Rev	view(s)	
OAR 69 welfare, to determ	<b>90-310-1</b> 3 safety an mine whe	<b>30 (1)</b> <i>ind heal</i> ether th	<i>th as descri</i> e presumpti	nent shall p bed in ORS on is establ	resume that 537.525. D ished. OAR	t a propos epartment . 690-310-	red groun t staff rev 140 allov	iew vs tł	ater use will groundwate ne proposed agency poli	er applica use be m	ne pres utions u	ervation of the or condition of the or conditi	of the put R 690-31 itioned to	10-140 meet
A. <u>GEN</u>	NERAL	INFO	<u>PRMATIO</u>	<u>N</u> : A	pplicant's N	Vame:	Jennifer	& I	Eric Miller		_ (	County:	Wasco	
A1.									Columbia					
A2.	Propose	d use_		gation – 5.4	45 acres	Seas	sonality:		nd Map: Du	rough (	Octobe	r 31		
A3.	Well an	d aquif	er data (atta Applicant's	,		Prop		mar	Location			tion, mete		nds a a
Well	Logid		Well #	Propos	ed Aquifer*	Rate	(cfs)		(T/R-S QQ-	-Q)	2250	' N, 1200'	E fr NW	cor S 36
2	WASC 3		1 2		CRBG CRBG	0.0			02S/13E-18 SI 02S/13E-18 SI		1275' N, 500' W fr SE cor S 18 1275' N, 1000' W fr SE cor S 18			
3 4														
5 * Alluvin	ım, CRB,	Bedroc	k											
Well 1 2	Well Elev ft msl 2140 2160	First Water ft bls 145	SWL ft bls	SWL Date 6/13/79	Well Depth (ft) 215 320	Seal Interval (ft) 0 - 25	Casing Interval (ft) 0 – 85		Liner Intervals (ft)	Perfora Or Scr (ft)	eens	Well Yield (gpm) 5	Draw Down (ft)	Test Type Air
Use data	from appl	lication	for proposed	wells.										
A4.	Also, the two well propose	e prop l logs a ed PO	osed irriga as example	ted area co of how the ea, the hyd	vers land r proposed v lrogeology	not owned well will b can chan	l by the a pe constr ge rapidl	ppl ucte y. [	ax account r icant (see m d. Both we The propose	nap in fil lls are a ed well is	e). Th t least s deepe	e applica two mile er and co	ant subn s from tl	nitted he
	Reques	ted dis	charge rate	is 10 gpm	= 0.022 cfs									
A5. 🗌		basin 1	ules contair	such provi	isions.)				les relative to			ent, class ated by th	ification is applic	and/or ation.
A6. 🗌	Well(s) Name of	# f admir nts: <u>N</u>	nistrative are	ea: ,	,	,	,	tap	(s) an aquife	er limited	by an	administ	rative res	striction.

Version: 08/15/2003

## B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

a.	is over appropriated, is not over appropriated, or is cannot be determined to be over appropriated during any period of the proposed use. * This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
b.	□ will not <i>or</i> □ will likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
c.	$\square$ will not or $\square$ will likely to be available within the capacity of the groundwater resource; or
d.	<ul> <li>will, if properly conditioned, avoid injury to existing groundwater rights or to the groundwater resource:         <ol> <li>i. </li> <li>The permit should contain condition #(s)</li> <li>Well #1 &amp; #2 7B - Interference, 7N - Annual WL</li> <li>(February/March), 7P - Well Tag, Large measuring and reporting with flow meter on each well;</li> <li>ii. </li> <li>The permit should be conditioned as indicated in item 2 below.</li> <li>The permit should contain special condition(s) as indicated in item 3 below;</li> </ol> </li> </ul>
a.	Condition to allow groundwater production from no deeper than ft. below land surface;
b.	Condition to allow groundwater production from no shallower than ft. below land surface;
c.	Condition to allow groundwater production only from the groundwater reservoir between approximately ft. and ft. below land surface;
d.	☐ Condition to allow production only from a single aquifer in the Columbia River Basalt groundwater reservoir;
e.	■ <b>Well reconstruction</b> is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.
	<b>Describe injury</b> —as related to water availability— that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc):
Jan on 6 the leve	bundwater availability remarks: A water level was measured at well #1 (WASC 3975) on January 10, 2011. The muary water level was lower than the water level reported on the well log by about 8 feet. The water level was 101 6/13/1979. The amount of decline is probably greater than 8 feet when corrected for the difference in seasons of measurements. A well, WASC 1950, located about two miles northeast was recently deepened because the water el had declined about 49 feet in from 8/16/1991 to 8/23/2010. When deepened, the well penetrated a deeper aquifer ha water level about 50 feet lower. See Graph. WASC 3975 develops water from a different aquifer that WASC 10.
Jan on 6 the leve with 195	have level was lower than the water level reported on the well log by about 8 feet. The water level was 101 6/13/1979. The amount of decline is probably greater than 8 feet when corrected for the difference in seasons of measurements. A well, WASC 1950, located about two miles northeast was recently deepened because the water el had declined about 49 feet in from 8/16/1991 to 8/23/2010. When deepened, the well penetrated a deeper aquifer has water level about 50 feet lower. See Graph. WASC 3975 develops water from a different aquifer that WASC 10.
Jan on 6 the leve with 195 The It is dec	huary water level was lower than the water level reported on the well log by about 8 feet. The water level was 101 6/13/1979. The amount of decline is probably greater than 8 feet when corrected for the difference in seasons of measurements. A well, WASC 1950, located about two miles northeast was recently deepened because the water el had declined about 49 feet in from 8/16/1991 to 8/23/2010. When deepened, the well penetrated a deeper aquifer had water level about 50 feet lower. See Graph. WASC 3975 develops water from a different aquifer that WASC 0.  The applicant has requested a second POD with a proposed depth of 320 feet, 105 feet deeper than the existing well. It is not unusual for wells to encounter different aquifers with increasing depth in this area. There are substantial lines in some aquifers in this area. If a new well is constructed or the existing well is deepened, a different aquifer by be encountered. There is a well under construction about ½ mile south of the applicants (as of early February).
Jan on ( the leve with 195 The It is deci	huary water level was lower than the water level reported on the well log by about 8 feet. The water level was 101 6/13/1979. The amount of decline is probably greater than 8 feet when corrected for the difference in seasons of measurements. A well, WASC 1950, located about two miles northeast was recently deepened because the water el had declined about 49 feet in from 8/16/1991 to 8/23/2010. When deepened, the well penetrated a deeper aquifer ha water level about 50 feet lower. See Graph. WASC 3975 develops water from a different aquifer that WASC 0.  The applicant has requested a second POD with a proposed depth of 320 feet, 105 feet deeper than the existing well. It is not unusual for wells to encounter different aquifers with increasing depth in this area. There are substantial lines in some aquifers in this area. If a new well is constructed or the existing well is deepened, a different aquifer

2

## C. GROUND WATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. **690-09-040 (1):** Evaluation of aquifer confinement:

Wel 1	Aquifer or Proposed Aquifer	Confined	Unconfined
1	CRBG	$\boxtimes$	
2	CRBG	$\boxtimes$	

Basis for aquifer confinement evaluation:	At WASC 3975, the groundwater level rose above where it was encountered
during drilling; therefore, the aquifer was	confined in 1979 when the well was constructed.

C2. **690-09-040** (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ½ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected? YES NO ASSUMED	Potential for Subst. Interfer. Assumed? YES NO
1	1	Larch & Rail Hollow creeks					
2	1	Larch & Rail Hollow creeks					

Basis for aquifer hydraulic connection evaluation:	All of the streams within one mile of the proposed development are
intermittent. Groundwater levels and the elevation	n of the aquifer are above nearby streams but the streams do not flow
during most of the year.	·

Water Availability Basin the well(s) are located within:	

C3a. **690-09-040** (4): Evaluation of stream impacts for <u>each well</u> that has been determined or assumed to be **hydraulically** connected and less than 1 mile from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% *natural* flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked  $\boxtimes$  box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < 1/4 mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

SW #		Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
Comments: _	NA								

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

	istributed												
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well (	Q as CFS												
Interfer	ence CFS												
Dietrik	outed Well	lc											
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well (	Q as CFS												
	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well (	Q as CFS												
Interfer	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well (	Q as CFS												
Interfer	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
	Q as CFS												
Interfer	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
	Q as CFS												
Interfer	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
	Q as CFS												
Interfer	rence CFS												
$(\mathbf{A}) = \mathbf{T}\mathbf{c}$	otal Interf.												
	% Nat. Q												
	% Nat. Q												
( <b>D</b> ) =	(A) > (C)	<b>√</b>											
	/B) x 100	%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

5

	Basis for impact evaluation:
4b.	690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Warights Section.
5. [	☐ If properly conditioned, the surface water source(s) can be adequately protected from interference, and/or groundwater under this permit can be regulated if it is found to substantially interfere with surface water:  i. ☐ The permit should contain condition #(s)  ii. ☐ The permit should contain special condition(s) as indicated in "Remarks" below;
	ii. iii The permit should contain special condition(s) as indicated in Remarks below;
- 0	
b. S	W / GW Remarks and Conditions
_	
-	
_	
_	
_	
_	
_	
_	
_	
_	
_	
_	
_	
_	
_	
_	
F	References Used:
•	
_	
_	
_	

Date: January 12, 2011


Page

6


Application G-17437

## D. WELL CONSTRUCTION, OAR 690-200

D1.	W	ell #: Logid:
D2.	a. b. c. d.	HE WELL does not meet current well construction standards based upon:  review of the well log; field inspection by report of CWRE other: (specify)
D3.	a. b. c. d. e.	HE WELL construction deficiency:  constitutes a health threat under Division 200 rules;  commingles water from more than one groundwater reservoir;  permits the loss of artesian head;  permits the de-watering of one or more groundwater reservoirs;  other: (specify)
D4.	T	HE WELL construction deficiency is described as follows:
D5.	□ R	AE WELL  a. □ was, or □ was not constructed according to the standards in effect at the time of original construction or most recent modification.  b. □ I don't know if it met standards at the time of construction.  oute to the Enforcement Section. I recommend withholding issuance of the permit until evidence of well reconstruction filed with the Department and approved by the Enforcement Section and the Groundwater Section.
TH	IS SE	CTION TO BE COMPLETED BY ENFORCEMENT PERSONNEL
D7.		ell construction deficiency has been corrected by the following actions:
	_	(Enforcement Section Signature)
D8.	∐ R	oute to Water Rights Section (attach well reconstruction logs to this page).

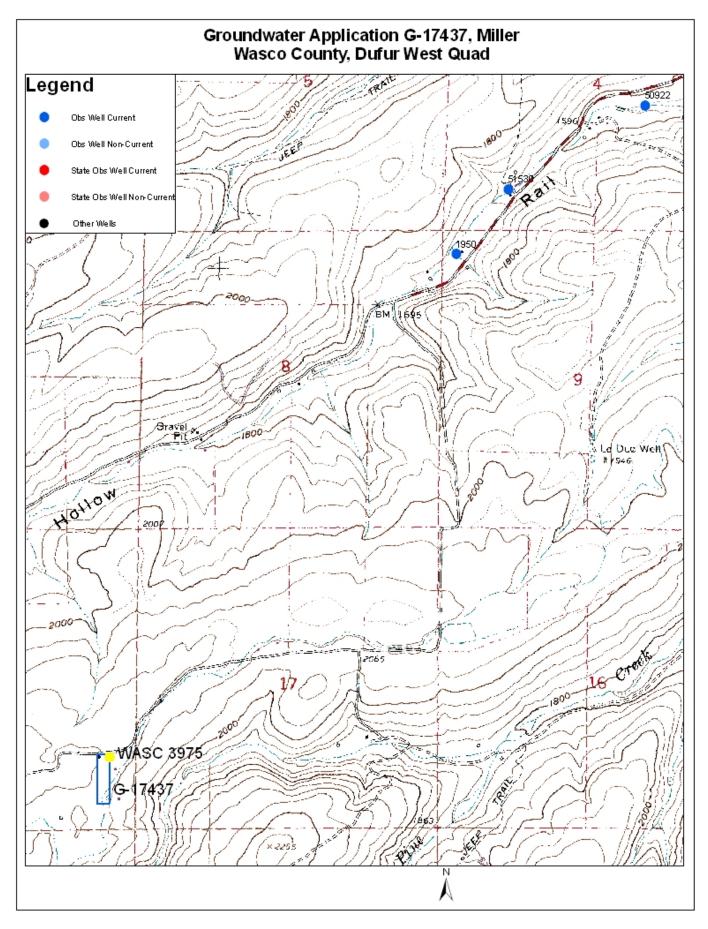

. -----

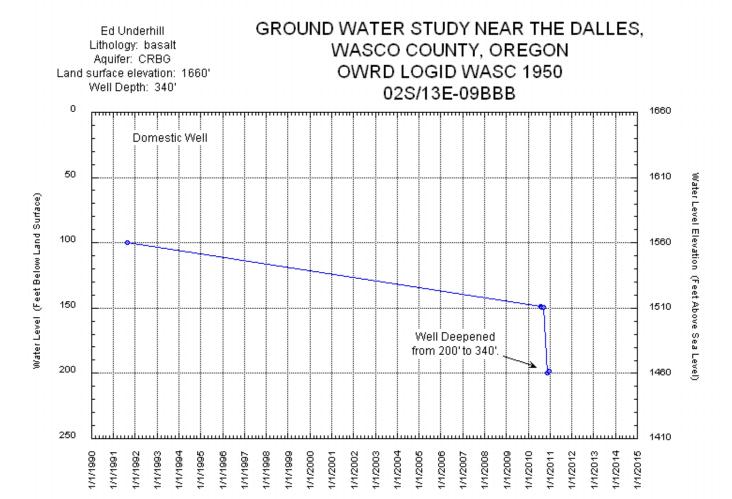

9