Water Right Conditions Tracking Slip Groundwater/Hydrology Section FILE # # ___ G - 1779 6 ROUTED TO: ___ WATER RIGHTS TOWNSHIP/ RANGE-SECTION: __ IN/21E-32 CONDITIONS ATTACHED?: [Vyes [] no REMARKS OR FURTHER INSTRUCTIONS: _____ See _ conditions on p 2. Reviewer: __ Marc Norton

WATER RESOURCES DEPARTMENT April 7 ,200 14 **MEMO** Application G- 17796 TO: GW: Marc Norton (Reviewer's Name) FROM: SUBJECT: Scenic Waterway Interference Evaluation YES The source of appropriation is within or above a Scenic Waterway YES Use the Scenic Waterway condition (Condition 7J) Per ORS 390.835, the Ground Water Section is able to calculate ground water interference with surface water that contributes to a Scenic Waterway. The calculated interference is distributed below. Per ORS 390.835, the Ground Water Section is unable to calculate ground water interference with surface water that contributes to a scenic waterway; therefore, the Department is unable to find that there is a preponderance of evidence that the proposed use will measurably reduce the surface water flows necessary to maintain the free-flowing character of a scenic waterway. DISTRIBUTION OF INTERFERENCE Calculate the percentage of consumptive use by month and fill in the table below. If interference cannot be calculated, per criteria in 390.835, do not fill in the table but check the "unable" option above, thus informing Water Rights that the Department is unable to make a Preponderance of Evidence finding. Exercise of this permit is calculated to reduce monthly flows in Scenic Waterway by the following amounts expressed as a proportion of the consumptive use by which surface water flow is reduced. Jan Oct Nov Dec Feb Mar Apr May Jun Jul Aug Sep

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO:		Wate	r Rights Sec	tion				Dat	e Ap	<u>ril 7, 2</u>	2014		
FROM	:	Grou	ndwater Sec	tion			Norton						
SUBJE	CT:	Appl	ication G	17796			ewer's Name bersedes	review of		****	Date of Rev	view(s)	
oar 69 welfare, to determ the press	90-310-13 safety ar mine whe umption	30 (1) and hea ether the	<i>lth as describ</i> ne presumptio	ent shall p ed in ORS n is establi v is based	resume that 537.525. D ished. OAR upon avail	a propose epartment 690-310- able infor	ed ground staff revi 140 allow mation a	water use will ew ground water the proposed nd agency pol Wilkins	er applica use be me icies in pl	tions todified	ınder OA l or condi	R 690-31 tioned to of evalu	10-140 meet nation.
A1.	Applica	nt(s) s	eek(s) 1.84	cfs from	m <u>1</u>	well(s) in the _	John Day l	River				_Basin,
	F	Rock C	Creek Basin			subba	asin (Quad Map: S	hutler Fla	t			
A2. A3.	Propose Well an	d use_ d aqui	Irrigation fer data (atta	(24.9 P & ch and nu	85.3 S) mber logs f	Seas	onality: _ g wells; r	3/1 – 10/3 nark proposed	l wells as	such 1	ınder log	gid):	
Well	Logid	i	Applicant's Well #	Propos	ed Aquifer*	Propo Rate		Location (T/R-S QQ			tion, mete ' N, 1200'		
1 2	PROPOS	SED	1	-	CRBG	1.8		01N/21E-32S		207	75' S, 3870'	EfNW co	or S 32
3 4													
5	ım, CRB,	D - d	1-										
* Alluvit									1				
Well	Well Elev ft msl 860	First Wate ft bl:	r SWL	SWL Date	Well Depth (ft) 600	Seal Interval (ft)	Casing Interval (ft)		Perfora Or Scr (ft)	eens	Well Yield (gpm)	Draw Down (ft)	Test Type
													·
Use data	from appl	lication	for proposed v	vells.	<u> </u>				1		l		
A4.						salt Group		ormation. Wel			•		
	Reques	ted di	scharge rate	is 824.3 g	pm = 1.84 c								
A5. 🗌	manage (Not all	ment o	of groundwate rules contain	r hydrauli such provi	cally connerisions.)	cted to sur	face wate	rules relative	are not	, activa	ated by th	is applica	ation.
A6. 🗌	Name o Comme	f admi	nistrative are	a: <u>NA</u>				tap(s) an aquif					

2

B. GROUND WATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

Bas	sed upon available data, I have determined that groundwater* for the proposed use:
a.	is over appropriated, ☐ is not over appropriated, or ☒ cannot be determined to be over appropriated during any period of the proposed use. * This finding is limited to the ground water portion of the over-appropriation determination as prescribed in OAR 690-310-130;
b.	will not or will likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the ground water portion of the injury determination as prescribed in OAR 690-310-130;
c.	will not or will likely to be available within the capacity of the groundwater resource; or
d.	 will, if properly conditioned, avoid injury to existing groundwater rights or to the groundwater resource: i. The permit should contain condition #(s) 7N - Annual WL (February/March), 7T - Measuring Tube, Large measuring and reporting with flow meter on each well ii. The permit should be conditioned as indicated in item 2 below. iii. The permit should contain special condition(s) as indicated in item 3 below;
a.	Condition to allow groundwater production from no deeper than ft. below land surface;
b.	Condition to allow groundwater production from no shallower than ft. below land surface;
c.	Condition to allow groundwater production only from the groundwater reservoir between approximately ft. and ft. below land surface;
d.	Condition to allow production only from a single aquifer in the Columbia River Basalt groundwater reservoir;
e.	Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Ground Water Section.
	Describe injury -as related to water availability- that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc):

River Basalt Group (CRBG) has resulted in significant water level declines. The declines are the result of poor well construction and over development of the resource. Past well construction practices allowed commingling of water from different aquifers, often allowing water to move up or down the open borehole. These practices drained upper aquifers and reduced artesian pressure in deeper aquifers. Aquifers within the CRBG generally yield large quantities of water when pumped. Storage of water within the basalt aquifers is very limited and recharge is minimal. The combination of large discharge rates with limited storage and recharge results in over-development and groundwater level declines. As a result, additional conditions are listed below:

To prevent interference with Rock Creek, the well shall be continuously cased and continuously sealed to a minimum depth of 150 feet below land surface. Groundwater production in the well shall be limited to a single aquifer in the Columbia River Basalt Group. The well shall be continuously cased and continuously sealed to within 100 feet of the bottom of the open borehole. A larger open interval may be approved by the Department if the permittee can demonstrate to the Department's satisfaction, using packer tests or other suitable methods, that the hydraulic heads of water-bearing zones in the proposed open interval are equivalent or that the open interval is part of a continuous zone of interconnected porous materials. Following well completion, the wells shall be thoroughly developed to remove cuttings and drilling fluids. A video log of the well shall be collected to demonstrate to the satisfaction of the Department that the well is only open to a single aquifer.

Date: April 7, 2014

tube, separate from other methods of measuring the water level such as airlines or transducers.	The annual water-
level measurement required in the permit shall be measured through the measuring tube.	

Drill cuttings shall be collected at the permitted wells and any test holes. Samples shall be collected at ten-foot intervals and at changes in lithology.

All hydrologic, geologic, geochemical and video data collected shall be provided to OWRD in report and in electronic format specified by the Department.

C. GROUND WATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. **690-09-040** (1): Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	CRBG		

Basis for aquifer confinement evaluation: Wells developing water from an aquifer within the CRBG generally encounter confined conditions.

C2. 690-09-040 (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than 1/4 mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected? YES NO ASSUMED	Potential for Subst. Interfer. Assumed? YES NO
1	1	Rock Creek	820	855	500		

Basis for aquifer hydraulic connection evaluation: Proposed minimum well construction will greatly minimize possible interference with Rock Creek.

Water Availability Basin the well(s) are located within: Rock Creek > John Day River - at mouth

C3a. 690-09-040 (4): Evaluation of stream impacts for each well that has been determined or assumed to be hydraulically connected and less than 1 mile from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% natural flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < 1/4 mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?

Version: 07/26/2013

C3b. 690-09-040 (4): Evaluation of stream impacts by total appropriation for all wells determined or assumed to be hydraulically connected and less than 1 mile from a surface water source. Complete only if Q is distributed among wells. Otherwise same evaluation and limitations apply as in C3a above.

SW #	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
Comments: NA								

C4a. 690-09-040 (5): Estimated impacts on hydraulically connected surface water sources greater than one mile as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use

additional sheets if calculated flows from more than one WAB are required.

	stributed												
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	
	as CFS												
Interfere	ence CFS												
Distrik.	uted Well	_											
Well	SW#	s Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
77 611	5111	- Jun	%	%	%	wiay	3dil %	%	Aug %	<u>зер</u> %	%	740V	9
Well O	as CFS	76	76	70	76	76	76	76	- 70	76		76	
	nce CFS												
Interrere	ince CI 5	%	%		%	%	%	%	%	%	%	%	9
Well O	as CFS	76		70	76	76	70		76	76	- 76	70	
	ence CFS												
Intertete	ille CI's	%	%	%		~	%	~			~	~	
Wall O	as CFS	90	- %	%	%	%	96	%	%	%	%	%	9
	ence CFS												
Interiese	ilice CF3	- %	%	%	%	%	%	%	%	%	%	%	9/
Wall O	as CFS	70		- %	%	%	96	- %			%	%	9
	ence CFS												
Interiere	ilee CI 3	%	%	%		%	67	~	~	%			9
Wall O	as CFS	%	%	%	%	%	%	%	%	%	%	%	
	nce CFS												
mericie	nec Cr5	%	%	%	%	%	%	%	%	%	67	67	
Well O	as CFS	70	76	70	7/0	%	70	70	%		%	%	9
	nce CFS												
THEFTE	aice CF3												
(A) = To1	tal Interf.												
(B) = 80	% Nat. Q												
	% Nat. Q												
(D) = (.	A) > (C)												
	B) x 100	%		%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

	mpact evaluation:						
	40 (5) (b) The position.	otential to impai	r or detriment	ally affect the p	ublic interest i	s to be determine	d by the W
under th	rly conditioned, the spermit can be reg	gulated if it is four	nd to substantia	ally interfere with	surface water:	_	oundwater
ii.	The permit sho The permit sho	uld contain specia	al condition(s)	as indicated in "	Remarks" below	v;	
	emarks and Condi with Rock Creek.		ell constructio	n conditions lis	ted above will	greatly minimize	possible
			ell constructio	n conditions lis	ted above will s	greatly minimize	possible
			ell constructio	n conditions lis	ted above will s	greatly minimize	possible
			ell constructio	n conditions lis	ted above will	greatly minimize	possible
			ell constructio	n conditions lis	ted above will s	greatly minimize	possible
			ell constructio	n conditions lis	ted above will	greatly minimize	possible
			ell constructio	n conditions lis	ted above will	greatly minimize	possible
			ell constructio	on conditions lis	ted above will	greatly minimize	possible
			ell constructio	n conditions lis	ted above will	greatly minimize	possible
			ell constructio	on conditions lis	ted above will	greatly minimize	possible
			ell constructio	n conditions lis	ted above will	greatly minimize	possible
			ell constructio	on conditions lis	ted above will	greatly minimize	possible
			ell constructio	n conditions lis	ted above will	greatly minimize	possible
			ell constructio	on conditions lis	ted above will	greatly minimize	possible
			ell constructio	n conditions lis	ted above will	greatly minimize	possible
			ell constructio	on conditions lis		greatly minimize	possible
nterference	with Rock Creek.		ell constructio	on conditions lis		greatly minimize	possible
nterference	with Rock Creek.		ell constructio	on conditions lis		greatly minimize	possible
	with Rock Creek.		ell constructio	on conditions lis		greatly minimize	possible

Application G-17796

5

Page


Date: April 7, 2014

Date: April 7, 2014

D. WELL CONSTRUCTION, OAR 690-200

D1.	Well #:	Logid:	
02.	a. review of the		on:
	c. report of CW	on byRE	
	d. Other: (specif	y)	
03.		ction deficiency or other comment is described as follows:	
	1		
	40.		
D4. [Route to the Well Co	Instruction and Compliance Section for a review of existing we	ell construction.

Water Availability Tables

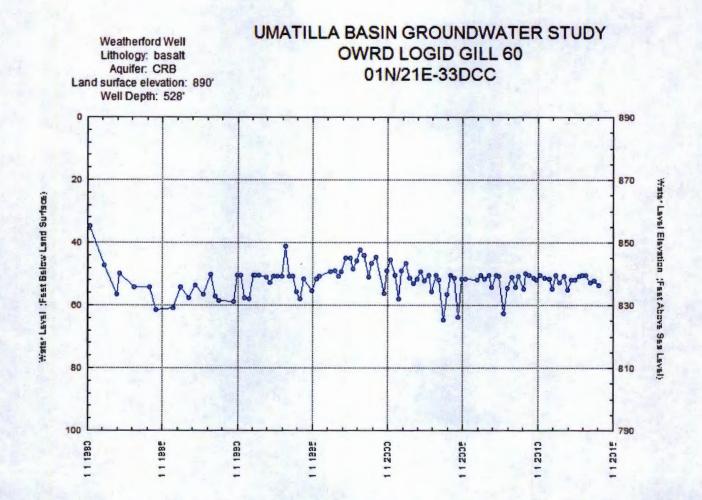

7

Groundwater Application G-17796, Wilkins Gilliam County, Schutler Flat Quad

