
TO:		Applicat	ion G	17949	•								
FROM	:	MikeT	homa /	Jen W	body	- Groun	dwater	Section					
SUBJE	CT:	Scenic Waterway Interference Evaluation											
×	YES	Т	he sourc	e of app	ropriatio	n is with	in or abo	ove a Sco	enic Wa	terway			
<u> </u>	YES	U	se the So	cenic Wa	aterway (conditio	n (condit	ion 7J)					
	with s	RS 390.83 ourface was	ter that c	ontribut				_					
	interfe Depart use wi	RS 390.83 rence with ment is un ill measura ter of a sc	n surface nable to t ably redu	water the find that ce the su	nat contri	ibutes to a prepor	a scenic derance	waterwoof evide	ay; there	fore, the	osed		
Calcula If interfo "unable	te inter erence c " optio	ON OF IN ference as cannot be c on above, th of Evidence	the month calculated us inforn	aly fraction l, per crit aing the V	on of the teria in 39	90.839, d	o not fill i	in the tab	le but ch	eck the			
Waterv	vay by	is permit i the follow the well.							ual cons		cenic		
Monthl Jan	y Fracti Feb	on of Anni Mar	ual Consu Apr	mptive (May	Jse Jun	Jul	Aug	Sep	Oct	Nov	Dec		

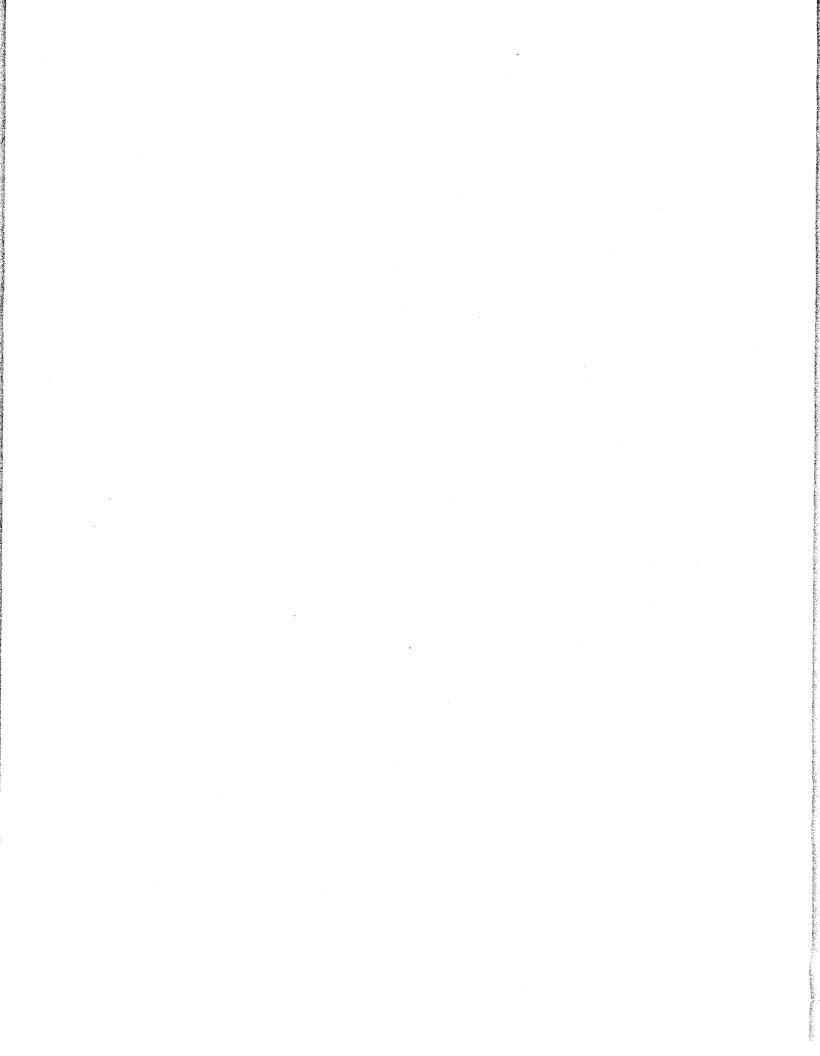

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS TO: Date 11/14/2014 Water Rights Section Groundwater Section Mike Thoma / Jen Woody FROM: Reviewer's Name SUBJECT: Application G- 17949 Supersedes review of_____ Date of Review(s) PUBLIC INTEREST PRESUMPTION: GROUNDWATER OAR 690-310-130 (1) The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525. Department staff review groundwater applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. This review is based upon available information and agency policies in place at the time of evaluation. Applicant's Name: Norton L. Smith County: Jackson A. GENERAL INFORMATION: Applicant(s) seek(s) 0.022 cfs from 1 well(s) in the Applegate River A1. Basin, Middle Applegate River subbasin Quad Map: Ruch

A2. A3.	Proposed use Well and aqui				May 1 - Oct. 31 mark proposed wells a	s such under logid):
Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	**	1	Bedrock	0.022	39S/03W-04 SW-SW	530ft N, 110ft E fr SW cor of S 04
2						
3						
4						
5						

^{*} Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	1960	??	15	??	80	??	??			13		
					L							

Use data from application for proposed wells.

Comments: **No well log can be located for the proposed well. Data in A3 is based on information provided on the application. Special well construction standards accompany this application – see Section D Provisions of the Applegate River (OAR 690-515-0030) Basin rules relative to the development, classification and/or
Provisions of the Applegate River (OAR 690-515-0030) Basin rules relative to the development classification and/or
management of groundwater hydraulically connected to surface water are, or are not, activated by this application. (Not all basin rules contain such provisions.) Comments: OAR 690-515-0030 apply only to surface water
Well(s) #,,, tap(s) an aquifer limited by an administrative restriction. Name of administrative area: Comments:
r ((()

Version: 08/01/2014

B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

a.	ed upon available data, I have determined that groundwater* for the proposed use:
a.	is over appropriated, is not over appropriated, or is cannot be determined to be over appropriated during any period of the proposed use. * This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
b.	□ will not or ☑ will likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
c.	☐ will not or ☒ will likely to be available within the capacity of the groundwater resource; or
d.	will, if properly conditioned, avoid injury to existing groundwater rights or to the groundwater resource: i. The permit should contain condition #(s) 7E (reference level) ii. The permit should be conditioned as indicated in item 2 below. iii. The permit should contain special condition(s) as indicated in item 3 below;
a.	Condition to allow groundwater production from no deeper than 100 ft. below land surface;
b.	Condition to allow groundwater production from no shallower than ft. below land surface;
c.	Condition to allow groundwater production only from the groundwater reservoir between approximately ft. and ft. below land surface;
d.	 Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section. Describe injury —as related to water availability—that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc):
clas may the this yiel	bundwater availability remarks: The proposed land is on a hillslope underlain by dense, low-yielding bedrock sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not ur except where well density is high, which it is not near the applicant's well.
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not
clas may the this yiel	sified into the Western Hayfork Terrain by Donato (1995). Groundwater in this material occurs within fracture zones that be solitary or of limited areal extent. Wells completed in this area and material, several of which can be found < 1 mi to north of the applicant's site, range in depth from 10s to 100s of feet and generally yield < 10 gpm. Limited production of and similar, fractured aquifers in the region lead to conditions where water availability is limited by the well yields; ds are not high enough to cause significant long-term drawdown and interference with other wells typically does not

3

C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. 690-09-040 (1): Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Bedrock*		\boxtimes

Basis for aquifer confinement evaluation: With no well log it is difficult to determine confined/unconfined conditions. Well logs from nearby wells indicated SWL depths significantly above depths of water bearing zones (representative of confined aquifers), but these wells are mostly > 200 ft deep. Shallower wells would likely encounter less confined conditions and some nearby well logs, specifically JACK 18295 and JACK 18285 (125 and 110 ft deep, respectively) indicate unconfined conditions. For the purpose of this application the well will be treated as unconfined.

C2. 690-09-040 (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than 1/4 mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected? YES NO ASSUMED	Potential for Subst. Interfer. Assumed? YES NO
1	1	Unnamed stream in Rock Gulch	1945	1600-2600	1700		

Basis for aquifer hydraulic connection evaluation: The applicant's well likely produces from fractures within the bedrock aquifer which are of limited extent and where conditions are not favorable to rapid or extensive expansion of the cone of depression (hence low well yields). Additionally, head in the well (according to information provided in the application – see A3) does not match surface water elevations within a distance where the cone of depression will intersect the stream.

Water Availability Basin the well(s) are located within: Applegate R > Rogue R-AB Joe G (Watershed ID # 250)

C3a. 690-09-040 (4): Evaluation of stream impacts for each well that has been determined or assumed to be hydraulically connected and less than 1 mile from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% natural flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < 1/4 mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?

C3b. 690-09-040 (4): Evaluation of stream impacts by total appropriation for all wells determined or assumed to be hydraulically connected and less than 1 mile from a surface water source. Complete only if Q is distributed among wells. Otherwise same evaluation and limitations apply as in C3a above.

SW #	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?

Comments: The well was determined not to be hydraulically connected to surface water

C4a. 690-09-040 (5): Estimated impacts on hydraulically connected surface water sources greater than one mile as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-D	istributed	Wells											
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well (Q as CFS												
Interfer	ence CFS		-										
D: 4 :1	outed Well		ating the of the	1K WES	5 A 1	, Panylon)_r_\:\\;\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		(A-71) () ()	A SE SE ME LE L	ile in fluorigide	(100) 1 (100)	
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
WCII	31111	%	%	%	71p1 %	way %	%	%	%	% %	%	%	%
Well (Q as CFS	70	70	70	70	70	70	70	70	~	70	70	70
	rence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well (Q as CFS	~		- ~	- ~	~	~~~~						
	rence CFS												
Titterre.		%	%	%	%	%	%	%	%	%	%	%	%
Well (Q as CFS	- ~		~		- ~							
	rence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well	Q as CFS												
	rence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well	Q as CFS										-		
	rence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well	Q as CFS												
Interfe	rence CFS												
(A)	Sylbox II	FW 40 1 (10 10 10 10 10 10 10 10 10 10 10 10 10 1		481,512519036191	I	\$11.13 WAYS	90450 (m// St.)	7 (13) (4) BY (3) (Hea)		WAR LINE	19.79(.19.7)		. 374174
	otal Interf.				ļ								
	0 % Nat. Q												
(C) = 1	% Nat. Q												
(D) =	(A) > (C)		/		7		1		V	-	V	V	
	/B) x 100	%	%	%	%	%	%	%	%	%	%	%	%
(E) = (A	/B) x 100	%	%	%	%	%	%	%	%	%	%	%	%

	mark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentaguation:
·	
690-09-040 (5) (b) Rights Section.	The potential to impair or detrimentally affect the public interest is to be determined by the
under this permit car	oned, the surface water source(s) can be adequately protected from interference, and/or groundwater no be regulated if it is found to substantially interfere with surface water:
ii. The peri	mit should contain condition #(s)
<u></u> _[
W / GW Remarks and	Conditions: The well is not determined to be hydraulically connected to surface water.
References Used: <u>Dona</u> USGS Open-File Report	ato, M. M. 1995. Preliminary geologic map of part of the Ruch quadrangle, Jackson County, Orego OF-95-640.

Application G-

Page

Date:

5

D. WELL CONSTRUCTION, OAR 690-200

Da	THE WELL I
D2.	THE WELL does not appear to meet current well construction standards based upon:
	a. review of the well log;
	b. field inspection by
	c. report of CWRE
	d. other: (specify) no well log can be found for this well
D3.	THE WELL construction deficiency or other comment is described as follows: No well log describing the applicants

D3. THE WELL construction deficiency or other comment is described as follows: No well log describing the applicants well is available. Therefore, the Department cannot determine whether the existing well meets well construction standards. The applicant may either reconstruct the existing well to meet current well construction standards, or choose to drill a replacement well nearby according to conditions specified in Section B2 of this review.

D4. Route to the Well Construction and Compliance Section for a review of existing well construction.

Application Review Map

