

PUBLIC INTEREST REVIEW FOR GROUND WATER APPLICATIONS

TO: Water Rights Section Date 17 June 2015
 FROM: Ground Water/Hydrology Section Gerald H. Grondin
Reviewer's Name
 SUBJECT: Application G- 17968 Supersedes review of _____
Date of Review(s)

PUBLIC INTEREST PRESUMPTION; GROUNDWATER

OAR 690-310-130 (1) *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525. Department staff review ground water applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. This review is based upon available information and agency policies in place at the time of evaluation.*

A. GENERAL INFORMATION: Applicant's Name: Eleanor Fitzgerald, Fitzgerald Ranch Inc. County: Lake

A1. Applicant(s) seek(s) 4.58 cfs (2.056 gpm) cfs from 1 well(s) in the Goose & Summer Lakes Basin, Warner Lakes subbasin Quad Map: Plush

A2. Proposed use: Supplemental Irrigation (366.4 acres) Seasonality: 1 March to 31 October (245 days)

A3. Well and aquifer data (attach and number logs for existing wells; mark proposed wells as such under logid):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	LAKE 52568	Well 1	Basalt	4.58	T36S/R24E-sec 15 bcc	2400' S, 72' W fr NW cor S 15
2						

* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	4475	51	12.5	09/23/14	260	0-65	+2-131	None	91-131	1500	?	Air
2												

Use data from application for proposed wells.

A4. Comments: _____

The application requests a total maximum pumping rate of 4.58 cfs (2.056 gpm) and a total maximum annual volume of 1,099.2 acre-feet from a single well to supplemental irrigate 366.4 acres (3 ac-ft per acre). The maximum pumping rate and maximum annual volume are what is typically allowed for 366.4 acres.

The proposed POA well is the same POA well as proposed for application G-17749 (permit G-17281). The OWRD Groundwater Section review of that application recommended a condition that required production from the predominantly basalt-volcanic unit only for a proposed POA well not yet drilled. Subsequently, well LAKE 52568 was drilled and it meets the condition.

A5. Provisions of the in general OAR 690-513; particularly OAR 690-513-0040 (Warner Lakes sub-basin) Basin rules relative to the development, classification and/or management of ground water hydraulically connected to surface water are, or are not, activated by this application. (Not all basin rules contain such provisions.)
 Comments: _____

A6. Well(s) # N.A., _____, _____, _____, _____, tap(s) an aquifer limited by an administrative restriction.
 Name of administrative area: _____
 Comments: Currently, there is no administrative area.

B. GROUND WATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

B1. **Based upon available data**, I have determined that ground water* for the proposed use:

- a. is over appropriated, is not over appropriated, or **cannot be determined to be** over appropriated during any period of the proposed use. * This finding is limited to the ground water portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b. **will not** or **will** likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the ground water portion of the injury determination as prescribed in OAR 690-310-130;
- c. **will not** or **will** likely to be available within the capacity of the ground water resource; or
- d. **will, if properly conditioned**, avoid injury to existing ground water rights or to the ground water resource:
 - i. The permit should contain condition #(s) 7B, 7F, 7N, 7P, 7T;
 - ii. The permit should be conditioned as indicated in item 2 below.
 - iii. The permit should contain special condition(s) as indicated in item 3 below;

- B2. a. **Condition** to allow ground water production from no deeper than _____ ft. below land surface;
- b. **Condition** to allow ground water production from no shallower than _____ ft. below land surface;
- c. **Condition** to allow ground water production only from the _____ ground water reservoir between approximately _____ ft. and _____ ft. below land surface;
- d. **Well reconstruction** is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Ground Water Section.

Describe injury –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): _____

B3. **Ground water availability remarks:** _____

The state observation well with long term data (early 1960s to 2015) closest to the proposed POA well is state observation well 377 (well LAKE 1886) located in T36S/R24E-sec 33 abb about 2.7 miles south of the proposed POA well. The water level data for the well shows long term climate influences as well as annual seasonal influences. Before the 2000, peak annual groundwater levels were generally between 15 and 17 feet below land surface at the well. After 2001, the peak annual groundwater level has often been from 17 to 19 feet below land surface at the well. Climate may be partly to entirely responsible for the lower annual peak levels after 2001. Ongoing groundwater level measurements will help that determination.

If a permit is issued, the following conditions should be included: 7B, 7F, 7N, 7P, 7T, and

Special Groundwater Reference Level Condition: “The Groundwater Reference Level at proposed the POA well (LAKE 52568) shall be 5.75 feet below land surface based on the 18 march 2015 measurement at that well.”

The “large” water use condition: (require a totalizing flow meter at each well. Each flow meter shall be located within 50 feet of the wellhead and adjacent to each flow meter shall be a clearly visible monument with a sign noting the flow meter. Lastly, require for every flow meter the reading, recording (monthly at minimum), and annual reporting of the flow meter data, all flow meters).

Special Condition for groundwater production: “All POA wells under this permit shall comply with existing well construction standards. Groundwater production shall occur from the predominantly basalt unit below the predominantly basin fill unit by continuous casing and continuous seal through the predominantly basin fill unit and into the predominantly basalt unit.” The proposed POA well (LAKE 52568) meets this condition.

C. GROUND WATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. **690-09-040 (1):** Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Basalt (as required by permit condition)	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>

Basis for aquifer confinement evaluation: _____

Walker (1973) and Walker and Repenning (1965) respectively map the surface geology at the proposed POA well as Qal (unconsolidated fluviatile gravel, sand, and silt) and QTs (lacustrine, fluviatile, and Aeolian sedimentary rocks, interstratified tuff, ashy diatomite and unconsolidated clay, sand, and gravel). Basalt (Tb) is exposed in the uplands to the west of the wells.

The groundwater system is identified as generally unconfined with discontinuous low permeability layers causing local (discontinuous, limited) confinement. Generally, lower transmissivity (lower permeability) sediment (predominantly basin-fill sediment unit) of varying thickness overlies higher transmissivity (higher permeability) basalt (predominantly basalt unit). Groundwater occurs in both the predominantly basin-fill sediment unit and the predominantly basalt unit. Groundwater is vertically connected within each unit and between each unit. This is based upon investigations by Sammel and Craig (1981) for Warner Valley, Morgan (1988) for Goose Lake Valley and Miller (1984 and 1986) for the Fort Rock and Christmas Valley area. Sammel and Craig (1981) particularly note the similarity of the hydrogeology in the Warner lakes Valley to the Klamath Basin.

The predominant basin-fill sediment unit thickness can vary. For example, the depth to the top of the predominantly basalt unit is about 104 feet at well LAKE 1825 located 2.6 miles north of the proposed POA; the depth to the top of the predominantly basalt unit is 75 feet at well LAKE 1839 located about 1.1 miles west of the proposed POA well; the depth to the top of the predominantly basalt unit exceeds 640 feet (below well bottom) at well LAKE 4281 located about 2.7 miles east of the proposed POA well; the depth to the top of the predominantly basalt unit is about 150 feet at well LAKE 1886 located about 2.7 miles south of the proposed POA well; and the depth to the top of the predominantly basalt unit at the proposed POA well (LAKE 52568) is about 50 feet.

C2. **690-09-040 (2) (3):** Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
1	1	Un-named Lakes (ponds)	4470	4470	2900	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
1	2	Hart Lake	4470	4473	6100	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2	3	Honey Creek	4470	4505	11500	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
1	4	Miner's Draw	4470	4515	12300	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
1	5	Anderson Lake	4470	4466	23950	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Basis for aquifer hydraulic connection evaluation: _____

Available reports indicate groundwater and surface water are connected in the Warner Lakes Valley, and groundwater flows from south to north in the valley.

Miners Draw is an intermittent stream that appears to be runoff flow only. Groundwater appears to be below the stream-bed. The un-named lakes, Anderson Lake, and Hart Lake appear to be coincident with groundwater.

The distance to Honey Creek is to the perennial flow portion of the creek. The elevation is for the perennial portion north and west of Plush.

Water Availability Basin the well(s) are located within: HONEY CR > HART L – AT MOUTH

C3a. **690-09-040 (4):** Evaluation of stream impacts for each well that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% *natural* flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < 1/4 mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

SW #	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

Comments: _____

The well is less than 1.0 mile from the un-named lakes. Use of the Hunt analytic model is not appropriate for this case. The Theis equation (Theis, 1935) was used to calculate the groundwater level drawdown at un-named lakes (ponds) using the values below. The calculated drawdowns are shown in the table below. The potential drawdown at the un-named lakes in addition to the potential drawdown allowed by permit G-17281 (file G-17749) may seasonally adversely impact the un-named lakes.

Used full pumping rate = 4.58 cfs (2,056 gpm),

Used pro-rated pumping rate = 2.6 cfs (1,015 gpm),

Used aquifer transmissivity = 8,300 ft²/day based on specific capacity of LAKE 1779, LAKE1825, LAKE 1839, & LAKE 4070. The value is within the range noted by Sammel and Craig (1981)

Used, an intermediate storage coefficient = 0.001

In regards to the other water bodies, the proposed POA is not hydraulically connected to Miners Draw, and it is more than 1.0 mile from the Anderson Lake, Hart Lake, and Honey Creek.

Pumping Scenario	Elapsed Time (days)	Calculated Drawdown (feet)		
		Un-named Lakes		
Continuous Full Rate (4.58 cfs)	30	15.96		
	245	23.90		
Continuous Pro-Rated (2.26 cfs)	30	7.88		
	245	11.80		

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
1	4	0.09%	0.09%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.04%	0.04%	0.04%	0.04%
Well Q as CFS		0.00	0.00	2.26	2.26	2.26	2.26	2.26	2.26	2.26	2.26	0.00	0.00
Interference CFS		0.002	0.002	0.000	0.000	0.000	0.000	0.000	0.000	0.001	0.001	0.001	0.001
(A) = Total Interf.		0.002	0.002	0.000	0.000	0.000	0.000	0.000	0.000	0.001	0.001	0.001	0.001
(B) = 80 % Nat. Q		5.06	6.64	12.6	41.5	53.8	26.8	4.32	2.27	2.07	2.14	3.01	3.74
(C) = 1 % Nat. Q		0.0506	0.0664	0.1260	0.4150	0.5380	0.2680	0.0432	0.0227	0.0207	0.0214	0.0301	0.0374
(D) = (A) > (C)		No	No	No	No	No	No	No	No	No	No	No	No
(E) = (A / B) x 100		0.0395	0.0301	0.000	0.000	0.000	0.000	0.000	0.000	0.0483	0.0467	0.0332	0.0267

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

Basis for impact evaluation: _____

Analysis is done in this section given the proposed POA well is more than 1.0 mile from Honey Creek, Anderson Lake, and Hart Lake.

The Table above was used for interference with Honey Creek only given it is the water body in the area with water availability data.

A pro-rated pumping rate of 2.26 cfs (1,015 gpm) was used for the pumping rate. The pro-rated rate is the maximum annual volume of water allowed (1,099.2 ac-ft) divided the total time (245 days). This distributes the pumping over the entire proposed irrigation season. The results of 0.00% and 0.000 cfs indicate the calculated interference was less than 0.0005 cfs.

Hunt (2003) was used to calculate the interference:

Used pro-rated pumping rate = 2.26 cfs (1,015 gpm),

Used aquifer transmissivity = 8,300 ft²/day based on specific capacity of LAKE 1779, LAKE1825, LAKE 1839, & LAKE 4070. The value is within the range noted by Sammel and Craig (1981)

Used, an intermediate storage coefficient = 0.001

Used, sediment hydraulic conductivity Kv = 1.00 ft/day (based well LAKE 4281)

Used sediment thickness below creek = 150 feet (based on LAKE 1886 near Honey Creek)

Used stream width = 20 feet.

The Theis equation (Theis, 1935) was used to calculate the groundwater level drawdown at Anderson Lake and Hart Lake using the same values above. The calculated drawdowns are shown below. The potential drawdown at the unnamed lakes in addition to the potential drawdown allowed by permit G-17281 (file G-17749) may seasonally adversely impact the lakes.

Pumping Scenario	Elapsed Time (days)	Calculated Drawdown (feet)	
		Anderson Lake	Hart Lake
Continuous Full Rate (4.58 cfs)	30	1.81	10.42
	245	8.13	18.27
Continuous Pro-Rated (2.26 cfs)	30	0.89	5.15
	245	4.02	9.02

C4b. **690-09-040 (5) (b)** The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.

C5. **If properly conditioned**, the surface water source(s) can be adequately protected from interference, and/or ground water use under this permit can be regulated if it is found to substantially interfere with surface water:

- i. The permit should contain condition #(s) 7B, 7F, 7N, 7P, 7T, and other (see below);
- ii. The permit should contain special condition(s) as indicated in "Remarks" below;

C6. SW / GW Remarks and Conditions _____

If a permit is issued, the following conditions should be included: 7B, 7F, 7N, 7P, 7T, and

Special Groundwater Reference Level Condition: "The Groundwater Reference Level at proposed the POA well (LAKE 52568) shall be 5.75 feet below land surface based on the 18 march 2015 measurement at that well."

The "large" water use condition: (require a totalizing flow meter at each well. Each flow meter shall be located within 50 feet of the wellhead and adjacent to each flow meter shall be a clearly visible monument with a sign noting the flow meter. Lastly, require for every flow meter the reading, recording (monthly at minimum), and annual reporting of the flow meter data, all flow meters).

Special Condition for groundwater production: "All POA wells under this permit shall comply with existing well construction standards. Groundwater production shall occur from the predominantly basalt unit below the predominantly basin fill unit by continuous casing and continuous seal through the predominantly basin fill unit and into the predominantly basalt unit." The proposed POA well (LAKE 52568) meets this condition.

The groundwater system is identified as generally unconfined with discontinuous low permeability layers causing local (discontinuous, limited) confinement. Generally, lower transmissivity (lower permeability) sediment (predominantly basin-fill sediment unit) of varying thickness overlies higher transmissivity (higher permeability) basalt (predominantly basalt unit). Groundwater occurs in both the predominantly basin-fill sediment unit and the predominantly basalt unit. Groundwater is vertically connected within each unit and between each unit. This is based upon investigations by Sammel and Craig (1981) for Warner Valley, Morgan (1988) for Goose Lake Valley and Miller (1984 and 1986) for the Fort Rock and Christmas Valley area. Sammel and Craig (1981) particularly note the similarity of the hydrogeology in the Warner lakes Valley to the Klamath Basin.

References Used:

References consulted were:

Hampton, E.R., 1964, Geologic factors that control the occurrence and availability of ground water in the Fort Rock Basin, Lake County, Oregon: USGS Professional Paper 383-B, 29 p.

Hunt, B., 2003, Unsteady stream depletion when pumping from semiconfined aquifer: Journal of Hydrologic Engineering, January/February, 2003.

McFarland, W.D. and Ryals, G.N., 1991, Adequacy of available hydrogeologic data for evaluation of declining ground-water levels in the Fort Rock Basin, south-central Oregon: USGS Water Resources Investigations Report 89-4057, 47 p.

Miller, D.W., 1984, Appraisal of ground-water conditions in the Fort Rock Basin, Lake County, Oregon: OWRD Open File Report, 157 p.

Miller, D.W., 1986, Ground-water conditions in the Fort Rock Basin, northern Lake County, Oregon: OWRD Ground Water Report No. 31, 196 p.

Morgan, D.S., 1988, Geohydrology and numerical model analysis of ground-water flow in the Goose Lake Basin, Oregon and California: USGS Water Resources Investigations Report 87-4058, 92 p.

Oregon Water Resources Department, 1989, Goose and Summer Lakes Basin report: OWRD Basin Report, 112 p.

Peterson, N.V. and McIntyre, J.R., 1970, The reconnaissance geology and mineral resources of eastern Klamath County and western Lake County, Oregon: DOGAMI Bulletin 66, 70 p.

Phillips, K.N. and VanDenburgh, A.S., 1971, Hydrology and geochemistry of Abert, Summer, and Goose Lakes, and other closed-basin lakes in south-central Oregon: USGS Professional Paper 502-B, 86p.

Sammel, E.A. and Craig, R.W., 1981, The geothermal hydrology of Warner Valley, Oregon: a reconnaissance study: USGS Professional Paper 1044-I, 147 p.

Theis, C.V. 1935. The relation between the lowering of the piezometric surface and the rate and duration of discharge of a well using groundwater storage. American Geophysical Union Transactions, 16 annual meeting, vol. 16, pg. 519-524.

Walker, G.W., 1963, Reconnaissance geologic map of the eastern half of the Klamath Falls (AMS) quadrangle, Lake and Klamath Counties, Oregon: USGS Mineral Investigations Field Studies Map MF-260.

Walker, G.W. and Repenning, C.A., 1965, Reconnaissance geologic map of the Adel quadrangle, Lake, Klamath, and Malheur Counties, Oregon: USGS Miscellaneous Geologic Investigations Map I-446.

Walker, G.W., 1973, Preliminary geologic and tectonic maps of Oregon east of the 121st meridian: USGS Miscellaneous Field Studies Map MF-495

Waring, G.A., 1908, Geology and water resources of a portion of south-central Oregon: USGS Water Supply Paper 220, 85 p.

Goose and Summer Lakes Basin Program rules (OAR 690-513).

State Observation Wells SOW 377 (LAKE 1886).

Water well reports for wells in Township 35 & 36 South/Range 24 & 25 East

USGS Plush and Hart Lake quad maps (1:24,000 scale)

D. WELL CONSTRUCTION, OAR 690-200

D1. Well #: 1 Logid: LAKE 52568
Well #: _____ Logid: _____

D2. **THE WELL does not meet current well construction standards based upon:**

- a. review of the well log;
- b. field inspection by _____;
- c. report of CWRE _____;
- d. other: (specify) _____

D3. **THE WELL construction deficiency:**

- a. constitutes a health threat under Division 200 rules;
- b. commingles water from more than one ground water reservoir;
- c. permits the loss of artesian head;
- d. permits the de-watering of one or more ground water reservoirs;
- e. other: (specify) _____

D4. **THE WELL construction deficiency is described as follows:** _____

D5. **THE WELL** a. was, or was not constructed according to the standards in effect at the time of original construction or most recent modification.
b. I don't know if it met standards at the time of construction.

Comments: _____

Special Condition for groundwater production: "All POA wells under this permit shall comply with existing well construction standards. Groundwater production shall occur from the predominantly basalt unit below the predominantly basin fill unit by continuous casing and continuous seal through the predominantly basin fill unit and into the predominantly basalt unit." The proposed POA well (LAKE 52568) meets this condition.

D6. **Route to the Enforcement Section.** I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Enforcement Section and the Ground Water Section.


THIS SECTION TO BE COMPLETED BY ENFORCEMENT PERSONNEL

D7. Well construction deficiency has been corrected by the following actions: _____

_____, 200____.
(Enforcement Section Signature)

D8. **Route to Water Rights Section (attach well reconstruction logs to this page).**


Groundwater Permit Application G-17968 Eleanor Fitzgerald, Fitzgerald Ranch Inc.

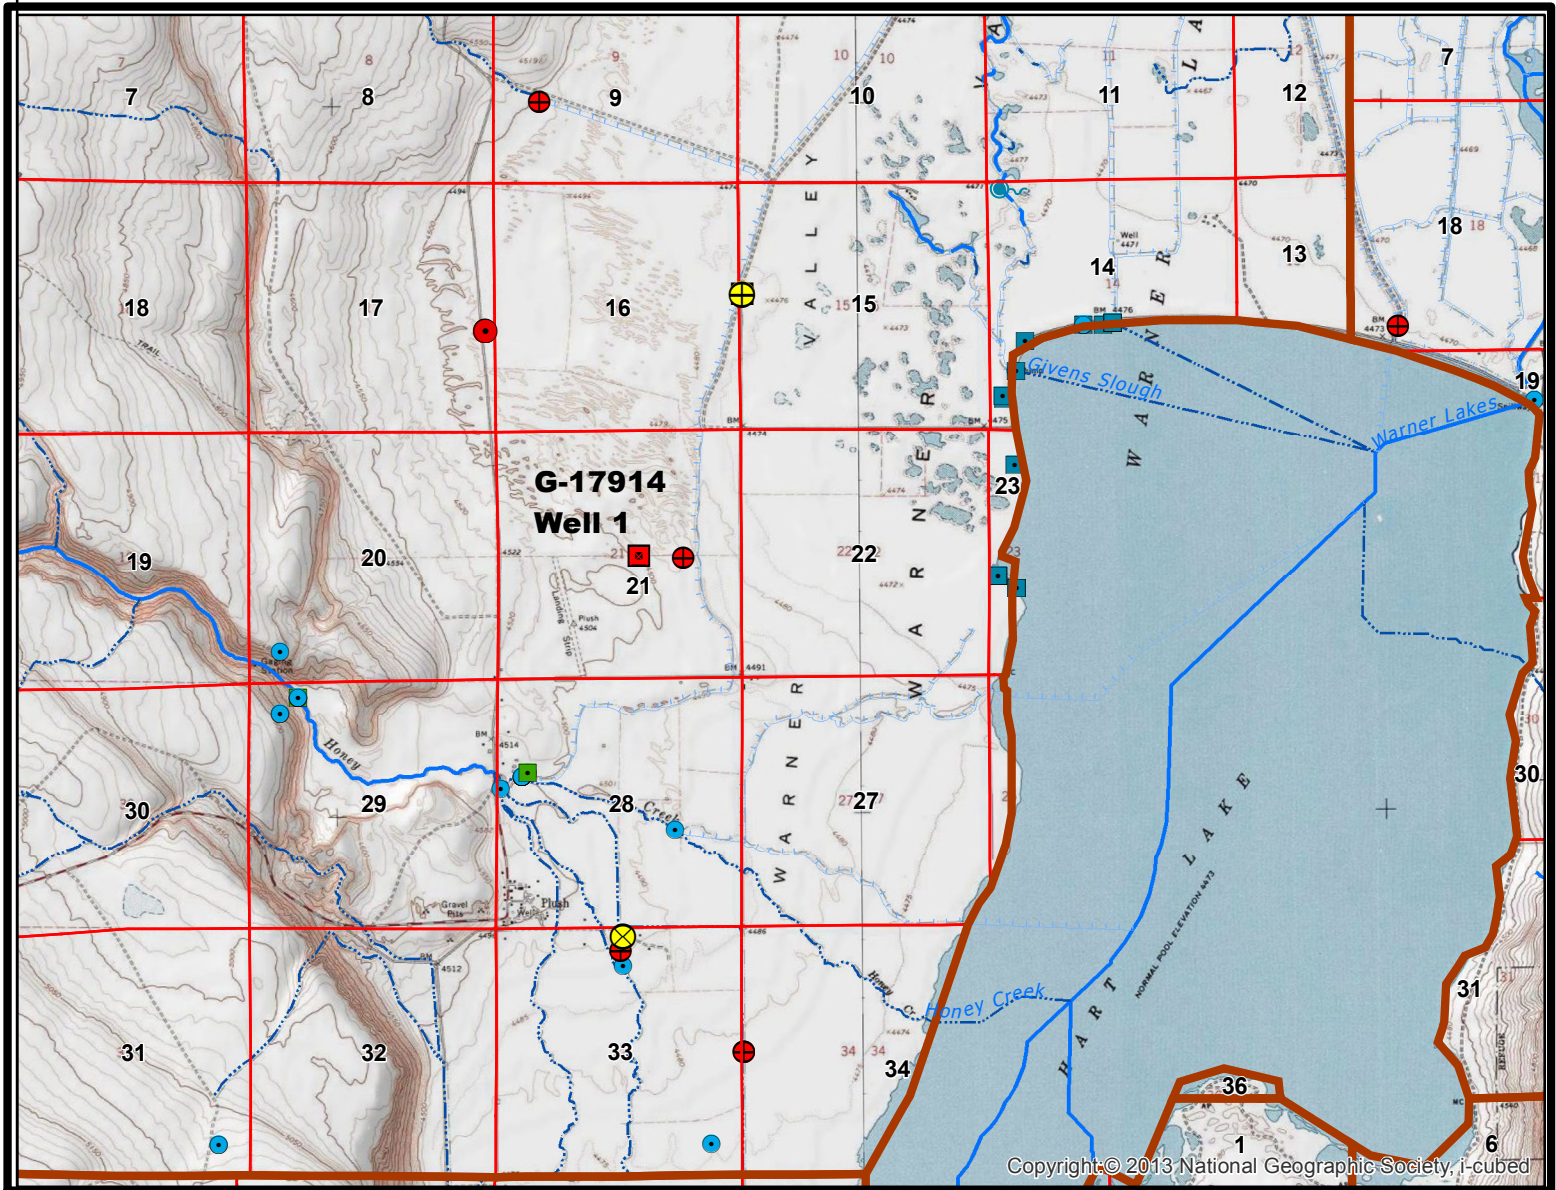

Yellow = Application Noted Well(s)
Red = Other Existing or Proposed Wells
Blue and Other = surface water rights



Groundwater Permit Application G-17968 Eleanor Fitzgerald, Fitzgerald Ranch Inc.

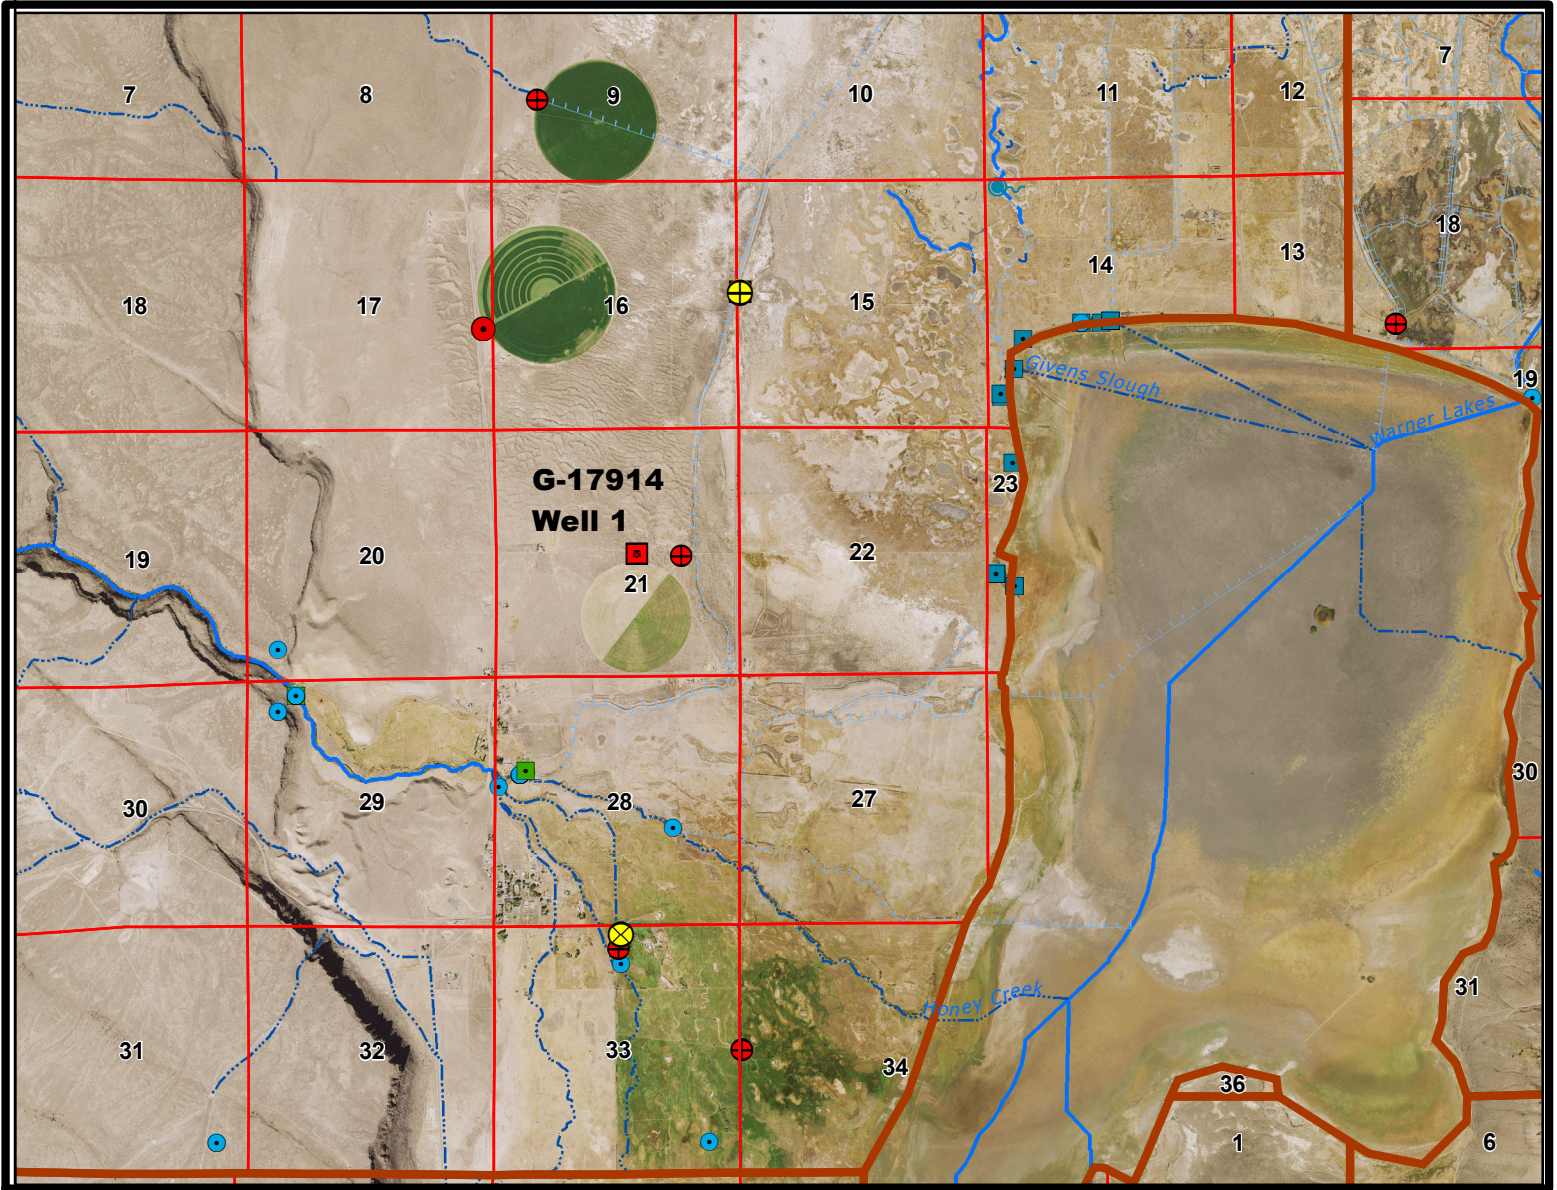

Yellow = Application Noted Well(s)
Red = Other Existing or Proposed Wells
Blue and Other = surface water rights



STATE OF OREGON

WATER SUPPLY WELL REPORT

(as required by ORS 537.765 & OAR 690-205-0210)

WELL I.D. LABEL# L 116663

START CARD # 1024305

ORIGINAL LOG #

10/1/2014

(1) LAND OWNER

Owner Well I.D.
First Name ELANORE Last Name FITZGERALD
Company FITZGERALD RANCH, INC.
Address 28975 HOGBACK RD.
City PLUSH State OR Zip 97637

(2) TYPE OF WORK

PRE-ALTERATION
New Well Deepening Conversion
Alteration (complete 2a & 10) Abandonment (complete 5a)
Casing: Dia + From To Gauge Stl Plstc Wld Thrd
Material From To Amt sacks/lbs
Seal:

(3) DRILL METHOD

(4) PROPOSED USE

(5) BORE HOLE CONSTRUCTION

Table with columns: Dia, From, To, Material, SEAL, Amt, Sacks/lbs. Row 1: 20, 0, 131, Cement, 0, 65, 50, S

How was seal placed: Method A B C D E

Backfill placed from 65 ft. to 131 ft. Material GRAVEL

Filter pack from ft. to ft. Material Size

(5a) ABANDONMENT USING UNHYDRATED BENTONITE

(6) CASING/LINER

Table with columns: Casing, Liner, Dia, +, From, To, Gauge, Stl, Plstc, Wld, Thrd. Row 1: 16, 2, 131, .250, X

(7) PERFORATIONS/SCREENS

Table with columns: Perf, Casing, Screen, Dia, From, To, Scrn/slot width, Slot length, # of slots, Tel/pipe size. Row 1: Casing, 16, 91, 131, .125, 3, 936

(8) WELL TESTS: Minimum testing time is 1 hour

Pump Bailer Air Flowing Artesian
Yield gal/min Drawdown Drill stem/Pump depth Duration (hr)
1500 220 2

Temperature 56 F Lab analysis Yes By
Water quality concerns? Yes (describe below) TDS amount
From To Description Amount Units

(9) LOCATION OF WELL (legal description)

County LAKE Twp 36.00 S N/S Range 24.00 E E/W WM
Sec 15 SW 1/4 of the NW 1/4 Tax Lot 3100
Tax Map Number Lot
Lat ' or " or " DMS or DD
Long ' or " or " DMS or DD
Street address of well Nearest address
FITZGERALD RD. PLUSH

(10) STATIC WATER LEVEL

Table with columns: Date, SWL (psi), + SWL (ft). Row 1: 9/23/2014, 12.5

WATER BEARING ZONES

Table with columns: SWL Date, From, To, Est Flow, SWL (psi), + SWL (ft). Row 1: 9/23/2014, 51, 260, 1500, 12.5

(11) WELL LOG

Table with columns: Material, From, To. Rows: Top soil (0-2), Brown Clay (2-22), Grey Clay (22-51), Broken volcanic conglomerate (51-130), Broken Basalt (130-260)


Date Started 9/11/2014 Complete 9/23/2014

(unbonded) Water Well Constructor Certification
I certify that the work I performed on the construction, deepening, alteration, or abandonment of this well is in compliance with Oregon water supply well construction standards. Materials used and information reported above are true to the best of my knowledge and belief.
License Number 1739 Date 10/1/2014
Signed CHARLES M FRY (E-filed)

(bonded) Water Well Constructor Certification
I accept responsibility for the construction, deepening, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon water supply well construction standards. This report is true to the best of my knowledge and belief.
License Number 1355 Date 10/1/2014
Signed ARTHUR L FRY (E-filed)
Contact Info (optional)


LAKE 1886
T36S/R24E-sec 33 abb
Plush-Hart Lake Area
(Taylor Ranch, Inc.)

Well Depth = 262 ft
Casing Depth = 160 ft
Seal Depth = 0 ft
Aquifer = Basalt

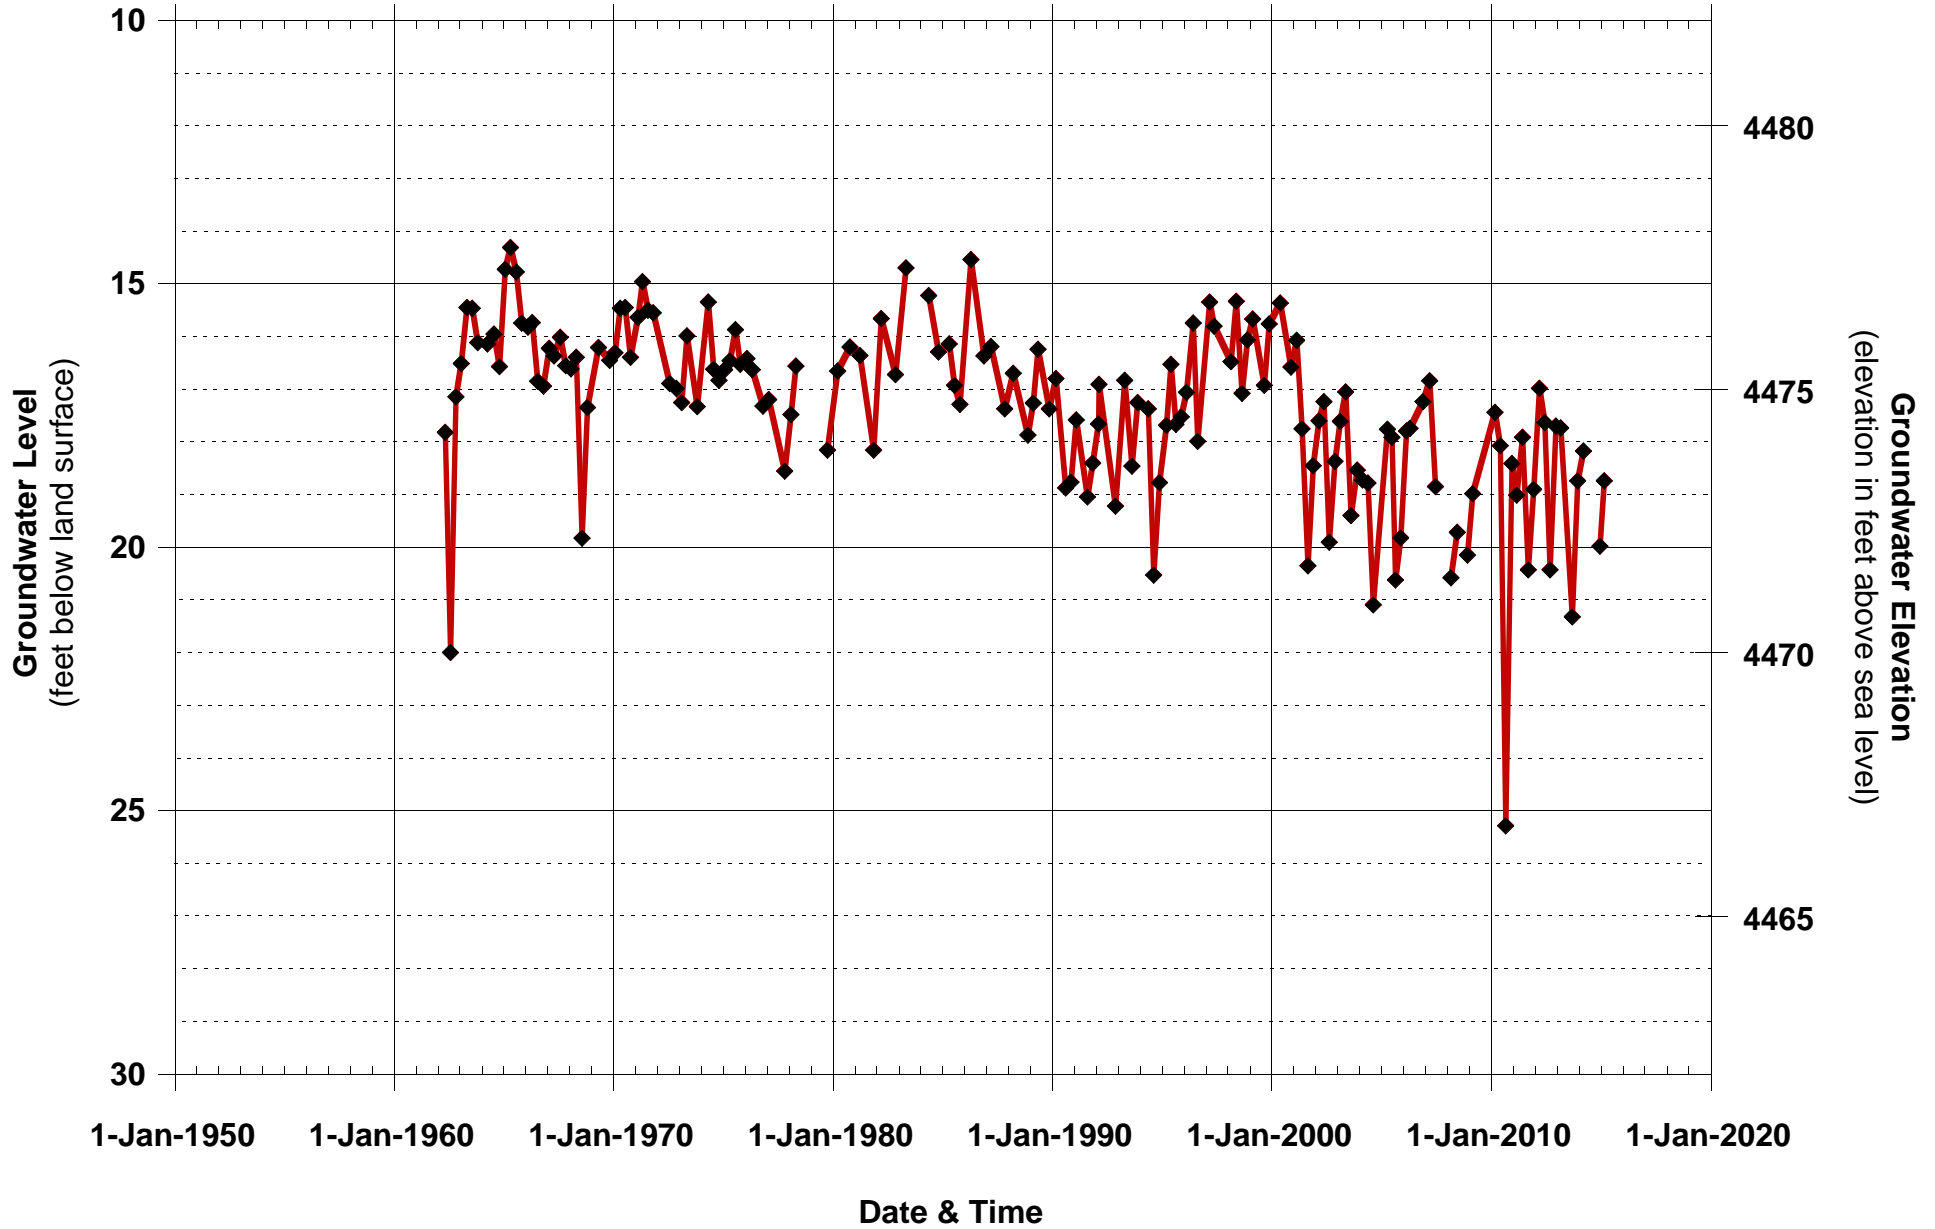

Transient Stream Depletion (Jenkins, 1970; Hunt, 1999, 2003)

Proposed POA to Honey Creek

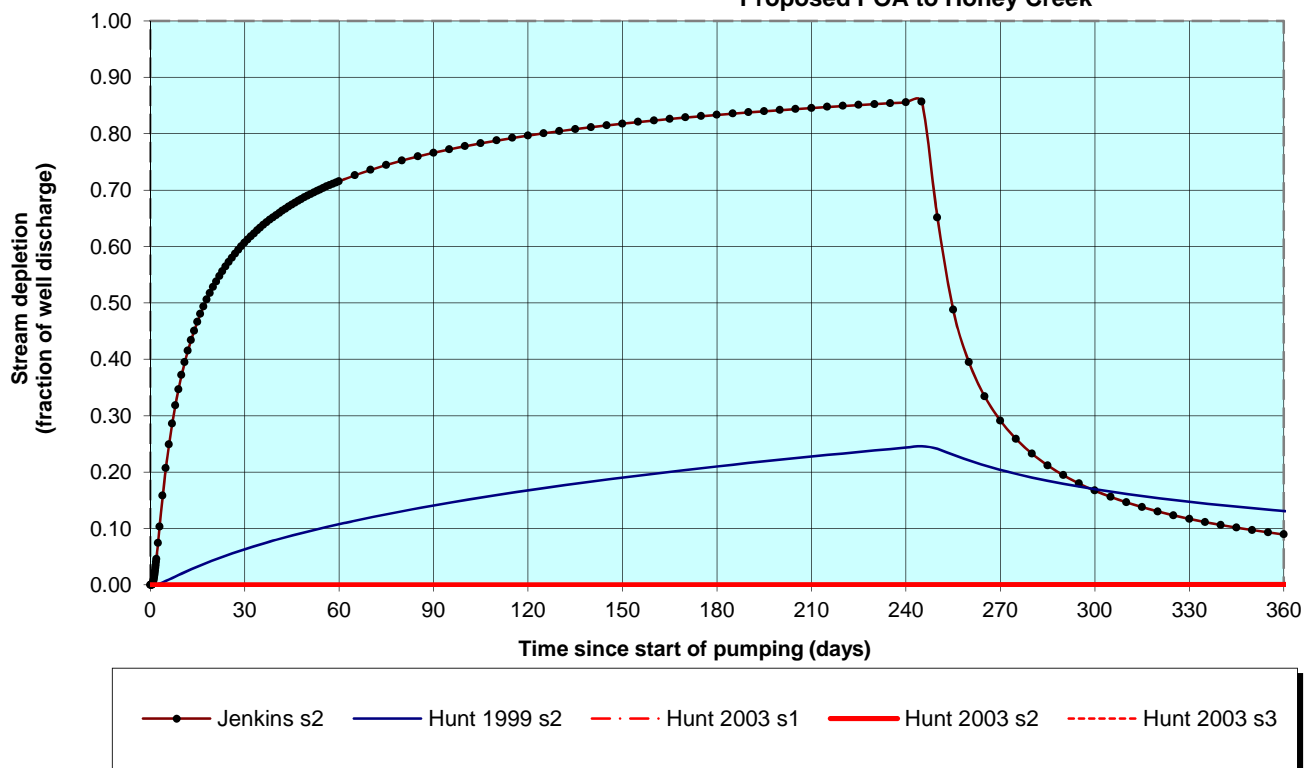

Output for Stream Depletion, Scenerio 2 (s2):						Time pump on (pumping duration) = 245 days						
Days	30	60	90	120	150	180	210	240	270	300	330	360
J SD	60.6%	71.6%	76.6%	79.7%	81.8%	83.3%	84.6%	85.5%	29.1%	16.7%	11.7%	8.9%
H SD 1999	6.3%	10.8%	14.1%	16.8%	19.0%	21.0%	22.8%	24.3%	20.4%	17.0%	14.7%	13.1%
H SD 2003	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.1%	0.1%	0.1%
Qw, cfs	2.260	2.260	2.260	2.260	2.260	2.260	2.260	2.260	2.260	2.260	2.260	2.260
H SD 99, cfs	0.143	0.244	0.318	0.379	0.430	0.475	0.514	0.550	0.461	0.383	0.333	0.296
H SD 03, cfs	0.000	0.000	0.000	0.000	0.000	0.000	0.001	0.001	0.001	0.001	0.002	0.002

Parameters:		Scenario 1	Scenario 2	Scenario 3	Units
Net steady pumping rate of well	Qw	2.26	2.26	2.26	cfs
Time pump on (pumping duration)	tpon	245	245	245	days
Perpendicular from well to stream	a	11500	11500	11500	ft
Well depth	d	400	400	400	ft
Aquifer hydraulic conductivity	K	83	83	83	ft/day
Aquifer saturated thickness	b	100	100	100	ft
Aquifer transmissivity	T	8300	8300	8300	ft*ft/day
Aquifer storativity or specific yield	S	0.001	0.001	0.001	
Aquitard vertical hydraulic conductivity	Kva	1	1	1	ft/day
Aquitard saturated thickness	ba	150	150	150	ft
Aquitard thickness below stream	babs	150	150	150	ft
Aquitard porosity	n	0.2	0.2	0.2	
Stream width	ws	20	20	20	ft
Streambed conductance (lambda)	sbc	0.133333	0.133333	0.133333	ft/day
Stream depletion factor	sdf	15.933735	15.933735	15.933735	days
Streambed factor	sbfb	0.184739	0.184739	0.184739	
input #1 for Hunt's Q_4 function	t'	0.062760	0.062760	0.062760	
input #2 for Hunt's Q_4 function	K'	106.224900	106.224900	106.224900	
input #3 for Hunt's Q_4 function	epsilon'	0.005000	0.005000	0.005000	
input #4 for Hunt's Q_4 function	lamda'	0.184739	0.184739	0.184739	

Theis Equation specific capacity to transmissivity							
Basalt							
Well County	Well Num	Transmissivity	Transmissivity	Open Interval	Conductivity		
		ft ² /day	gpd/ft	feet	ft/day		
LAKE	1779	4,299.52	32,162.65				
LAKE	1825	15,338.56	114,740.40				
LAKE	1839	12,012.45	89,859.37		#DIV/0!		
LAKE	4070	1,551.71	11,607.60		#DIV/0!		
		8,300.56	62,092.51	Average		#DIV/0!	ft/day
Basin-Fill							
Well County	Well Num	Transmissivity	Transmissivity	Open Interval	Conductivity		
		ft ² /day	gpd/ft	feet	ft/day		
LAKE	4281	631.62	4,724.85	640.00	0.99		
		631.62	4,724.85	Average		#DIV/0!	ft/day

Water Availability Analysis

HONEY CR > HART L - AT MOUTH
 GOOSE & SUMMER LAKE BASIN
 Water Availability as of 6/17/2015

Watershed ID #: 31300713 [\(Map\)](#)
 Date: 6/17/2015

Exceedance Level:
 Time: 10:33 AM

[Download Data](#)

Water Availability

Select any Watershed for Details

Nesting Watershed Order	Stream Name ID #	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Sto
1	31300713 HONEY CR> HART L- AT MOUTH	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes

Limiting Watersheds

Monthly Streamflow in Cubic Feet per Second
 Annual Volume at 50% Exceedance in Acre-Feet

Month	Limiting Watershed ID #	Stream Name	Water Available?	Net Water Available
JAN	31300713	HONEY CR > HART L - AT MOUTH	Yes	4.85
FEB	31300713	HONEY CR > HART L - AT MOUTH	Yes	6.32
MAR	31300713	HONEY CR > HART L - AT MOUTH	Yes	10.50
APR	31300713	HONEY CR > HART L - AT MOUTH	Yes	33.10
MAY	31300713	HONEY CR > HART L - AT MOUTH	Yes	33.60
JUN	31300713	HONEY CR > HART L - AT MOUTH	Yes	11.30
JUL	31300713	HONEY CR > HART L - AT MOUTH	No	0.00
AUG	31300713	HONEY CR > HART L - AT MOUTH	Yes	0.04
SEP	31300713	HONEY CR > HART L - AT MOUTH	Yes	0.06
OCT	31300713	HONEY CR > HART L - AT MOUTH	Yes	0.85
NOV	31300713	HONEY CR > HART L - AT MOUTH	Yes	2.87
DEC	31300713	HONEY CR > HART L - AT MOUTH	Yes	3.55
ANN	31300713	HONEY CR > HART L - AT MOUTH	Yes	15,400.00

Detailed Reports for Watershed ID #31300713

HONEY CR > HART L - AT MOUTH
 GOOSE & SUMMER LAKE BASIN
 Water Availability as of 6/17/2015

Watershed ID #: 31300713 [\(Map\)](#)
 Date: 6/17/2015

Exceedance Level:
 Time: 10:33 AM

Water Availability Calculation

Monthly Streamflow in Cubic Feet per Second

Annual Volume at 50% Exceedance in Acre-Feet

Month	Natural Stream Flow	Consumptive Uses and Storages	Expected Stream Flow	Reserved Stream Flow	Instream Flow Requirement	Net Water Available
JAN	5.06	0.21	4.85	0.00	0.00	4.85
FEB	6.64	0.33	6.32	0.00	0.00	6.32
MAR	12.60	2.06	10.50	0.00	0.00	10.50
APR	41.50	8.36	33.10	0.00	0.00	33.10
MAY	53.80	20.20	33.60	0.00	0.00	33.60
JUN	26.80	15.50	11.30	0.00	0.00	11.30
JUL	4.32	4.32	0.00	0.00	0.00	0.00
AUG	2.27	2.23	0.04	0.00	0.00	0.04
SEP	2.07	2.01	0.06	0.00	0.00	0.06
OCT	2.14	1.29	0.85	0.00	0.00	0.85
NOV	3.01	0.14	2.87	0.00	0.00	2.87
DEC	3.74	0.19	3.55	0.00	0.00	3.55
ANN	18,800.00	3,440.00	15,400.00	0.00	0.00	15,400.00

Detailed Report of Consumptive Uses and Storage

Consumptive Uses and Storages in Cubic Feet per Second

Month	Storage	Irrigation	Municipal	Industrial	Commercial	Domestic	Agricultural	Other	Total
JAN	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21
FEB	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33
MAR	0.71	1.35	0.00	0.00	0.00	0.00	0.00	0.00	2.06
APR	2.05	6.31	0.00	0.00	0.00	0.00	0.00	0.00	8.36
MAY	2.81	17.40	0.00	0.00	0.00	0.00	0.00	0.00	20.20
JUN	1.18	14.40	0.00	0.00	0.00	0.00	0.00	0.00	15.50
JUL	0.19	4.13	0.00	0.00	0.00	0.00	0.00	0.00	4.32
AUG	0.07	2.16	0.00	0.00	0.00	0.00	0.00	0.00	2.23
SEP	0.07	1.94	0.00	0.00	0.00	0.00	0.00	0.00	2.01
OCT	0.09	1.20	0.00	0.00	0.00	0.00	0.00	0.00	1.29
NOV	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14
DEC	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19

Detailed Report of Reservations for Storage and Consumptive Uses

Reserved Streamflow in Cubic Feet per Second

No reservations were found for this watershed.

Detailed Report of Instream Flow Requirements

Instream Flow Requirements in Cubic Feet per Second

No instream flow requirements were found for this watershed.