

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO: Water Rights Section Date 10/07/2015
 FROM: Groundwater Section Jen Woody
Reviewer's Name
 SUBJECT: Application G- 18003 Supersedes review of 8/13/2015
Date of Review(s)

PUBLIC INTEREST PRESUMPTION; GROUNDWATER

OAR 690-310-130 (1) *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525.* Department staff review groundwater applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. **This review is based upon available information and agency policies in place at the time of evaluation.**

A. GENERAL INFORMATION: Applicant's Name: Woodburn Organic Farms LLC County: Marion

A1. Applicant(s) seek(s) 0.49 cfs from 1 well(s) in the Willamette Basin,
Molalla - Pudding River subbasin Quad Map: Woodburn

A2. Proposed use Irrigation and temperature control Seasonality: March 1 - October 31

A3. Well and aquifer data (**attach and number logs for existing wells; mark proposed wells as such under logid**):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	PROP 999999	3	Sand and Gravel	0.49	T5S/R1W-17 SW SE	1100' N, 1485' W fr SE cor S 17
2						
3						
4						
5						

* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	165		30*		300**							

Use data from application for proposed wells.

A4. **Comments:** *Water level estimated from MARI 1762, a nearby well in the same aquifer.
**Depth is described as 200-300 feet deep per 10/07/2015 email.

A5. **Provisions of the Willamette** Basin rules relative to the development, classification and/or management of groundwater hydraulically connected to surface water are, or are not, activated by this application. (Not all basin rules contain such provisions.)

Comments: The aquifer is confined, so 690-502-0240 does not apply.

A6. **Well(s) #** _____, _____, _____, _____, _____, tap(s) an aquifer limited by an administrative restriction.
 Name of administrative area: _____
 Comments: _____

B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

B1. **Based upon available data**, I have determined that groundwater* for the proposed use:

- a. is over appropriated, is not over appropriated, or **cannot be determined to be** over appropriated during any period of the proposed use. * This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b. **will not** or **will** likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
- c. **will not** or **will** likely to be available within the capacity of the groundwater resource; or
- d. **will, if properly conditioned**, avoid injury to existing groundwater rights or to the groundwater resource:
 - i. The permit should contain condition #(s) 7C, 7P;
 - ii. The permit should be conditioned as indicated in item 2 below.
 - iii. The permit should contain special condition(s) as indicated in item 3 below;

- B2. a. **Condition** to allow groundwater production from no deeper than _____ ft. below land surface;
- b. **Condition** to allow groundwater production from no shallower than _____ ft. below land surface;
- c. **Condition** to allow groundwater production only from the alluvial groundwater reservoir ~~between approximately~~ _____ ft. and _____ ft. below land surface;
- d. **Well reconstruction** is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.

Describe injury –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): _____

B3. **Groundwater availability remarks:** _____

The well on this application will likely produce water from the Willamette aquifer (Woodward and Gannett, 1998). About 60 feet of saturated sand and gravel are confined beneath about 100 feet of Willamette Silt in the vicinity of the subject wells. The Willamette Aquifer is underlain by approximately 1000 feet of the Willamette Confining unit.

Groundwater level data are sparse in the immediate vicinity of this application. MARI 1758 , located about 2 miles to the east, is reasonably stable and located also in the Willamette Aquifer. Another group of wells in Sections 21, 22 and 28 show similar water level stability (see attached hydrograph). This suggests that the resource is generally stable at the current level of use.

C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. **690-09-040 (1):** Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Sand and Gravel of the Willamette Aquifer	<input checked="" type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>

Basis for aquifer confinement evaluation: Well logs and Gannett and Caldwell (1998) report 40 to 60 feet of saturated Willamette Aquifer (sand and gravel of alluvial origin), overlain by 80 to 100 feet of low permeability Willamette Silt. Aquifer test data from the Willamette aquifer suggests storage values consistent with confined aquifers.

C2. **690-09-040 (2) (3):** Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
1	1	Pudding River	135	110	3190	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Basis for aquifer hydraulic connection evaluation: Groundwater elevation is estimated from MARI 1762 and MARI 1813 well log data. Groundwater is coincident with the Pudding River at the given distances, indicating hydraulic connection. There are approximately 100 feet of clay overlying the Willamette Aquifer. This prevents an efficient hydraulic connection to the Pudding River and the unnamed tributary.

Water Availability Basin the well(s) are located within: Watershed ID #: 151. PUDDING R > MOLALLA R - AB MILL CR

C3a. **690-09-040 (4):** Evaluation of stream impacts for each well that has been determined or assumed to be hydraulically connected and less than 1 mile from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% natural flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < ¼ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
1	1	<input type="checkbox"/>	<input type="checkbox"/>	IS73532B	36	<input checked="" type="checkbox"/>	67.3	<input type="checkbox"/>	<<25%	<input checked="" type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

	SW #		Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
			<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
			<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
			<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
			<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

Comments: The proposed rate (0.49 cfs) triggers PSI because it is greater than 1% of the instream water right on the Pudding River.

The Willamette Silt acts as a resistor to streambed flux. Calculated stream depletion using the Hunt 2003 model indicates interference with the Pudding River at 30 days is much less than 25% at both wells.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
(A) = Total Interf.													
(B) = 80 % Nat. Q													
(C) = 1 % Nat. Q													

D. WELL CONSTRUCTION, OAR 690-200

D1. Well #: _____ Logid: _____


D2. **THE WELL does not appear to meet current well construction standards based upon:**

- a. review of the well log;
- b. field inspection by _____;
- c. report of CWRE _____;
- d. other: (specify) _____

D3. **THE WELL construction deficiency or other comment is described as follows:** _____

D4. **Route to the Well Construction and Compliance Section for a review of existing well construction.**

G-18003 Woodburn Organic Farms LLC T5S/R1W- Section 16 & 17

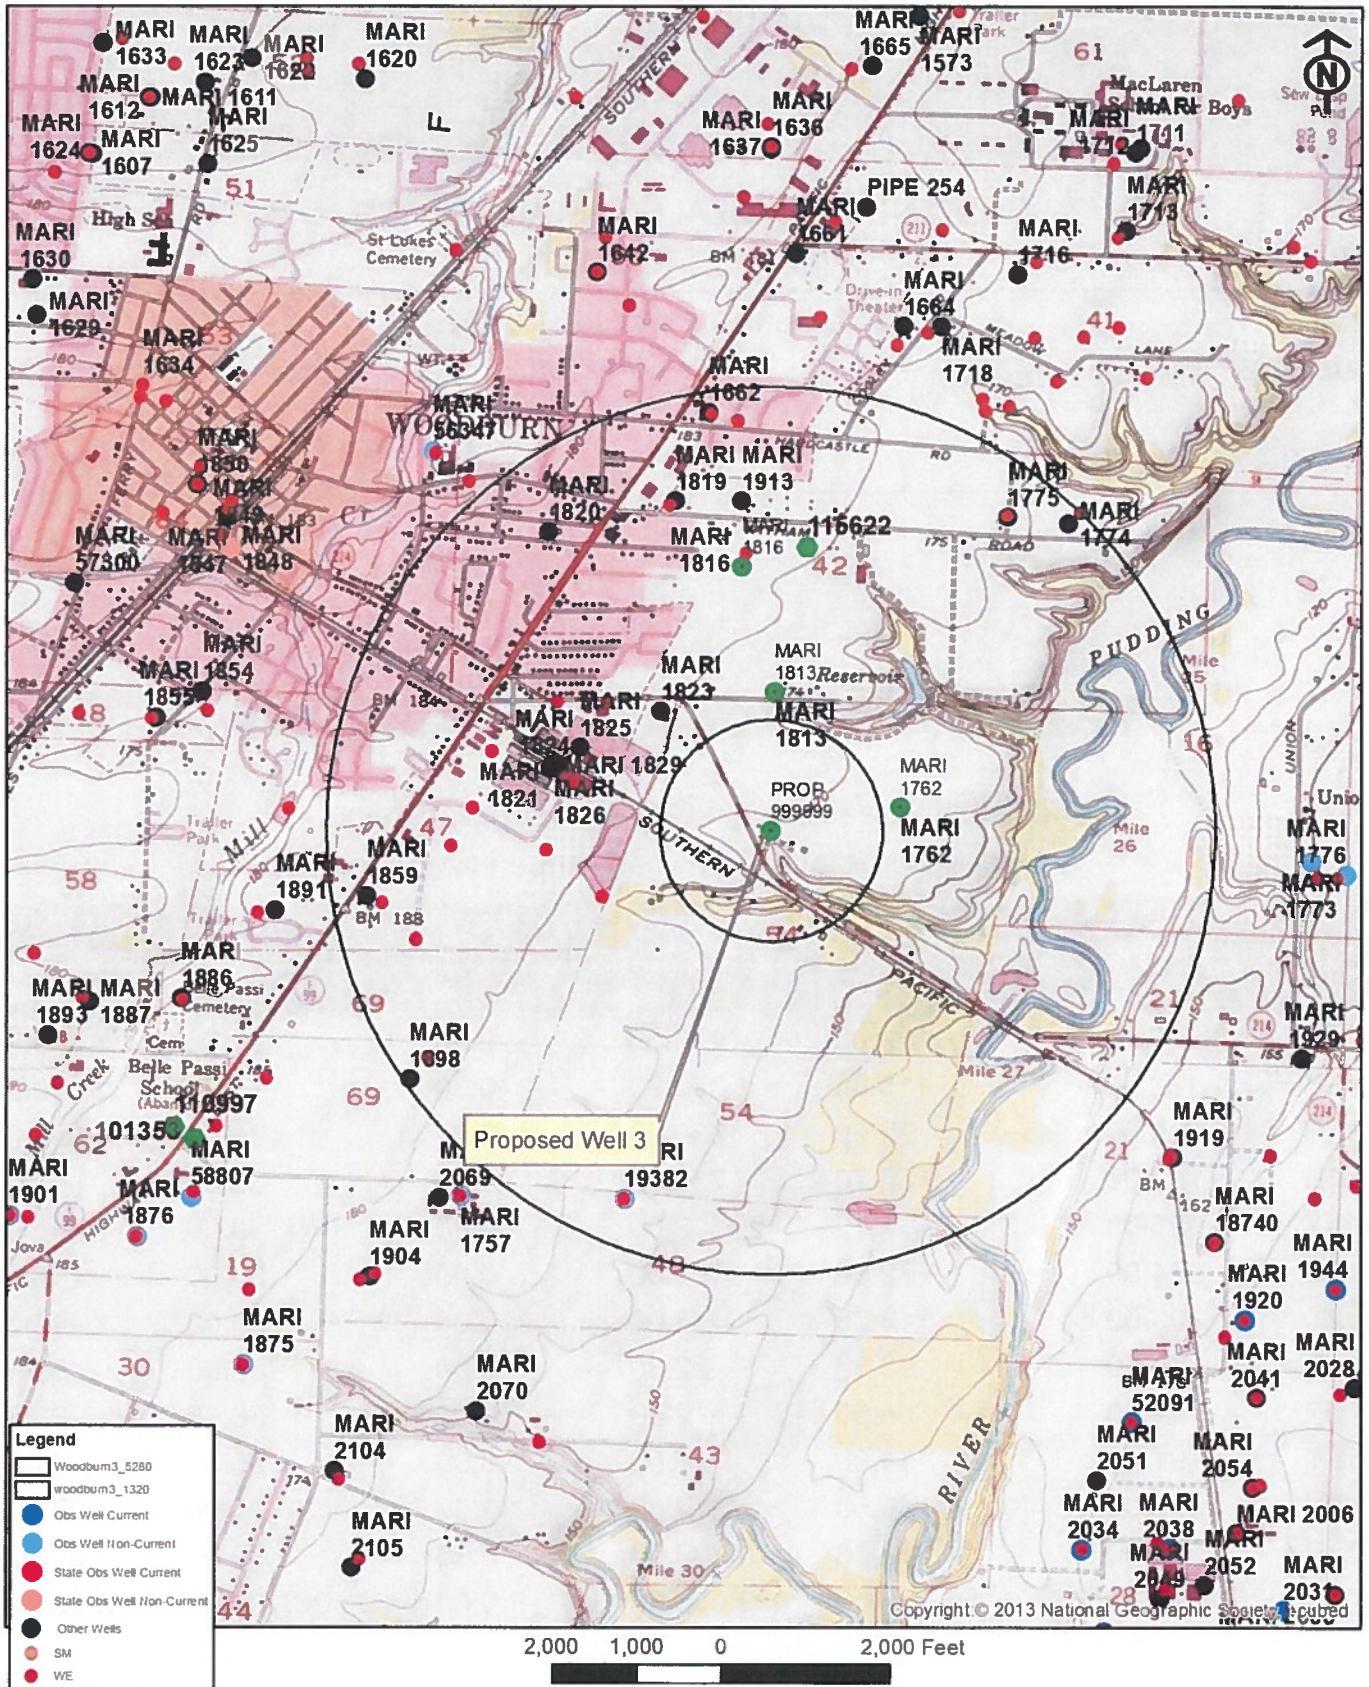

Water Availability Tables

Water Availability Analysis Detailed Reports

PUDDING R > MOLALLA R - AB MILL CR WILLAMETTE BASIN

Water Availability as of 3/17/2015

Watershed ID #: 151 ([Map](#))

Exceedance Level:80%


Date: 3/17/2015

Time: 11:22 AM

Water Availability Calculation


Monthly Streamflow in Cubic Feet per Second
Annual Volume at 50% Exceedance in Acre-Feet

Month	Natural Stream Flow	Consumptive Uses and Storages	Expected Stream Flow	Reserved Stream Flow	Instream Flow Requirement	Net Water Available
JAN	1,040.00	125.00	915.00	0.00	36.00	879.00
FEB	1,180.00	115.00	1,070.00	0.00	36.00	1,030.00
MAR	1,010.00	79.90	930.00	0.00	36.00	894.00
APR	787.00	55.70	731.00	0.00	36.00	695.00
MAY	425.00	52.70	372.00	0.00	36.00	336.00
JUN	224.00	72.90	151.00	0.00	36.00	115.00
JUL	109.00	113.00	-4.01	0.00	36.00	-40.00
AUG	71.00	93.30	-22.30	0.00	36.00	-58.30
SEP	67.30	54.50	12.80	0.00	36.00	-23.20
OCT	91.60	14.00	77.60	0.00	36.00	41.60
NOV	363.00	48.60	314.00	0.00	36.00	278.00
DEC	957.00	119.00	838.00	0.00	36.00	802.00
ANN	706,000.00	56,900.00	649,000.00	0.00	26,100.00	625,000.00

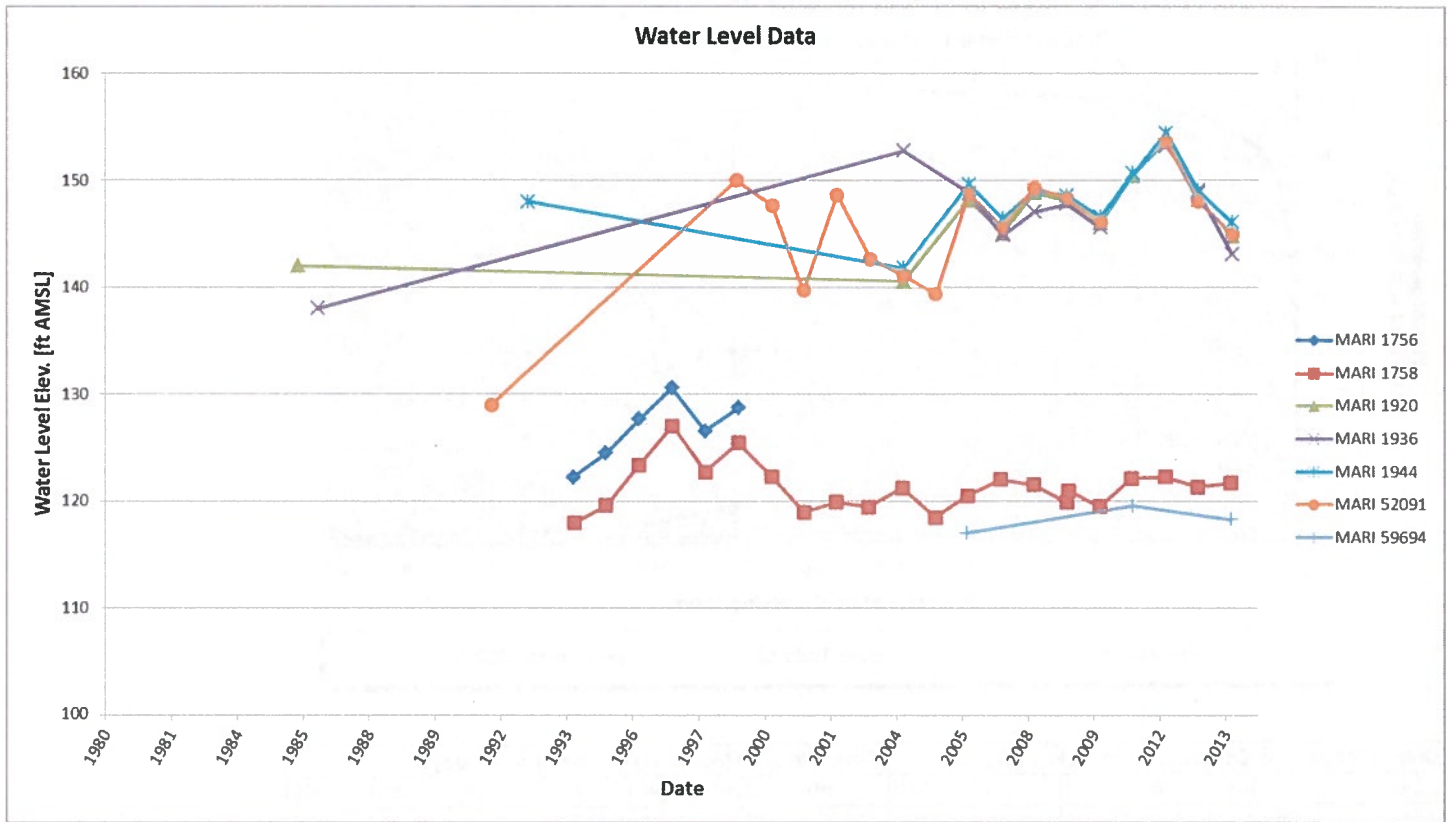

Transient Stream Depletion (Jenkins, 1970; Hunt, 1999, 2003)

Proposed well #3: G18003 and Pudding River

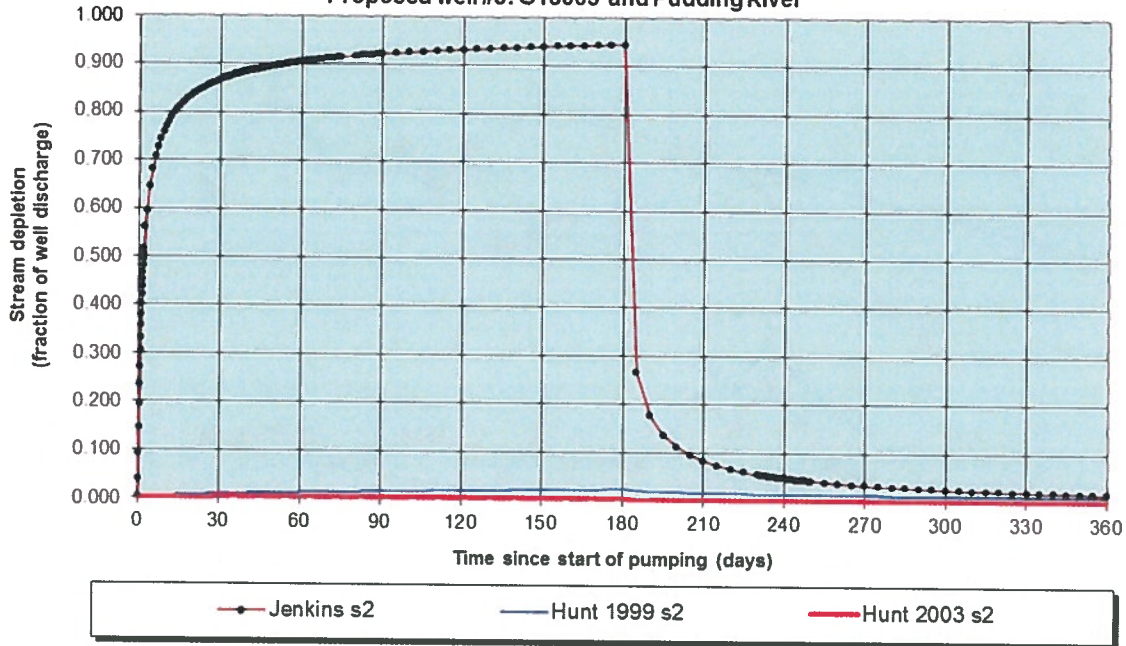

Output for Stream Depletion, Scenerio 2 (s2):						Time pump on (pumping duration) = 180 days						
Days	30	60	90	120	150	180	210	240	270	300	330	360
J SD	86.6%	90.5%	92.3%	93.3%	94.0%	94.5%	8.3%	4.7%	3.3%	2.5%	2.0%	1.6%
H SD 1999	0.8%	1.2%	1.5%	1.8%	2.0%	2.2%	1.6%	1.4%	1.2%	1.1%	1.0%	1.0%
H SD 2003	0.24%	0.25%	0.25%	0.25%	0.25%	0.25%	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%
Qw, cfs	0.490	0.490	0.490	0.490	0.490	0.490	0.490	0.490	0.490	0.490	0.490	0.490
H SD 99, cfs	0.004	0.006	0.007	0.009	0.010	0.011	0.008	0.007	0.006	0.006	0.005	0.005
H SD 03, cfs	0.001	0.001	0.001	0.001	0.001	0.001	0.000	0.000	0.000	0.000	0.000	0.000

Parameters:		Scenario 1	Scenario 2	Scenario 3	Units
Net steady pumping rate of well	Qw	220.00	220.00	220.00	gpm
Time pump on (pumping duration)	tpon	180	180	180	days
Perpendicular from well to stream	a	3650	3190	1320	ft
Well depth	d	220	220	220	ft
Aquifer hydraulic conductivity	K	10	50	100	ft/day
Aquifer saturated thickness	b	60	60	60	ft
Aquifer transmissivity	T	600	3000	6000	ft*ft/day
Aquifer storativity or specific yield	S	0.0003	0.0005	0.003	
Aquitard vertical hydraulic conductivity	Kva	0.01	0.008	0.0004	ft/day
Aquitard saturated thickness	ba	100	100	100	ft
Aquitard thickness below stream	babs	40	40	40	ft
Aquitard porosity	n	0.2	0.2	0.2	
Stream width	ws	20	20	20	ft
Streambed conductance (lambda)	sbc	0.005000	0.004000	0.000200	ft/day
Stream depletion factor	sdf	6.661250	1.696017	0.871200	days
Streambed factor	sbf	0.030417	0.004253	0.000044	