

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO: Water Rights Section Date February 23, 2017  
 FROM: Groundwater Section Aurora C Bouchier  
 Reviewer's Name  
 SUBJECT: Application G- 18327 Supersedes review of November 15, 2016  
 Date of Review(s)

**PUBLIC INTEREST PRESUMPTION; GROUNDWATER**

**OAR 690-310-130 (1)** *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525. Department staff review groundwater applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. This review is based upon available information and agency policies in place at the time of evaluation.*

**A. GENERAL INFORMATION:** Applicant's Name: Treco Investments LLC/Brent Smith County: Marion

A1. Applicant(s) seek(s) 0.73 cfs from 3 well(s) in the Willamette Basin,  
Molalla-Pudding subbasin

A2. Proposed use Irrigation (58.6 acres) Seasonality: March 1 – October 31

A3. Well and aquifer data (attach and number logs for existing wells; mark proposed wells as such under logid):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	MARI 2068 **	1	Alluvium	0.73 <sup>1</sup>	5S/1W-29 SE-SW	1200' N, 3750' W fr SE cor S 29
2	MARI 2105	2	Alluvium	0.73 <sup>2</sup>	5S/1W-30 SE-NE	940' S & 460' E fr SE cor, LOT 1, S30
3	MARI 65739	3	Alluvium	0.73 <sup>3</sup>	5S/1W-32 SE-NW	1920' S, 1795' E fr NW cor S 32

\* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	149	?	13	4/25/1978	363	0-22	+2'6" – 228'7", +2'5" – 232'7"	Na	16" casing: 107-207, 8" casing: 152-212	?		
2	166	39	22	6/4/1958	140	0-20	0-121	Na	90-117	?		
3	147	?***	37	6/17/2015	299	0-65	+1.5-153	128.5-148.5, 180-198, 294-299	148-180, 198-294	1200	53	P

Use data from application for proposed wells.

A4. **Comments:** \*\*Note in application reads "Well 1 was constructed with 2 separate casings side-by-side within the borehole." The second casing (6 inch) is labeled as a gravel feed on the well log and is likely not for production.  
<sup>1</sup>Well 1 is authorized under Inchoate T 11837 (1.31 cfs primary irrigation split between 3 wells and 0.69 cfs supplemental irrigation) and Certificate 89886 RR (0.16 cfs split between 2 wells) – if all authorized water was produced at this well the stacking would sum to 2.89 cfs, this groundwater review evaluates the stacked rate.  
<sup>2</sup>Well 2 is authorized under Certificate 30611 (0.69 cfs), Inchoate T 11837 (1.31 cfs primary irrigation split between 3 wells and 0.09 cfs commercial) and Certificate 89886 RR (0.16 cfs split between 2 wells) – if all authorized water was produced at this well the stacking would sum to 2.82 cfs, this groundwater review evaluates the stacked rate.  
<sup>3</sup>Well 3 is authorized under Inchoate T 11837 (1.31 cfs primary irrigation split between 3 wells) – if all authorized water was produced at this well the stacking would sum to 2.04 cfs, this groundwater review evaluates the stacked rate.  
\*\*\* There is a sealed off water bearing zone from 18-37 feet, but no static water level was measured for this interval. The log says all sand and gravel layers were water bearing. The well is sealed to a depth of 65 feet with the first sand and gravel layer below the seal listed at 79 – 86 feet (described as being cemented). It is difficult to determine if the seal is holding.

A5.  **Provisions of the** Willamette Basin rules relative to the development, classification and/or management of groundwater hydraulically connected to surface water  **are, or**  **are not,** activated by this application. (Not all basin rules contain such provisions.)

Comments: Although these three well logs are not clear-cut, based on additional well logs in the area and published water table maps, it is likely that the wells are producing from a confined aquifer. Therefore, the pertinent rules (OAR 690-502-0240) do not apply.

A6.  Well(s) # \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, tap(s) an aquifer limited by an administrative restriction.  
Name of administrative area: \_\_\_\_\_  
Comments: \_\_\_\_\_



**B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070**

B1. **Based upon available data**, I have determined that groundwater\* for the proposed use:

- a.  is over appropriated,  is **not** over appropriated, *or*  **cannot be determined to be** over appropriated during any period of the proposed use. \* This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b.  **will not** *or*  **will** likely be available in the amounts requested without injury to prior water rights. \* This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
- c.  **will not** *or*  **will** likely to be available within the capacity of the groundwater resource; or
- d.  **will, if properly conditioned**, avoid injury to existing groundwater rights or to the groundwater resource:
  - i.  The permit should contain condition #(s) 7N, Large water use reporting;
  - ii.  The permit should be conditioned as indicated in item 2 below.
  - iii.  The permit should contain special condition(s) as indicated in item 3 below;

- B2. a.  **Condition** to allow groundwater production from no deeper than \_\_\_\_\_ ft. below land surface;
- b.  **Condition** to allow groundwater production from no shallower than \_\_\_\_\_ ft. below land surface;
- c.  **Condition** to allow groundwater production only from the alluvial groundwater reservoir between approximately \_\_\_\_\_ ft. and \_\_\_\_\_ ft. below land surface;
- d.  **Well reconstruction** is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.

**Describe injury** –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

B3. **Groundwater availability remarks:** \_\_\_\_\_

Over 900 feet of alluvial sediments occur beneath land surface in the vicinity of the proposed POAs (Gannett et al, 1998). The water table occurs approximately 20-30 feet below land surface in this region (Conlon et al., 2005, and Woodward et al., 1998). Productive sand and gravel beds occur throughout the sequence separated layers of lower permeability silts and clay which progressively confine deeper water-bearing zones (Gannet and Caldwell, 1998, and Woodward et al., 1998).

State Observation Well 253 (MARI 2666) is located approximately 1.7 miles west, and State Observation Well 165 (MARI 3054) is located approximately 1.9 miles southwest. The hydrograph of the nearby State Observation Wells show relatively stable long-term trends for alluvial wells in the vicinity of the proposed POAs , with approximately 4-f feet of decline since the mid 1960's - although the seasonal fluctuation may be increasing. **This possible increased seasonal fluctuation in groundwater level, plus increased groundwater development in the area, indicates a need for additional water-level monitoring (7N) if this permit is issued.**

There is a note in the application that reads "It is understood that the OWRD will likely make a finding that there will be the Potential for Substantial Interference with the Pudding River from the proposed groundwater use. The applicant has an existing surface water right on the property and is willing to propose cancellation of part or all of the surface water right to mitigate for the estimated impacts to the surface water.

**C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040**

C1. **690-09-040 (1):** Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Alluvial	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Alluvial	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	Alluvial	<input checked="" type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>

**Basis for aquifer confinement evaluation:** Based on well logs in the area (MARI 2105, MARI 18349) and published water table maps (Conlon et al., 2005, and Woodward et al, 1998), it is likely that the wells are producing from a confined aquifer.

C2. **690-09-040 (2) (3):** Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
1	1	Pudding river	~136	105-112	725	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2	1	Pudding River	~144	105-107	2595	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
3	1	Pudding River	~110	105-120	2330	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
1	2	Farmers Ck/Sam Brown Ck	~136	105-130	1950	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2	2	Farmers Ck/Sam Brown Ck	~144	105-137	4100	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
3	2	Farmers Ck/Sam Brown Ck	~110	105-124	970	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Basis for aquifer hydraulic connection evaluation:** Published water-table maps indicate that groundwater in the alluvial aquifer flows toward, and discharges to, the Pudding River and its perennial tributaries (Woodward et al., 1998 Plate 1, and Conlon et al., 2005, Plate 1). Head data from MARI 2105 and nearby wells corroborate this. However, there is a layer of low permeability Willamette Silt between the aquifer and the bottom of the surface water bodies, so the connection is likely inefficient. Farmers Creek and Sam Brown Creek join together and enter the Pudding River as a single tributary, therefore they are treated as a single entity for this analysis.

**Water Availability Basin the well(s) are located within:** 151: PUDDING R> MOLALLA R- AB MILL CR

C3a. **690-09-040 (4):** Evaluation of stream impacts for each well that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% natural flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked  box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < ¼ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
1	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Na	Na	<input type="checkbox"/>	67.30	<input checked="" type="checkbox"/>	<<25%	<input checked="" type="checkbox"/>
2	1	<input type="checkbox"/>	<input type="checkbox"/>	Na	Na	<input type="checkbox"/>	67.30	<input checked="" type="checkbox"/>	<<25%	<input checked="" type="checkbox"/>
3	1	<input type="checkbox"/>	<input type="checkbox"/>	Na	Na	<input type="checkbox"/>	67.30	<input checked="" type="checkbox"/>	<<25%	<input checked="" type="checkbox"/>
1	2	<input type="checkbox"/>	<input type="checkbox"/>	Na	Na	<input type="checkbox"/>	Na	<input type="checkbox"/>	<<25%	<input type="checkbox"/>
2	2	<input type="checkbox"/>	<input type="checkbox"/>	Na	Na	<input type="checkbox"/>	Na	<input type="checkbox"/>	<<25%	<input type="checkbox"/>
3	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Na	Na	<input type="checkbox"/>	Na	<input type="checkbox"/>	<<25%	<input checked="" type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>



C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

	SW #	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

**Comments:** Well 1 (MARI 2068) was modeled at the stacked rate (2.89 cfs, or 1297 gpm) at a distance of 725 feet for interference with the Pudding River. The stream depletion at 30 days was estimated using the Hunt 2003 model. Well 1 was not modeled against Farmers/Sam Brown Creek - due to the greater distance the interference would likely be less. Well 2 (MARI 2105) was modeled at the stacked rate (2.82 cfs, or 1266 gpm) at a distance of 2,595 feet for interference with the Pudding River. The stream depletion at 30 days was estimated using the Hunt 2003 model. Well 2 was not modeled against Farmers/Sam Brown Creek - due to the greater distance the interference would likely be less (and most or all of the interference would likely occur with the Pudding River due to the larger river width and depth and closer proximity). Well 3 (MARI 65739) was modeled at the stacked rate (2.04 cfs, or 916 gpm) at a distance of 970 feet for interference with Farmers/Sam Brown Creek. The stream depletion at 30 days was estimated using the Hunt 2003 model. Well 3 was not modeled against the Pudding River - due to the greater distance the interference would likely be less. The presence of low permeability Willamette Silt between the aquifer and the beds of the streams result in an inefficient connection between the aquifer and the streams. Therefore, the stream depletion at 30 days is likely to be << 25% in all cases.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													

(A) = Total Interf.													
(B) = 80 % Nat. Q													
(C) = 1 % Nat. Q													
(D) = (A) > (C)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
(E) = (A / B) x 100	%	%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

**Basis for impact evaluation:** \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

C4b. **690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.**

C5.  **If properly conditioned**, the surface water source(s) can be adequately protected from interference, and/or groundwater use under this permit can be regulated if it is found to substantially interfere with surface water:  
 i.  The permit should contain condition #(s) \_\_\_\_\_;  
 ii.  The permit should contain special condition(s) as indicated in "Remarks" below;

C6. **SW / GW Remarks and Conditions:** \_\_\_\_\_  
In the area surrounding the wells, about 80 feet of Willamette Silt overly the alluvium aquifer (Gannett and Caldwell, 1998). The Pudding River and other small streams are not completely incised through the Willamette Silt. In general, the silt has a low vertical hydraulic conductivity that will lower the efficiency the interchange of water between these streams and the alluvial aquifer.

**References Used:** \_\_\_\_\_  
 Application file: G-18321, and nearby G-15815, G-16061, and G-17965.

Conlon, Terrence D., Wozniak, Karl C., Woodcock, Douglas, Herrera, Nora B., Fisher, Bruce J., Morgan, David S., Lee, Karl K., and Hinkle, Stephen R., 2005, Ground-Water Hydrology of the Willamette Basin, Oregon: U.S. Geological Survey Scientific Investigations Report 2005-5168.

Gannett, Marshall W., and Caldwell, Rodney R., 1998, Geologic Framework of the Willamette Lowland Aquifer System, Oregon and Washington: U. S. Geological Survey Professional Paper 1424-A.

Hunt, B., 2003, Unsteady stream depletion when pumping from semiconfined aquifer: Journal of Hydrologic Engineering, January/February, 2003.

Woodward, Dennis BG., Gannett, Marshall W., and Vaccaro, John J., 1998 Hydrogeologic Framework of the Willamette Lowland Aquifer System, Oregon and Washington: U. S. Geological Survey Professional Paper 1424-B.

Nearby well logs and water level data, specifically: MARI 2068, MARI 2105, MARI 65739, MARI 18439, MARI 2666, and MARI 3054.



**D. WELL CONSTRUCTION, OAR 690-200**

D1. Well #: 1, 2 Logid: MARI 2068 , MARI 2105

D2. **THE WELL does not appear to meet current well construction standards based upon:**

- a.  review of the well log;
- b.  field inspection by \_\_\_\_\_;
- c.  report of CWRE \_\_\_\_\_;
- d.  other: (specify) \_\_\_\_\_

D3. **THE WELL construction deficiency or other comment is described as follows:**

Well 1 (MARI 2068): the gravel feed 6" casing inside the 16" casing is confusing, Well Construction and Compliance should examine the log.


Well 2 (MARI 2105): Puddled Clay was used as seal, this is not to code.

D4.  **Route to the Well Construction and Compliance Section for a review of existing well construction.**

**Water Availability Tables**


DETAILED REPORT ON THE WATER AVAILABILITY CALCULATION						
watershed ID #: 151 Time: 10:10 AM		PUDDING R > MOLALLA R - AB MILL CR Basin: WILLAMETTE			Exceedance Level: 80 Date: 11/14/2016	
Month	Natural Stream Flow	Consumptive Use and Storage	Expected Stream Flow	Reserved Stream Flow	Instream Requirements	Net water Available
Monthly values are in cfs. Storage is the annual amount at 50% exceedance in ac-ft.						
JAN	1,040.00	123.00	917.00	0.00	36.00	881.00
FEB	1,180.00	113.00	1,070.00	0.00	36.00	1,030.00
MAR	1,010.00	78.30	932.00	0.00	36.00	896.00
APR	787.00	54.20	733.00	0.00	36.00	697.00
MAY	425.00	51.70	373.00	0.00	36.00	337.00
JUN	224.00	72.90	151.00	0.00	36.00	115.00
JUL	109.00	113.00	-4.01	0.00	36.00	-40.00
AUG	71.00	93.30	-22.30	0.00	36.00	-58.30
SEP	67.30	54.50	12.80	0.00	36.00	-23.20
OCT	91.60	14.00	77.60	0.00	36.00	41.60
NOV	363.00	48.00	315.00	0.00	36.00	279.00
DEC	957.00	117.00	840.00	0.00	36.00	804.00
ANN	706,000	56,400	650,000	0	26,100	626,000

**Water-Level Trends in Nearby Wells**

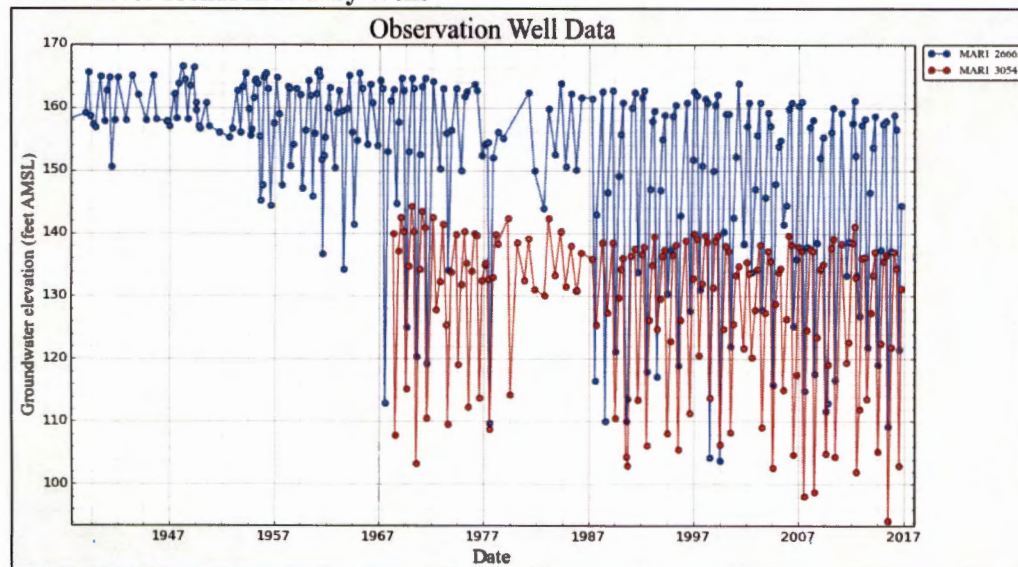




Well Location Map

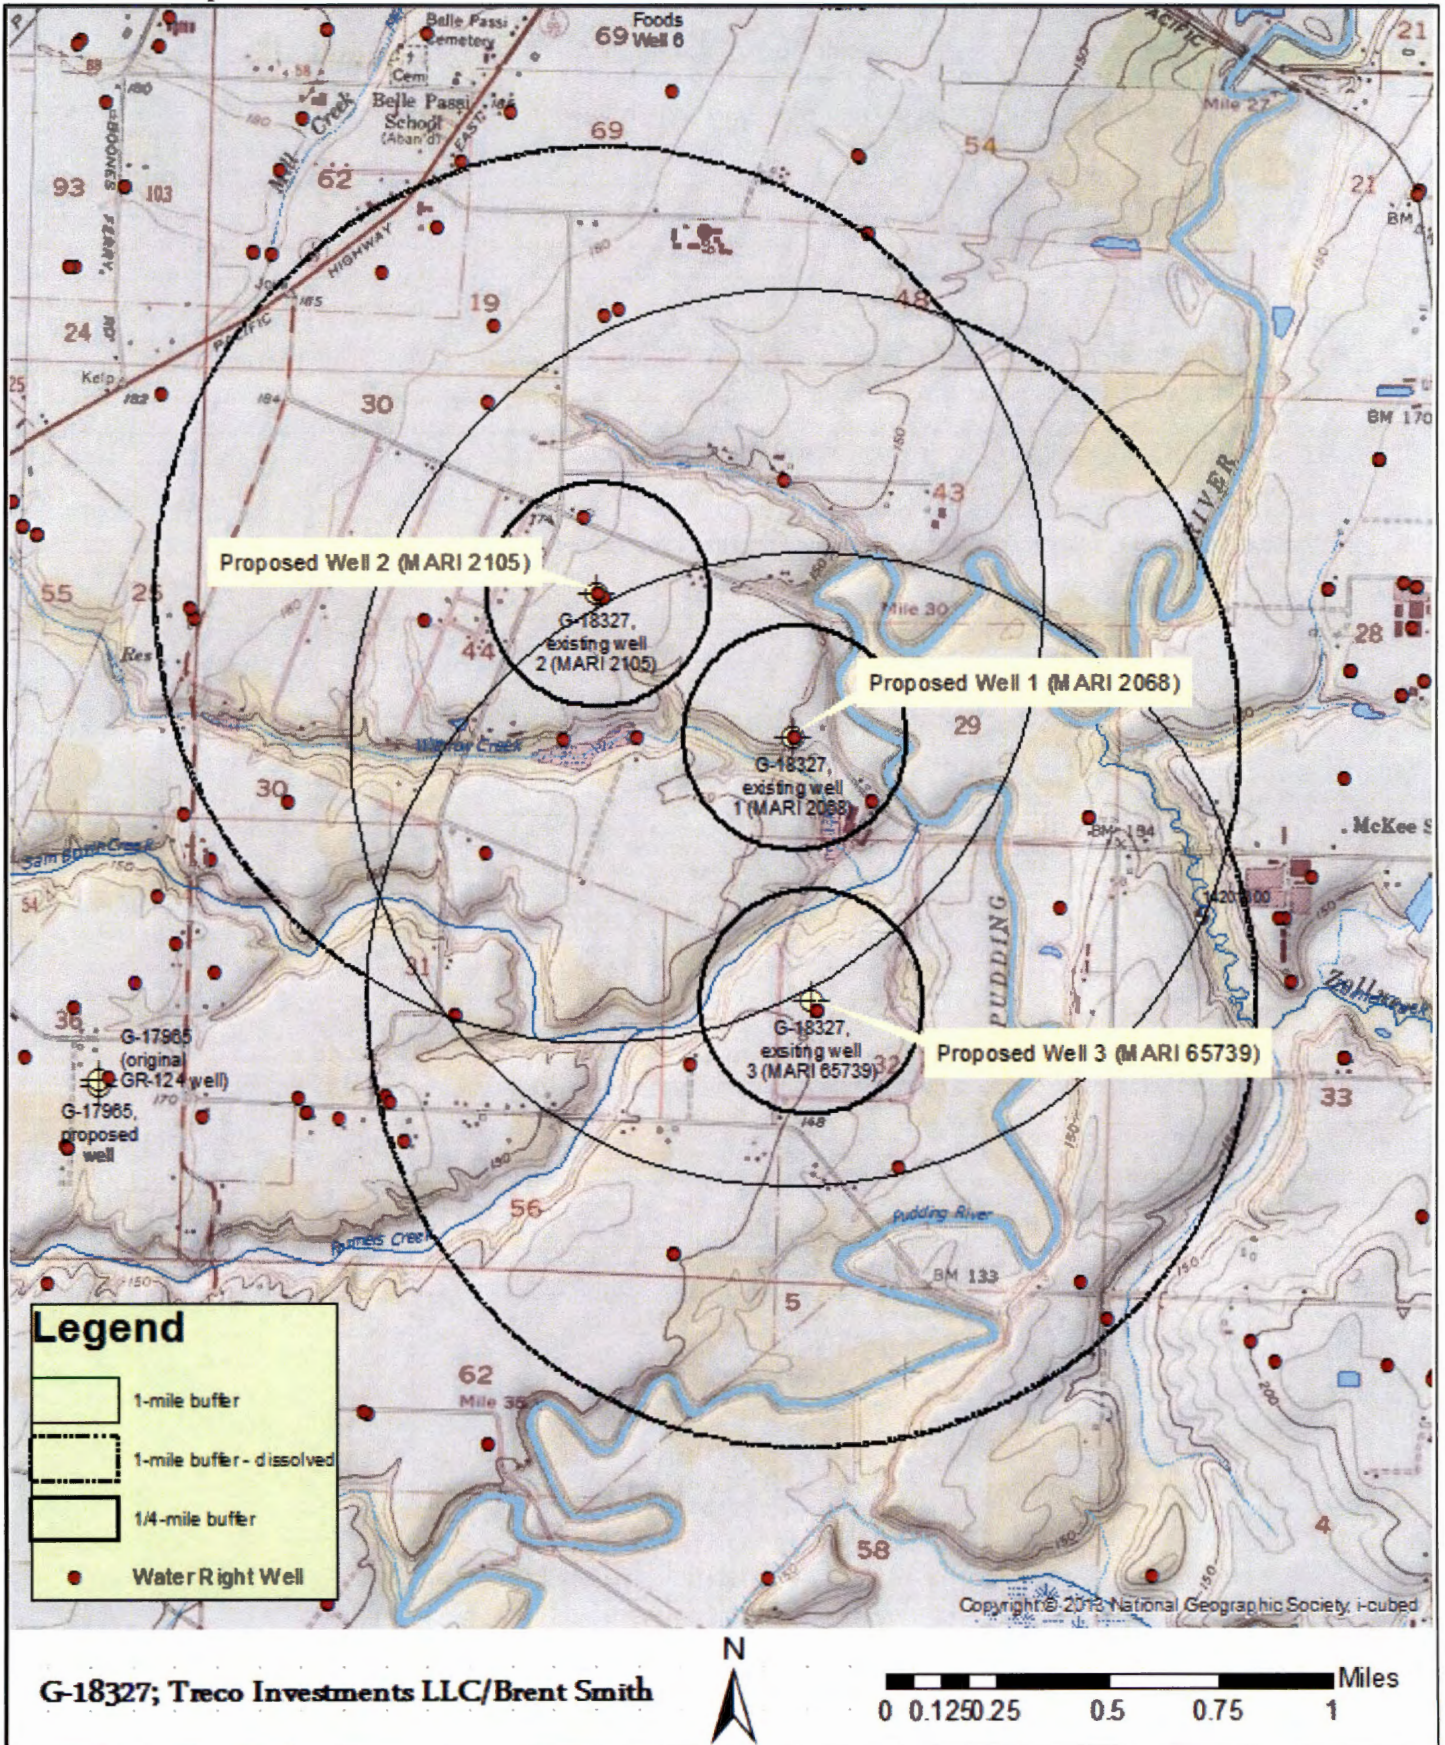




Stream Depletion Model Result

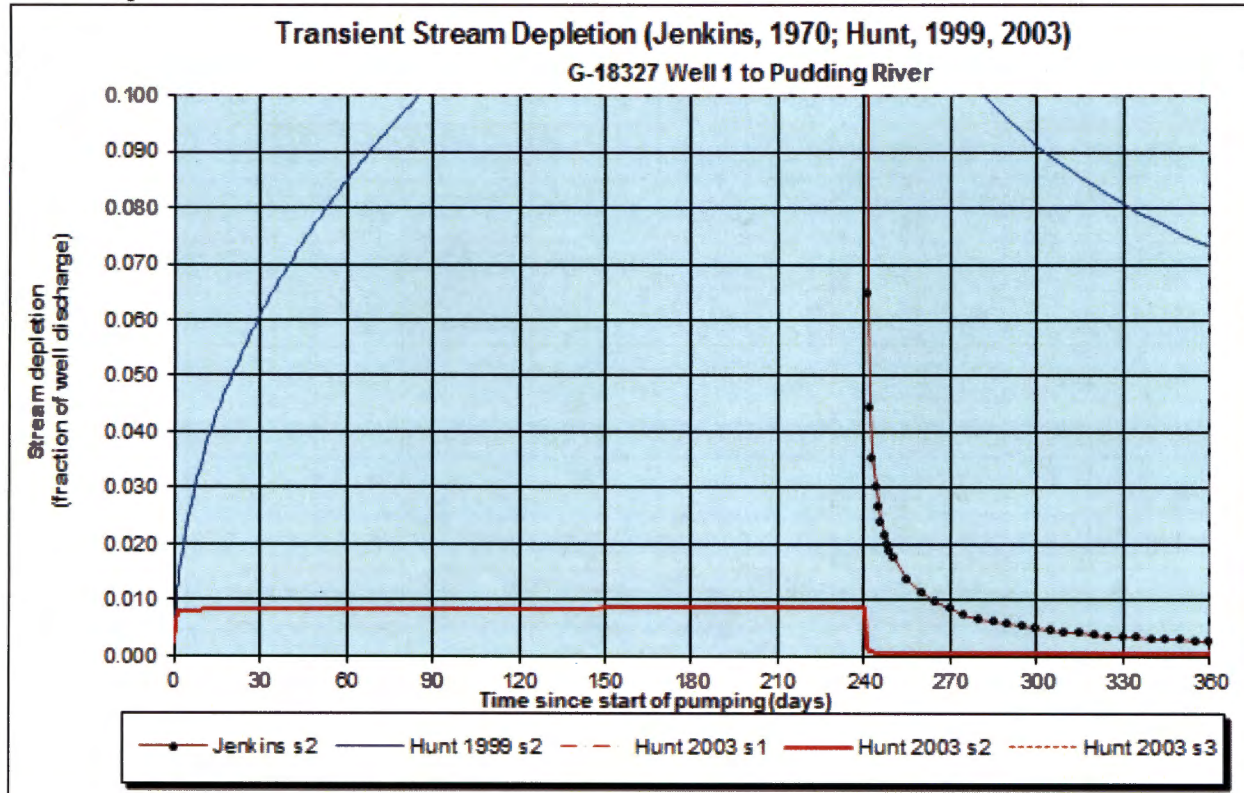

Output for Stream Depletion, Scenerio 2 (s2):						Time pump on (pumping duration) = 240 days						
Days	30	60	90	120	150	180	210	240	270	300	330	360
J SD	98.7%	99.1%	99.3%	99.4%	99.4%	99.5%	99.5%	99.6%	0.8%	0.5%	0.3%	0.3%
H SD 1999	6.1%	8.5%	10.3%	11.7%	13.0%	14.1%	15.1%	16.0%	10.7%	9.1%	8.1%	7.3%
H SD 2003	0.82%	0.83%	0.84%	0.85%	0.86%	0.87%	0.88%	0.88%	0.07%	0.07%	0.07%	0.07%
Qw, cfs	2.890	2.890	2.890	2.890	2.890	2.890	2.890	2.890	2.890	2.890	2.890	2.890
H SD 99, cfs	0.176	0.245	0.297	0.339	0.375	0.407	0.435	0.462	0.310	0.263	0.233	0.211
H SD 03, cfs	0.024	0.024	0.024	0.025	0.025	0.025	0.025	0.026	0.002	0.002	0.002	0.002

Parameters:		Scenario 1	Scenario 2	Scenario 3	Units
Net steady pumping rate of well	Qw	1297.00	1297.00	1297.00	gpm
Time pump on (pumping duration)	tpon	240	240	240	days
Perpendicular from well to stream	a	725	725	725	ft
Well depth	d	363	363	363	ft
Aquifer hydraulic conductivity	K	50	50	50	ft/day
Aquifer saturated thickness	b	70	70	70	ft
Aquifer transmissivity	T	3500	3500	3500	ft*ft/day
Aquifer storativity or specific yield	S	0.0001	0.0001	0.0001	
Aquitard vertical hydraulic conductivity	Kva	0.01	0.01	0.01	ft/day
Aquitard saturated thickness	ba	80	80	80	ft
Aquitard thickness below stream	babs	40	40	40	ft
Aquitard porosity	n	0.2	0.2	0.2	
Stream width	ws	50	50	50	ft
Streambed conductance (lambda)	sbc	0.012500	0.012500	0.012500	ft/day
Stream depletion factor	sdf	0.015018	0.015018	0.015018	days
Streambed factor	sbf	0.002589	0.002589	0.002589	
input #1 for Hunt's Q_4 function	t'	66.587396	66.587396	66.587396	
input #2 for Hunt's Q_4 function	K'	0.018772	0.018772	0.018772	
input #3 for Hunt's Q_4 function	epsilon'	0.000500	0.000500	0.000500	
input #4 for Hunt's Q_4 function	lamda'	0.002589	0.002589	0.002589	




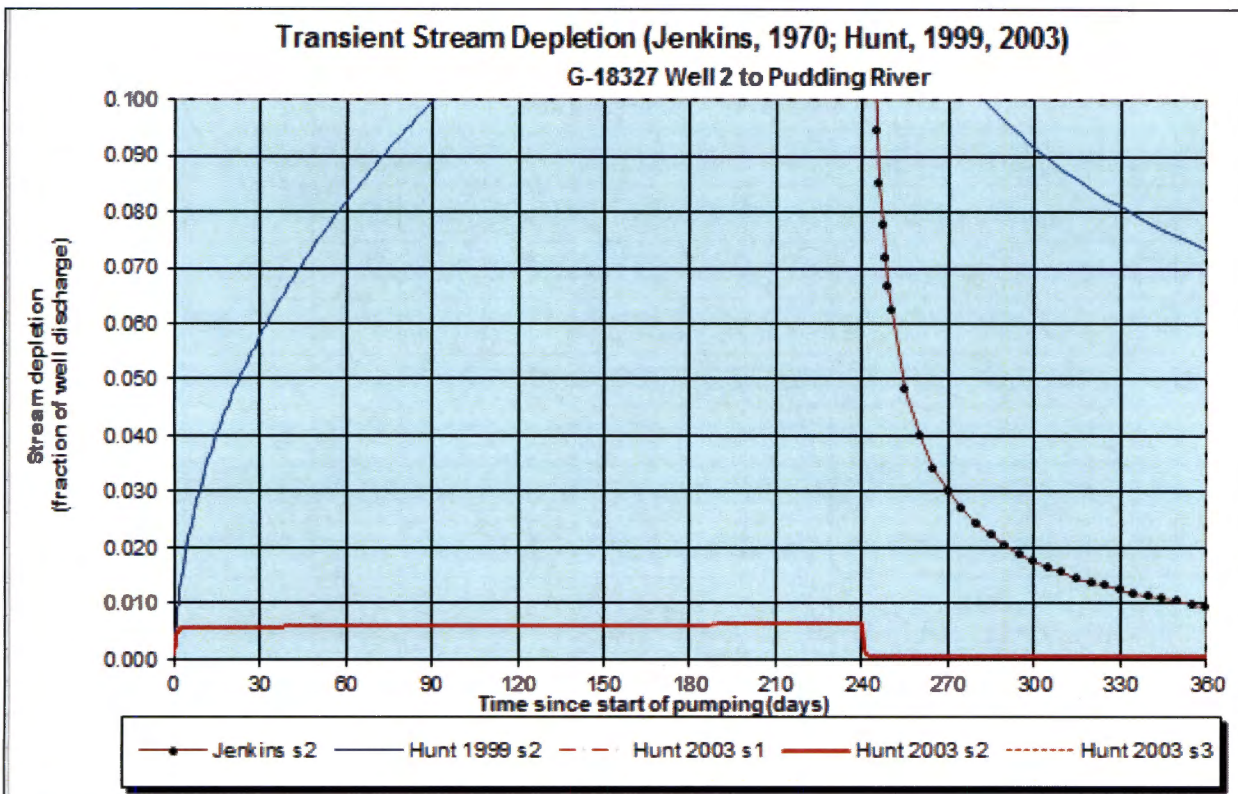

Output for Stream Depletion, Scenerio 2 (s2):						Time pump on (pumping duration) = 240 days						
Days	30	60	90	120	150	180	210	240	270	300	330	360
J SD	95.5%	96.8%	97.4%	97.7%	98.0%	98.2%	98.3%	98.4%	3.0%	1.8%	1.2%	1.0%
H SD 1999	5.8%	8.2%	10.0%	11.4%	12.7%	13.8%	14.8%	15.7%	10.8%	9.1%	8.1%	7.3%
H SD 2003	0.58%	0.59%	0.60%	0.60%	0.61%	0.62%	0.63%	0.64%	0.06%	0.06%	0.06%	0.06%
Qw, cfs	2.821	2.821	2.821	2.821	2.821	2.821	2.821	2.821	2.821	2.821	2.821	2.821
H SD 99, cfs	0.163	0.231	0.281	0.322	0.358	0.389	0.417	0.443	0.304	0.258	0.229	0.207
H SD 03, cfs	0.016	0.017	0.017	0.017	0.017	0.017	0.018	0.018	0.002	0.002	0.002	0.002

Parameters:		Scenario 1	Scenario 2	Scenario 3	Units
Net steady pumping rate of well	Qw	1266.00	1266.00	1266.00	gpm
Time pump on (pumping duration)	tpon	240	240	240	days
Perpendicular from well to stream	a	2595	2595	2595	ft
Well depth	d	140	140	140	ft
Aquifer hydraulic conductivity	K	50	50	50	ft/day
Aquifer saturated thickness	b	70	70	70	ft
Aquifer transmissivity	T	3500	3500	3500	ft <sup>2</sup> /day
Aquifer storativity or specific yield	S	0.0001	0.0001	0.0001	
Aquitard vertical hydraulic conductivity	Kva	0.01	0.01	0.01	ft/day
Aquitard saturated thickness	ba	80	80	80	ft
Aquitard thickness below stream	babs	40	40	40	ft
Aquitard porosity	n	0.2	0.2	0.2	
Stream width	ws	50	50	50	ft
Streambed conductance (lambda)	sbc	0.012500	0.012500	0.012500	ft/day
Stream depletion factor	sdf	0.192401	0.192401	0.192401	days
Streambed factor	sbf	0.009268	0.009268	0.009268	
input #1 for Hunt's Q_4 function	t'	5.197486	5.197486	5.197486	
input #2 for Hunt's Q_4 function	K'	0.240501	0.240501	0.240501	
input #3 for Hunt's Q_4 function	epsilon'	0.000500	0.000500	0.000500	
input #4 for Hunt's Q_4 function	lamda'	0.009268	0.009268	0.009268	



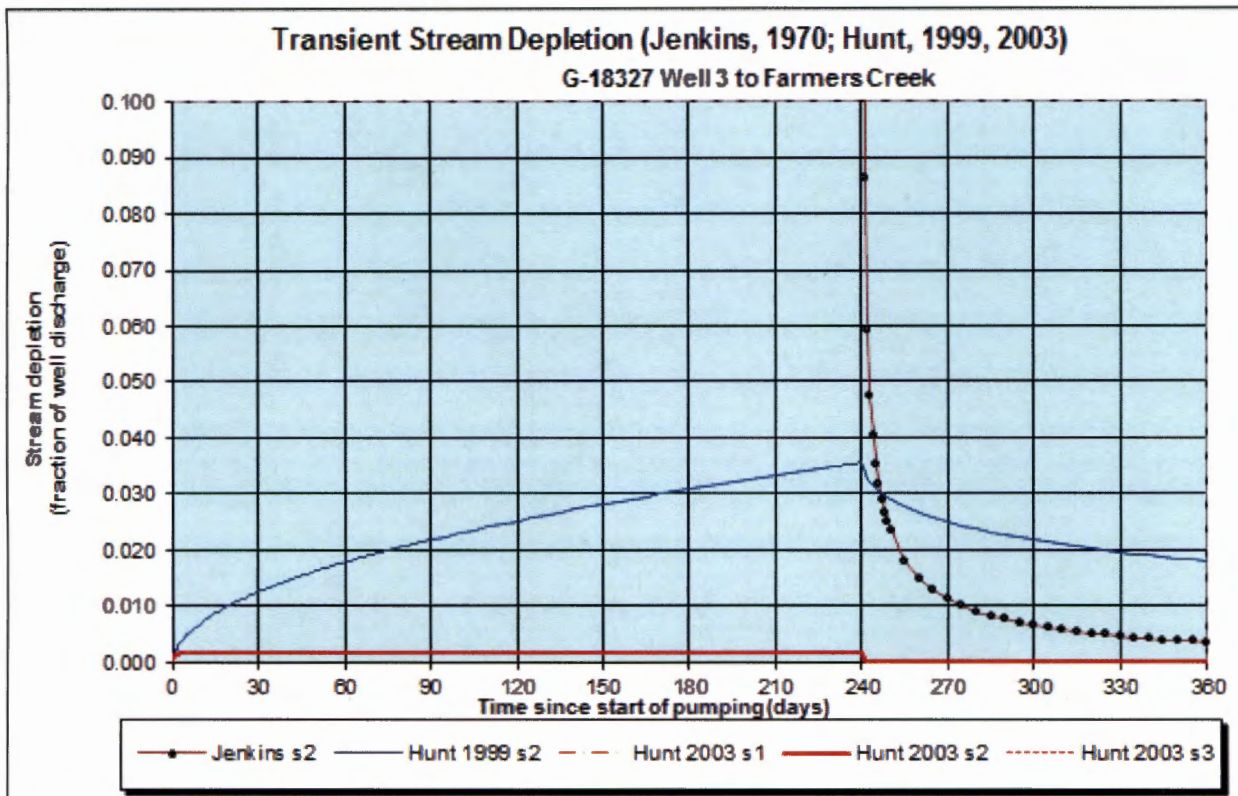

Output for Stream Depletion, Scenerio 2 (s2):						Time pump on (pumping duration) = 240 days						
Days	30	60	90	120	150	180	210	240	270	300	330	360
J SD	98.3%	98.8%	99.0%	99.2%	99.2%	99.3%	99.4%	99.4%	1.1%	0.7%	0.5%	0.4%
H SD 1999	1.3%	1.8%	2.2%	2.5%	2.8%	3.1%	3.3%	3.6%	2.5%	2.2%	2.0%	1.8%
H SD 2003	0.16%	0.16%	0.16%	0.16%	0.17%	0.17%	0.17%	0.17%	0.01%	0.01%	0.01%	0.01%
Qw, cfs	2.041	2.041	2.041	2.041	2.041	2.041	2.041	2.041	2.041	2.041	2.041	2.041
H SD 99, cfs	0.026	0.036	0.045	0.052	0.058	0.063	0.068	0.073	0.051	0.044	0.040	0.037
H SD 03, cfs	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.000	0.000	0.000	0.000

Parameters:		Scenario 1	Scenario 2	Scenario 3	Units
Net steady pumping rate of well	Qw	916.00	916.00	916.00	gpm
Time pump on (pumping duration)	tpon	240	240	240	days
Perpendicular from well to stream	a	970	970	970	ft
Well depth	d	299	299	299	ft
Aquifer hydraulic conductivity	K	50	50	50	ft/day
Aquifer saturated thickness	b	70	70	70	ft
Aquifer transmissivity	T	3500	3500	3500	ft <sup>2</sup> /day
Aquifer storativity or specific yield	S	0.0001	0.0001	0.0001	
Aquitard vertical hydraulic conductivity	Kva	0.01	0.01	0.01	ft/day
Aquitard saturated thickness	ba	80	80	80	ft
Aquitard thickness below stream	babs	40	40	40	ft
Aquitard porosity	n	0.2	0.2	0.2	
Stream width	ws	10	10	10	ft
Streambed conductance (lambda)	sbc	0.002500	0.002500	0.002500	ft/day
Stream depletion factor	sdf	0.026883	0.026883	0.026883	days
Streambed factor	sbf	0.000693	0.000693	0.000693	
input #1 for Hunt's Q_4 function	t'	37.198427	37.198427	37.198427	
input #2 for Hunt's Q_4 function	K'	0.033604	0.033604	0.033604	
input #3 for Hunt's Q_4 function	epsilon'	0.000500	0.000500	0.000500	
input #4 for Hunt's Q_4 function	lamda'	0.000693	0.000693	0.000693	