Groundwater Application Review Summary Form

Application # G- 18757 Re-review
GW Reviewer Bon Scandella, Jen Whody Date Review Completed: 10/18/12019
Summary of GW Availability and Injury Review:
[] Groundwater for the proposed use is either over appropriated, will not likely be available in the amounts requested without injury to prior water rights, OR will not likely be available within the capacity of the groundwater resource per Section B of the attached review form.
Summary of Potential for Substantial Interference Review:
[] There is the potential for substantial interference per Section C of the attached review form.
Summary of Well Construction Assessment:
The well does not appear to meet current well construction standards per Section D of the attached review form. Route through Well Construction and Compliance Section.
> see well memo from original ges reviews
This is only a summary. Documentation is attached and should be read thoroughly to understand the

This is only a summary. Documentation is attached and should be read thoroughly to understand the basis for determinations and for conditions that may be necessary for a permit (if one is issued).

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO:			r Rights Sec									18/2019	9		
FROM:		Groui	ndwater Sec	ction		В			dell	a, Jen Woo	dy				
SUBJE	CT.	A nn1;	action C 19	0757		Cuma		ver's Name	of	2/22/2010					
SUDJE	CI.	Аррп	cation G-18	0/3/		Supe	rsede	s review	OI .	3/22/2019		D	ate of Revi	ew(s)	
DIDI		DEG	CDDECIM	ADTION (SDOUNI		TED								
			FPRESUN The Departm						vata	er usa will an	sura tha	neacae	vation of	the nubl	ia
			th as describ												
			e presumptio												
			. This reviev												
A. GEN	ERAL IN	FOR	MATION:	App	olicant's N	Vame:	<u>TOU</u>	CHMAR	K I	HEIGHTS I	LLC	Cour	nty: WAS	SHINGT	ON
A1.			ek(s) 0.134		,		ND fro	m	1	1		well(s)	in the W	illamette	Basin,
	subbasin														
A2.			AGRICULTU						gric.	culture uses:	JANUA	ARY 1 T	THROUG	GH	
A3.	Well and	aquif	er data (atta	ch and num	ber logs f	for ex	isting	wells; m	ark	proposed v	vells as	such ur	nder logi	d):	
	Logid Applicant's Well #						D	,		T		Location, metes and bounds,			
Well				Propos	Proposed Aquifer*			posed e(cfs)		Location (T/R-S QQ-		e.g. 2250' N, 1200' E fr NW cor S			
			***************************************				run	5(015)					36	5	
1	WASH		8638	Volcanic	/Volcaniclas	stic	0.	134		1S/1W-1 NE-	NW	392	2'S, 377'W	fr N cor S	1
* Alluviu	ım, CRB, B	sedrock	K												
	Well	Firs	st SWL	SWL	Well	S	eal	Casing	,	Liner	Perfor	ations	Well	Draw	Tost
Well	Elev	Wate	er ft bls	Date	Depth		erval	Interval	s	Intervals	Or Sc		Yield	Down	
1	ft msl	ft bl	382	Aug. 1951	(ft) 402	-	ft) nown	(ft) 0-116	-	(ft) N/A	(f N/		(gpm) 60	(ft) 0	1000
		know													know
Use data	from applie	cation	for proposed v	wells											n
USE data	пош арри	cation	ioi proposed v	wells.											
A4.			he applicant												
	-		plication sug			_						analys	is sugges	ts that the	e well
	is comple	eted in	to the Quate	rnary-Late	Certiary V	olcani	ic and	Volcanic	last	ic Aquifer S	<u>ystem.</u>				
A5. 🛛	Provisio	ns of	the Willame	ette				Racin	rule	s relative to	the deve	olonmer	nt classif	ication a	nd/or
715.			f groundwate		illy conne	cted to	o surfa	ce water	П	are, or \boxtimes	are not.	activate	ed by this	applicat	ion.
	(Not all b	oasin r	ules contain	such provisi	ions.)										
	Commen	ts: <u>69</u>	0-502-0240	classifies us	e from un	confi	ned all	uvial aqu	ifer	s within 1/4 n	nile of a	stream	or surfac	e water s	ource.
			surface wate						h is	ephemeral a	and does	not hav	ve any sp	<u>ecial</u>	
	classifica	ition ir	n 690-502-13	30 for the Ti	ialatin Riv	er Su	bbasir	<u>l.</u>							
A6. 🗌	Wall(a) #	4							000	a) am aguifam	limited	h v. om o	daniaistus	tiva maata	
А0. 🔲	Name of	admir	nistrative are	a. , _	,			, ι	ap(s	s) an aquiter	mmtea	by an a	ammistra	mve resu	iction.
	Commen														
															D-140 meet ation. FON Basin, Test Type Unknow n

Application G-18757 Date: 10/18/2019 Page 2

B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

В1.	Bas	ed upon available data, I have determined that groundwater of the proposed use.
	a.	is over appropriated, is not over appropriated, or is cannot be determined to be over appropriated during any period of the proposed use. * This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
	b.	will not or will likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
	c.	\square will not or \square will likely to be available within the capacity of the groundwater resource; or
	d.	will, if properly conditioned, avoid injury to existing groundwater rights or to the groundwater resource: i. The permit should contain condition #(s) 7N (Annual Measurement), Large Water Use Reporting ii. The permit should be conditioned as indicated in item 2 below. iii. The permit should contain special condition(s) as indicated in item 3 below;
B2.	a.	Condition to allow groundwater production from no deeper than ft. below land surface;
	b.	Condition to allow groundwater production from no shallower than ft. below land surface;
	c.	Condition to allow groundwater production only from the groundwater reservoir between approximately ft. and ft. below land surface;
	d.	■ Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.
		Describe injury –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc):

B3. Groundwater availability remarks:

The applicant's proposed well is located on the west slope of the Tualatin Mountains, which consist primarily of uplifted Columbia River Basalts. Overlying the basalts on the west slope are undifferentiated Valley Fill sediments and a discontinuous surficial layer of Boring Lava (Conlon, 2005; Hart and Newcomb, 1965; Woodward *et al.*, 1998). Each of these hydrogeologic units appear on nearby well logs, and mapped faulting in the region juxtaposes these hydrogeologic units and may provide vertical connectivity between them. This varied lithology suggests that the aquifer system accessed by the well is the Quaternary-Late Tertiary Volcanic and Volcaniclastic (QLTV) Aquifer System.

In the original GW review, the QLTV Aquifer System was found to be connected with the Columbia River Basalt Group (CRBG) Aquifer System based on coincidence of water levels between WASH 8638 and MULT 901. Given the best available information at that time, water levels over 200 feet higher in MULT 901 in the 1970s and 1980s indicated excessive declines, such that further extraction would have been beyond the capacity of the aquifer. A field visit and measurements collected by OWRD staff on 10/11/2019 suggested that the high water levels originally reported in MULT 901 were likely measured in a different well. Therefore, the subject well and MULT 901 show a relatively stable water level trend over the period of record. Recent divergence of water levels in MULT 901 and WASH 89 suggest that those wells access different aquifers. Considering this more recent information, the original finding, that water is not available within capacity of the resource, was reversed. The lack of water level data in the QLTV in the vicinity of WASH 8638 warrants including the permit conditions indicated in section B1di above to monitor the resource and protect existing users.

Date: 10/18/2019

C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. **690-09-040** (1): Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Volcanic/Volcaniclastic aquifer		\boxtimes

Basis for aquifer confinement evaluation: Nearly all of the wells in this area show water levels below or coincident with the top of the water-bearing zone, indicating that the aquifer is not confined.

C2. **690-09-040** (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)		Conne	ulically ected? ASSUMED	Potentia Subst. In Assum YES	terfer.
1	1	Johnson Creek	470	360	8200	\boxtimes				\boxtimes

Basis for aquifer hydraulic connection evaluation: The nearest perennial stream reach is Johnson Creek, more than 1.5 miles away. Due to the distance and low hydraulic conductivity of the alluvial aquifer system in this area, it is possible that WASH 8638 is hydraulically connected with Johnson creek despite the 110' difference in water elevations. There is a surface water POD about 800' to the SE, but this uses winter run off in ephemeral Golf Creek to fill 4 reservoirs. Golf Creek is presumed to be dry during the irrigation season.

Water Availability Basin the well(s) are located within: ROCK CR > TUALATIN R - AT MOUTH (WID 73545), FANNO CR > TUALATIN R - AT MOUTH (WID 73543)

C3a. **690-09-040** (4): Evaluation of stream impacts for <u>each well</u> that has been determined or assumed to be **hydraulically** connected and less than 1 mile from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% *natural* flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < 1/4 mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be hydraulically connected and less than 1 mile from a surface water source. Complete only if Q is distributed among wells. Otherwise same evaluation and limitations apply as in C3a above.

evaluation and i	mitations appry	as III C	sa above.								
SW #		v > .	nstream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?		
Comments: N/	omments: N/A										

Comments: N/A		<u></u>	

C4a. **690-09-040 (5):** Estimated impacts on hydraulically connected surface water sources greater than one mile as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

	stributed												-
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Well Q	as CFS												
Interfere	nce CFS												
Distrib	uted Well	S						274 T	y 267				
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Well Q	as CFS												
Interfere	nce CFS												
(A) = Tot	tal Interf.												
(B) = 80	% Nat. Q	105	141	115	60	23	12.3	2.58	2.72	3.68	4.57	4.02	47.4
(C) = 1	% Nat. Q	1.050	1.410	1.150	0.600	0.230	0.123	0.026	0.027	0.037	0.046	0.040	0.474
$(\mathbf{D}) = (\mathbf{D})$	A) > (C)												
$(\mathbf{E}) = (\mathbf{A} / \mathbf{A})$	B) x 100	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

Basis for impact evaluation: Depletion of Johnson Creek was modeled using the Hunt (1999) analytical stream depletion model assuming constant pumping at the maximum rate and using published aquifer parameter ranges (see screenshot of model results below) (Conlon, 2005). The stream depletion values are not indicated in the table above due to the large range of plausible results, but under the most likely parameter values (Scenario 2), stream depletion remains well below 1% of the 80% natural flow in all months so that PSI is not triggered per OAR 690-009-0040.

C4b. 690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.

25. If properly conditioned, the surface water source(s) can be adequately protected from interference, and/or groundwater use	
under this permit can be regulated if it is found to substantially interfere with surface water:	
i. The permit should contain condition #(s)	.;
ii. The permit should contain special condition(s) as indicated in "Remarks" below;	

References Used:

- Conlon, T.D., 2005. Ground-Water Hydrology of the Willamette Basin, Oregon. Reston, Va.: U.S. Dept. of the Interior, U.S. Geological Survey. http://purl.access.gpo.gov/GPO/LPS100769. Accessed 7 Jun 2018.
- Hart, D.H. and R.C. Newcomb, 1965. Geology and Ground Water of the Tualatin Valley, Oregon. USGS Numbered Series, U.S. G.P.O.,. http://pubs.er.usgs.gov/publication/wsp1697. Accessed 26 Feb 2019.
- Hunt, B., 1999. Unsteady Stream Depletion from Ground Water Pumping. Groundwater 37:98–102.
- Woodward, D.G., M.W. Gannett, and J.J. Vaccaro, 1998. Hydrogeologic Framework of the Willamette Lowland Aquifer System, Oregon and Washington. U.S. G.P.O.; For sale by U.S. Geological Survey, Information Services, Washington: Denver, CO.

Date: 10/18/2019 Page

D. WELL CONSTRUCTION, OAR 690-200

D1.	V	Vell #:	1	Logid: <u>WASH 8638</u>	
D2.		. X . D	review of field ins report of	s not appear to meet current well construction standards based upon: the well log; ection by CWRE ecify)	;
D3.	a	vailable	e in the C	struction deficiency or other comment is described as follows: The well log for WASH 8638 that is WRD Well Log database does not specify any seal. In order to meet current well constructions standard to be reconstructed or inspected to confirm the presence of a seal.	
D4.	<u> </u>	Route t	to the W	ll Construction and Compliance Section for a review of existing well construction.	

Figure 1: Water Availability Tables

		DETAILED REPORT	ON THE WATER AVAILA	BILITY CALCULATIO	N .	
Watershed ID #: Time: 2:29 PM	73545	ROCK	CR > TUALATIN R - A Basin: WILLAMET			lance Level: 80 ate: 02/26/2019
Month	Natural Stream Flow	Consumptive Use and Storage	Expected Stream Flow	Reserved Stream Flow	Instream Requirements	Net Water Available
		Storage is 1	Monthly values a the annual amount at	re in cfs. 50% exceedance i	in ac-ft.	
JAN FEB MAR APR MAY JUN JUL AUG SEP OCT NOV DEC ANN	105.00 141.00 115.00 60.10 23.80 12.30 2.58 2.72 3.68 4.57 4.02 47.40 81,500	1.31 1.62 0.91 0.73 2.84 3.52 4.93 4.22 2.21 0.23 0.48 1.31 1,470	104.00 139.00 114.00 59.40 21.00 8.78 -2.35 -1.50 1.47 4.34 3.54 46.10 80,100	0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0	2.50 2.50 2.50 2.50 2.50 2.50 2.50 2.50	101.00 137.00 112.00 56.90 18.50 6.28 -4.85 -4.00 -1.03 1.84 1.04 43.60 78,400

Watershed ID #: Time: 2:30 PM	73543 FANNO CR > TUALATIN R - AT MOUTH Basin: WILLAMETTE				Exceedance Level: 80 Date: 02/26/2019		
Month	Natural Stream Flow	Consumptive Use and Storage			Instream Requirements	Net Water Available	
		Storage is t	Monthly values a he annual amount a		n ac-ft.		
JAN FEB MAR APR MAY	49.50 55.80 44.30 26.30 13.20	28.50 28.50 28.40 28.40 29.30	21.00 27.30 15.90 -2.07 -16.10	0.00 0.00 0.00 0.00 0.00	2.50 2.50 2.50 2.50 2.50	18.50 24.80 13.40 -4.57 -18.60	
1717	13.20	25.50	10.10	0.00	2.50	25.00	


DETAILED REPORT ON THE WATER AVAILABILITY CALCULATION

APR 26.30 28.40 -2.07 0.00 2.50 -4.57 MAY 13.20 29.30 -16.10 0.00 2.50 -18.60 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1	MAR	44.30	28.40	15.90	0.00	2.50	13.40
JUN 7.00 29.50 -22.50 0.00 2.50 -25.00 JUL 4.72 30.00 -25.30 0.00 2.50 -27.80 AUG 3.83 29.80 -25.90 0.00 2.50 -28.40 SEP 3.41 29.00 -25.60 0.00 2.50 -28.40 OCT 3.31 28.30 -25.00 0.00 2.50 -27.50 NOV 9.11 28.30 -19.20 0.00 2.50 -21.70	APR	26.30	28.40	-2.07	0.00	2.50	-4.57
JUL 4.72 30.00 -25.30 0.00 2.50 -27.80 AUG 3.83 29.80 -25.90 0.00 2.50 -28.40 SEP 3.41 29.00 -25.60 0.00 2.50 -28.10 OCT 3.31 28.30 -25.00 0.00 2.50 -27.50 NOV 9.11 28.30 -19.20 0.00 2.50 -21.70	MAY	13.20	29.30	-16.10	0.00	2.50	-18.60
AUG 3.83 29.80 -25.90 0.00 2.50 -28.40 SEP 3.41 29.00 -25.60 0.00 2.50 -28.10 OCT 3.31 28.30 -25.00 0.00 2.50 -27.50 NOV 9.11 28.30 -19.20 0.00 2.50 -21.70	JUN	7.00	29.50	-22.50	0.00	2.50	-25.00
SEP 3.41 29.00 -25.60 0.00 2.50 -28.10 OCT 3.31 28.30 -25.00 0.00 2.50 -27.50 NOV 9.11 28.30 -19.20 0.00 2.50 -21.70	JUL	4.72	30.00	-25.30	0.00	2.50	-27.80
OCT 3.31 28.30 -25.00 0.00 2.50 -27.50 NOV 9.11 28.30 -19.20 0.00 2.50 -21.70	AUG	3.83	29.80	-25.90	0.00	2.50	-28.40
NOV 9.11 28.30 -19.20 0.00 2.50 -21.70	SEP	3.41	29.00	-25.60	0.00	2.50	-28.10
	OCT	3.31	28.30	-25.00	0.00	2.50	-27.50
	NOV	9.11	28.30	-19.20	0.00	2.50	-21.70
DEC 32.90 28.50 4.44 0.00 2.50 1.94	DEC	32.90	28.50	4.44	0.00	2.50	1.94
ANN 30,300 20,900 17,100 0 1,810 16,300	ANN	30,300	20,900	17,100	0	1,810	16,300

Date: 10/18/2019

Figure 2: Well Location Map


G-18757 (Touchmark Heights LLC). T1S/R1W - S1

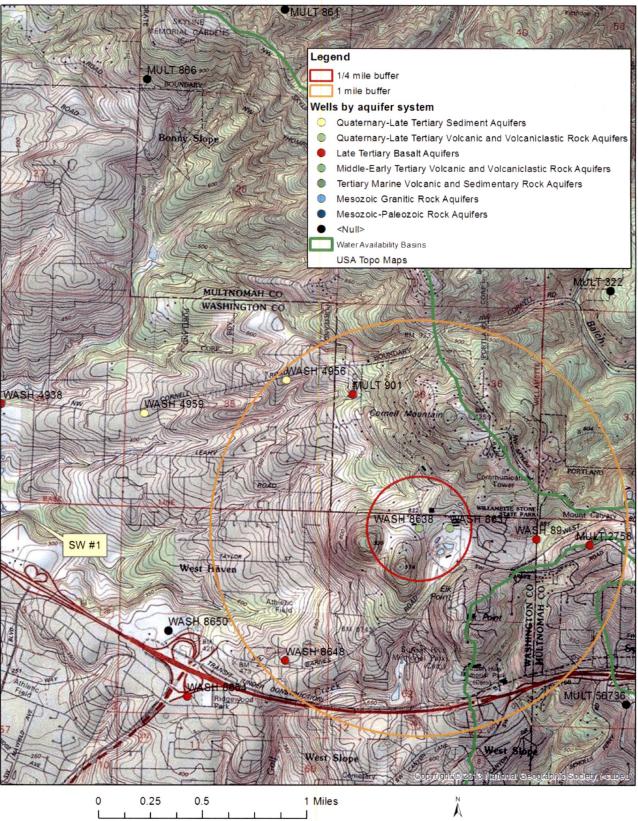

Application G-18757

Date: 10/18/2019

Figure 3: Hydrograph of Water Levels in Nearby Wells

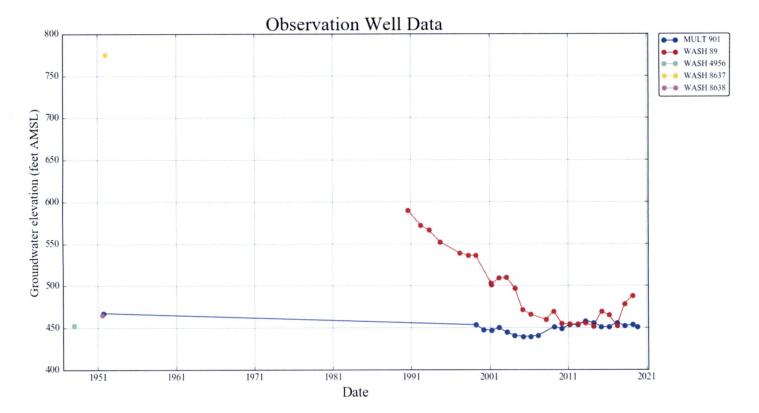

Date: 10/18/2019

Figure 4: Results of stream depletion modeling

Application type:	G
Application number:	18757
Well number:	1
Stream Number:	1
Pumping rate (cfs):	0.134
Pumping duration (days):	100.0
Pumping start month number (3=March)	3.0

Parameter	Symbol	Scenario 1	Scenario 2	Scenario 3	Units
Distance from well to stream	a	8200.0	8200.0	8200.0	ft
Aquifer transmissivity	T	100.0	1000.0	10000.0	ft2/day
Aquifer storativity	S	0.1	0.05	0.01	-
Aquitard vertical hydraulic conductivity	Kva	0.01	0.1	1.0	ft/day
Not used		20.0	20.0	20.0	
Aquitard thickness below stream	babs	5.0	3.0	1.0	ft
Not used		0.2	0.2	0.2	-
Stream width	ws	5.0	10.0	20.0	ft

Stream depletion for Scenario 2: Days 10 360 30 60 90 120 150 180 240 270 300 330 210 Depletion (%) 0 0 0 0 0 0 0 0 0 0 0 0 0 Depletion (cfs) 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00

