Groundwater Application Review Summary Form

Application # G- <u>18890</u>
GW Reviewer <u>Aurora C Bouchier</u> Date Review Completed: <u>May 13, 2020</u>
Summary of GW Availability and Injury Review:
Groundwater for the proposed use is either over appropriated, will not likely be available in the amounts requested without injury to prior water rights, OR will not likely be available within the capacity of the groundwater resource per Section B of the attached review form.
Summary of Potential for Substantial Interference Review:
There is the potential for substantial interference per Section C of the attached review form.
Summary of Well Construction Assessment:
☐ The well does not appear to meet current well construction standards per Section D of the attached review form. Route through Well Construction and Compliance Section.
This is only a summary. Documentation is attached and should be read thoroughly to understand the basis for determinations and for conditions that may be necessary for a permit (if one is issued).

Version: 03/36/2020

WATER RESOURCES DEPARTMENT

MEM	O						Ma	ny 13		, 20 <u>20</u>	<u>)</u>	
TO:		Applica	tion G	18890								
FRON	1:	GW:	Aurora Reviewer'		nier							
SUBJ	ECT: So	cenic Wa	aterway	Interfe	erence E	Evaluati	on					
	YES NO			of appropries	-	is hydra	ulically	connect	ed to a S	State Sce	enic	
	YES NO	Use	the Scer	nic Wate	erway Co	ondition	(Condit	ion 7J)				
	interfer	2S 390.8 ence with ence is d	h surface	e water t	hat cont				_			
	interfered Depart propos	S 390.8 ence wit ment is ed use in the fr	h surface unable i will me	e water t to find t asurabl	that cont t hat the ly redu	tributes tre is a p	to a scen reponde surface	ic water erance (water	way; th of evide	erefore, nce that	the the	
Calcula per crit the Dep Exerci	te the perceria in 390 artment is	ON OF II centage of 0.835, do i unable to	consumpt not fill in make a H	tive use by the table l Preponder	y month and but check cance of E reduce 1	the "unal Evidence fi nonthly	ole" option inding. flows in	above, ti	hus inforn	ning Wate Sceni	er Rights i	that
		the follow low is re	_	ounts ex	xpressec	as a pr	oportion	of the	consum	otive use	e by wh	ıch
Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec]

Version: 03/36/2020

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO: FROM			Rights Sec water Sec	etion tion			C Bouchie		te	May 13	, 2020		
SUBJE	CT:	Applica	ntion G- <u>18</u>	8890			wer's Name ersedes re	eview of <u>n</u>	a	Γ	Date of Revi	ew(s)	
OAR 69 welfare, to determent the pres	90-310-13 safety and mine whet umption c	0 (1) <i>The</i> d health her the priteria. T	e Departme as describe presumption	ed in ORS 5 n is establis v is based u	esume that 37.525. De hed. OAR apon availa	a proposed epartment s 690-310-1 able inform	d groundw staff review 40 allows mation an	vater use wild w groundwar the proposed d agency po (ayfield	ter appli d use be licies in	modified place at t	der OAR or conditi	690-310- ioned to r of evalua	-140 meet
A1.	Applican	t(s) seek	x(s) <u>1</u>	cfs from	_1	well(s) in the	Deschutes	3				Basin,
	W	hite Riv	er			subba	sin						
A2.	Proposed	use	Irriga	tion (75.7 F	PI, 4.2 SI)	Seaso	onality:	April 15 – Od	ctober 1	5			
A3.	Well and	aquifer	data (attac	h and num	ber logs fo	or existing	g wells; ma	ark propose	d wells	as such u	nder logi	d):	
Well	Logic	i	Applicant's Well #	Propose	ed Aquifer*	Propo Rate(Location (T/R-S QQ			n, metes ar , 1200' E f		
1 2								4S/13E-4 NW			S, 1400' E 1		
	ım, CRB, E	Bedrock											
Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft) Est 250	Seal Interval (ft) TBD	Casing Interval (ft) TBD			rforations r Screens (ft) TBD	Well Yield (gpm) 448	Draw Down (ft)	Test Type
A4.	Commerwell (WA layers where from WA Dalles For will likel well commerced to the POU states that indicates and 4.2 a acres in States 61 approved Certification	nts: *The ASC 197 ormation y not be pletion. of the angleony and POA that 79. cres sup Section 4. however, it appears to the appears of the angle of	7) described likely the I 7 is from the I 8 possible from I 9 acres of I	on states thes approximate Dalles Form the Dal	nately 95 feation (Water primation). To roposed we well. The ame Highline ion surfaced additional uthorized for 24525 could be 24525 autin Section of the map and water right ally connection.	et of uncorers, 1968). The well leed would be used a horizes irridate included up to 67 ht may be	Based or bas	alley Formativalley fill over the well consecutive from the well instruction of the well instruction of the well instruction of the well instruction for the water right from for this new for for this new formation of the water instead of the water wate	verlying nstruction s an estimate Dall spector version project into graph a 9-mile Certificate we ground Section 4 (the true relevant	more con on, it appears imated yie es Formati will be con to (which in roundwater elong ditchates 24525 andwater right 1, 0.6 acransfer appent portion available in the control of the con	solidated ars that the ld of 250 ion. The asulted on acludes r rights, a h). The a . This apght (75.7 res in Sec lication m of transfe for mitigation, classif	sediment the product gpm from requested all aspect In transfe pplication plication acres printion 3, an map legen or T-1330 tion by	tary tion n the d rate ets of eerring n mary d 64.4 d d is
A6. 🗆	Well(s) #	ŧ		GS Ground	,	, ,	, ta	ap(s) an aqui	fer limi	ted by an a	administra	ntive restr	riction.
	Commen	ts:	and to area										

Version: 03/36/2020

Application G-18890

Date: May 13, 2020

B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

Bas	ed upon available data, I have determined that groundwater* for the proposed use:
a.	is over appropriated, \square is not over appropriated, $or \boxtimes$ cannot be determined to be over appropriated during any period of the proposed use. * This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
b.	\square will not or \square will likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
c.	\square will not or \square will likely to be available within the capacity of the groundwater resource; or
d.	 will, if properly conditioned, avoid injury to existing groundwater rights or to the groundwater resource: i. ☐ The permit should contain condition #(s)7J, 7N, 7T ii. ☐ The permit should be conditioned as indicated in item 2 below. iii. ☐ The permit should contain special condition(s) as indicated in item 3 below;
a.	☐ Condition to allow groundwater production from no deeper than ft. below land surface;
b.	☐ Condition to allow groundwater production from no shallower than ft. below land surface;
c.	Condition to allow groundwater production only from the groundwater reservoir between approximately ft. and ft. below land surface;
d.	☐ Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.
	Describe injury —as related to water availability— that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc):
Gro	oundwater availability remarks:
	ley) has been monitored since the 1960's and shows no decline and a water-level coincident with nearby reaches of Tygh
	ek. Two nearby wells (WASC 51079, located to the northwest along the north flank of Tygh Valley and WASC 51079
	ated on the hillsides to the northeast) have water-level permit conditions. Water-level measurements from WASC 51079 relatively erratic, likely a response to pumping and restricted to a small locality. Aside from WASC 51079, the
	rograph for nearby wells indicates overall stable conditions at the current use.
	estimated yield listed on the nearby well logs range from 20 to 500 gpm. The applicant may need to amend the
<u>app</u>	lication to either add additional wells or reduce the requested rate.

C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. **690-09-040** (1): Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Tygh Valley Formation*	\boxtimes	

Basis for aquifer confinement evaluation: *Based on the location it appears that the well will be constructed into interbedded sandstones/claystones and lava flows of the Dalles Formation. The nearby well logs list the SWL above the first water-bearing zone, but not by a large amount. It may be more accurate to describe the aquifer as semiconfined.

C2. **690-09-040** (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Connected?			Potentia Subst. In Assum YES	terfer.
1	1	Tygh Creek	~1130	~1090- 1170	1060	×				×

Basis for aquifer hydraulic connection evaluation: The geologic maps suggest that a well at the proposed location will be completed into the Dalles Formation. Wells completed in Dalles Formation located within Tygh Valley or along the southern flank of the valley have water-levels which are coincident in elevation with nearby reaches of the surface waters. Wells completed in the Dalles Formation located on the hill slope to the north of the valley are generally located a larger distance above the valley floor and display water-levels ranging from approximately 10 to 60 feet in elevation above the surface water sources. The proposed POA is located right at the northern edge of the valley floor and will likely have an elevation slightly above to coincident with nearby surface waters.

Water Availability Basin the well(s) are located within: 70088: WHITE R > DESCHTUES R – AT MOUTH

C3a. **690-09-040** (4): Evaluation of stream impacts for <u>each well</u> that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water (SW) source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that SW source, not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% *natural* flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked ⋈ box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < 1/4 mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
1	1	\boxtimes		IS 70088	60		148		<<25 <i>%</i>	\boxtimes

C3b. **690-09-040 (4):** Evaluation of stream impacts <u>by total appropriation</u> for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

	SW #	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?

Comments: Interference at 30 days between the well and the surface water sources was estimated using the Hunt 2003 model. The low permeability layers below the stream bed result in an inefficient connection between the aquifer and the stream, therefore interference at 30 days should be less than 25%.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Di	istributed	Wells											
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q	as CFS												
Interfer	ence CFS												
Distail	uted Well	la.											
Well	SW#	is Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well C	as CFS		, -					, -	,,,	, ,			
	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q	as CFS												
	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q	as CFS												
Interfer	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q	as CFS												
Interfer	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q	as CFS												
Interfer	ence CFS												
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q	as CFS												
Interfer	ence CFS												
(A) - To	otal Interf.												
	% Nat. Q												
(C) = 1	% Nat. Q												
(D) = ((A) > (C)	√	√	√	√	√	√	√	√	√	✓	✓	√
(E) = (A	/ B) x 100	%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

Version: 05/07/2018

C4b. 690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.
C5. If properly conditioned , the surface water source(s) can be adequately protected from interference, and/or groundwater use under this permit can be regulated if it is found to substantially interfere with surface water:
i. The permit should contain condition #(s) 7J
ii. The permit should contain special condition(s) as indicated in "Remarks" below;
CC CHILDREN I I C III
The White River is likely a regional sink.
The White River is likely a regional sink. References Used:
The White River is likely a regional sink.
The White River is likely a regional sink. References Used: Application files: G-18888 and groundwater reviews for nearby applications G-16891 G-16956, G-17852 and G-18295.
The White River is likely a regional sink. References Used:
The White River is likely a regional sink. References Used: Application files: G-18888 and groundwater reviews for nearby applications G-16891 G-16956, G-17852 and G-18295. OWRD well log database, in particular: WASC 51079, WASC 52540 and WASC 52609.
The White River is likely a regional sink. References Used: Application files: G-18888 and groundwater reviews for nearby applications G-16891 G-16956, G-17852 and G-18295. OWRD well log database, in particular: WASC 51079, WASC 52540 and WASC 52609. Sherrod, D. R., and Scott, W. E., 1995, Preliminary map of the Mount Hood 30- by 60-minute quadrangle, Cascade Range, north
The White River is likely a regional sink. References Used: Application files: G-18888 and groundwater reviews for nearby applications G-16891 G-16956, G-17852 and G-18295. OWRD well log database, in particular: WASC 51079, WASC 52540 and WASC 52609.
References Used: Application files: G-18888 and groundwater reviews for nearby applications G-16891 G-16956, G-17852 and G-18295. OWRD well log database, in particular: WASC 51079, WASC 52540 and WASC 52609. Sherrod, D. R., and Scott, W. E., 1995, Preliminary map of the Mount Hood 30- by 60-minute quadrangle, Cascade Range, north

Application G-18890

7

Page

Date: May 13, 2020


D. WELL CONSTRUCTION, OAR 690-200

D1.	Well #	:		L	ogid:														
D2.	a.	VELL does not review of the field inspect report of CV other: (speci	e well log; tion by VRE																;
D3.		VELL constr		ency or o	ther con	nment	is descr	ibed	as f	ollows	s:								
D4.	□ Route	to the Well (Construction	and Con	nplianco	e Sectio	on for a	revio	ew o	f exist	ting v	vell c	onstr	uctio	n.				
Wate	er Availab	ility Tables			WATER	AVAILA	BILITY	TABLE	<u> </u>										
	: 6:08 PM	f: 70088				Basin:	TES R - DESCHUT	ΓES								Date			: 80 '2020
Nest	Watershed ID Number							JAN	FEB	MAR A	PR M	AY JU	N JUL	AUG	SEP	ост			
2	70088	WHITE R > D	ESCHUTES R -	- AT MOUTH	Н			NO	NO	YES Y	ES Y	ES N	O NO	NO	NO	NO	NO	NO	YES


		DETAILED REPORT	ON THE WATER AVAILA	BILITY CALCULATIO	N				
Watershed ID #: Time: 6:08 PM	70088	WHITE	R > DESCHUTES R - Basin: DESCHUT		Exceedance Level: 80 Date: 04/27/2020				
Month	Natural Stream Flow	Consumptive Use and Storage	Expected Stream Flow	Reserved Stream Flow	Instream Requirements	Net Water Available			
		Storage is t	Monthly values a he annual amount at	re in cfs. 50% exceedance i	n ac-ft.				
JAN FEB MAR APR MAY JUN JUL AUG SEP OCT	250.00 366.00 376.00 452.00 477.00 290.00 192.00 159.00 148.00	15.70 24.80 31.30 52.70 113.00 121.00 89.60 72.40 64.50 52.00	234.00 341.00 345.00 399.00 364.00 169.00 102.00 86.60 83.50 97.00	0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0	60.00 100.00 145.00 145.00 145.00 100.00 60.00 60.00 60.00	174.00 241.00 200.00 254.00 219.00 69.00 42.40 26.60 23.50 37.00			
NOV DEC ANN	149.00 151.00 211.00 276,000	52.00 5.82 8.59 39,400	145.00 202.00 237,000	0.00 0.00 0.00	60.00 60.00 60.00	37.00 85.20 142.00 173,000			

DETAILED REPORT OF INSTREAM REQUIREMENTS														
Watershed ID Time: 12:09		WHITE R > DESCHUTES R - AT MOUTH										Basin: DESCHUTES Date: 05/13/2020		
Application Number	Status	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NOV	DEC	
		Monthly values are in cfs.												
MF201A MF202A IS70088A	CERTIFICATE CERTIFICATE CERTIFICATE	60.0 60.0 60.0	95.0 100.0 100.0	95.0 145.0 145.0	95.0 145.0 145.0	95.0 145.0 145.0	95.0 100.0 100.0	60.0 60.0 60.0	60.0 60.0 60.0	60.0 60.0 60.0	60.0 60.0 60.0	60.00 60.00 60.00	60.0 60.0 60.0	
MAXIMUM		60.0	100.0	145.0	145.0	145.0	100.0	60.0	60.0	60.0	60.0	60.0	60.0	


Well Location Map

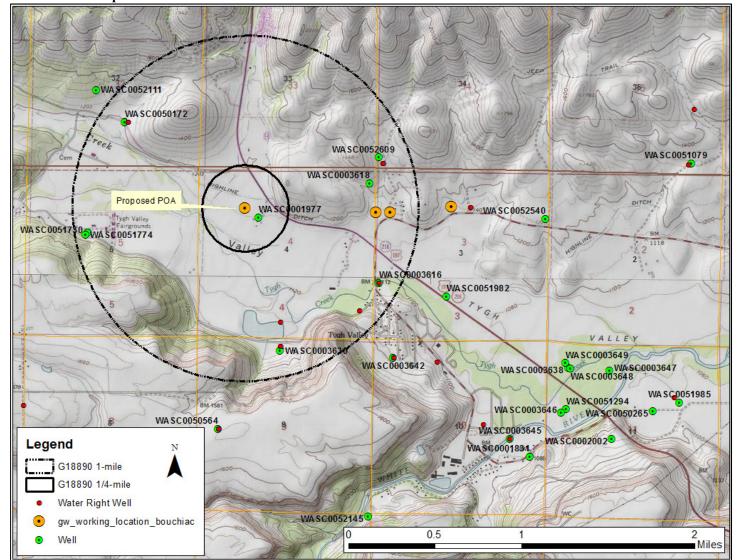


Geologic Map

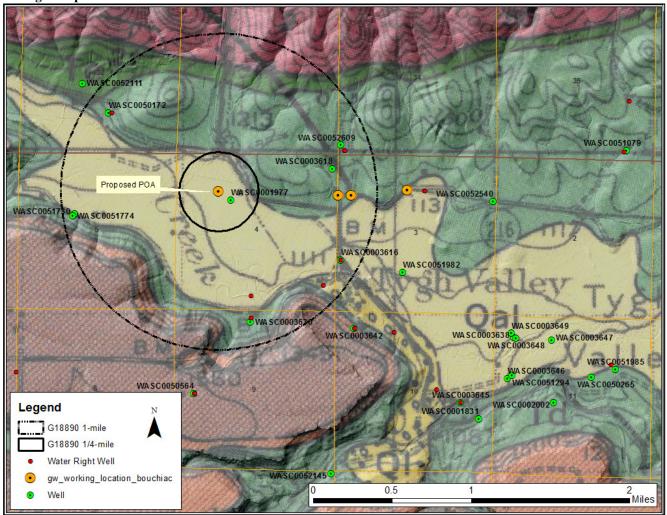


Water-Level Trends in Nearby Wells

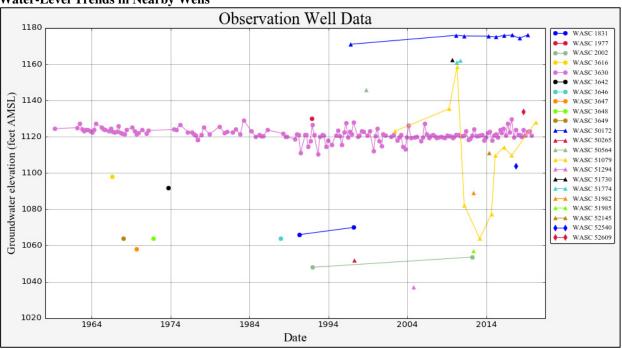

Stratigraphic Cross Section across Tygh Valley

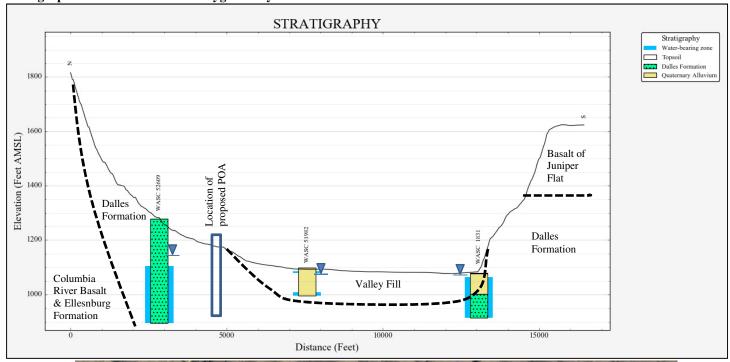

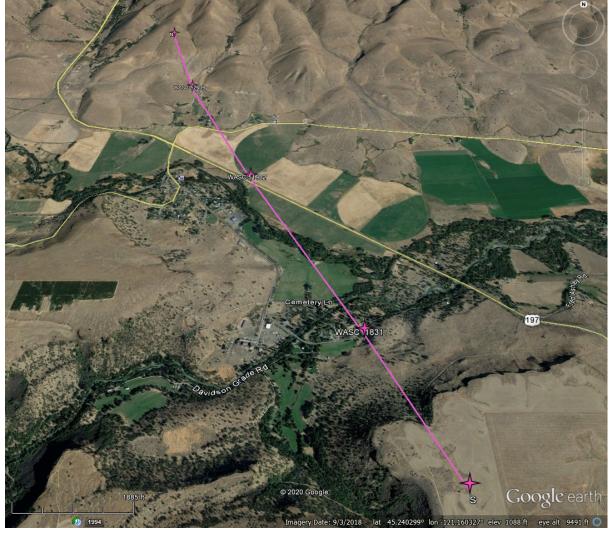

Page

Analytical Model for Stream Depletion of Tygh Creek

Transient Stream Depletion (Jenkins, 1970; Hunt, 1999, 2003)														
	0.120	G-18890 POA to Tygh Creek											_	
	0.120												. —	
(e)														
	0.100													
												-	_	
									1					
- arg	0.080	-						1		****	_	_	_	
fior Sch								and the same						
콩펻							11/1						_	
Stream depletion (fraction of well discharge)	0.080	-	+	-		100							-	
				١.,		/							_	
	0.040	+	+	-3	1								-	
٤			1 12	1									-	
			1	1										
	0.020	1	1	†								1	-	
		11/	1										l	
	0.000		3D (30 9	0 12	20 15	in 18	n 21	0 240	270	300	330 3	⊣ 360 —	
	_				Tin	20 15 ne since	start of p	umping ((days)					
			H	unt 2003	s 1	_	- Hunt	2003 s2		Н	unt 2003 s3		1	
				2000				2000 22			2000 30			
Outpu	it for S	tream D	epletio	n, Scene	erio 2 (s	2):	Time p	ump or	n (pump	ing duration	on) = 240	days		
Days		30	60	90	120	150					300	330	360	
J SD		92.3%	94.5%	95.5%	96.1%	96.5%	96.8%	97.1%	97.3%	5.19	3.0%	2.1%	1.6%	
H SD 1	1999	50.7%	61.1%	66.6%	70.3%	73.0%	75.0%	76.6%	78.0%	28.49	19.0%	14.3%	11.4%	
H SD 2	2003	1.70%	3.08%	4.41%	5.67%	6.84%	7.93%	8.95%	9.92%	9.129	8.61%	8.09%	7.62%	
Qw, c		1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.00	1.000	1.000	1.000	
H SD 9	99, cfs	0.507	0.611	0.666	0.703	0.730	0.750	0.766	0.780	0.28	0.190	0.143	0.114	
H SD 0	03, cfs	0.0170	0.0308	0.0441	0.0567	0.0684	0.0793	0.0895	0.0992	0.09120	4 0.0861	0.0809	0.0762	
Paran	neters	:				Scenario 1		Scenario 2		2 Sc	Scenario 3		Units	
Net ste	eady pu	ımping ra	te of we	1	Qw	1.00		1.00)	1.00		cfs	
Time pump on (pumping duration)					tpon	240			240		240		days	
Perpendicular from well to stream					а	1060		1060		1060		ft		
Well de	epth				d	250		250)	250		ft	
Aquifer hydraulic conductivity					К	10		25		5	50		ft/day	
Aquifer saturated thickness					b	80		80						
Aquifer transmissivity					Т	800		2000		4000			ft*ft/day	
Aquife	er stora	tivity or s	pecific y	ield	S	0.001		0.001		0.001				
Aquita	rd verti	ical hydra	aulic con	ductivity	Kva	1		1		1		ft/day		
		rated thic			ba	90		90		90				
		ness bel		ım	babs	80		80		80		ft		
	rd poro				n	0.2		0.2		0.2				
	n width				ws	40		40		40		ft		
Stream	nbed co	nductan	ce (lamb	da)	sbc	0.500000		0.500000)	0.500000			
		tion facto			sdf	1.404500		0.561800		0.280900				
	nbed fa				sbf	0.662500		0.265000			0.132500		-	
		unt's Q	4 function	n	ť	0.711997		1.779993		3.559986				
_		unt's Q_4			K'	15.605556		6.242222		3.121111				
		unt's Q_4			epsilon'		.005000		0.005000		0.005000			
_		unt's Q_4			lamda'		.662500		0.265000		0.132500			
put n		u			ALT TOTAL		.502000			1				