

# Groundwater Application Review Summary Form

Application # G- 18889

GW Reviewer Aurora C Bouchier Date Review Completed: January 15, 2021

## Summary of GW Availability and Injury Review:

Groundwater for the proposed use is either over appropriated, will not likely be available in the amounts requested without injury to prior water rights, OR will not likely be available within the capacity of the groundwater resource per Section B of the attached review form.

## Summary of Potential for Substantial Interference Review:

There is the potential for substantial interference per Section C of the attached review form.

## Summary of Well Construction Assessment:

The well does not appear to meet current well construction standards per Section D of the attached review form. Route through Well Construction and Compliance Section.

*This is only a summary. Documentation is attached and should be read thoroughly to understand the basis for determinations and for conditions that may be necessary for a permit (if one is issued).*

**WATER RESOURCES DEPARTMENT**

**MEMO**

**January 15, 2021**

**TO:** Application G- 18889

**FROM:** GW: Aurora C Bouchier  
(Reviewer's Name)

**SUBJECT: Scenic Waterway Interference Evaluation**

**YES** The source of appropriation is hydraulically connected to a State Scenic Waterway or its tributaries

**NO**

**YES** Use the Scenic Waterway Condition (Condition 7J)

**NO**

Per ORS 390.835, the Groundwater Section is **able** to calculate ground water interference with surface water that contributes to a Scenic Waterway. The calculated interference is distributed below

Per ORS 390.835, the Groundwater Section is **unable** to calculate ground water interference with surface water that contributes to a scenic waterway; **therefore, the Department is unable to find that there is a preponderance of evidence that the proposed use will measurably reduce the surface water flows necessary to maintain the free-flowing character of a scenic waterway**

**DISTRIBUTION OF INTERFERENCE**

*Calculate the percentage of consumptive use by month and fill in the table below. If interference cannot be calculated, per criteria in 390.835, do not fill in the table but check the "unable" option above, thus informing Water Rights that the Department is unable to make a Preponderance of Evidence finding.*

Exercise of this permit is calculated to reduce monthly flows in \_\_\_\_\_ Scenic Waterway by the following amounts expressed as a proportion of the consumptive use by which surface water flow is reduced.

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO: Water Rights Section Date January 15, 2021  
 FROM: Groundwater Section Aurora C Bouchier  
 Reviewer's Name  
 SUBJECT: Application G- 18889 Supersedes review of May 13, 2020  
 Date of Review(s)

**PUBLIC INTEREST PRESUMPTION; GROUNDWATER**

**OAR 690-310-130 (1)** *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525. Department staff review groundwater applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. This review is based upon available information and agency policies in place at the time of evaluation.*

**A. GENERAL INFORMATION:** Applicant's Name: Rodney Cubic County: Wasco

A1. Applicant(s) seek(s) 0.05 cfs from 1 well(s) in the Deschutes Basin,  
White River subbasin

A2. Proposed use Irrigation (4 acres) Seasonality: April 15 – October 15

A3. Well and aquifer data (attach and number logs for existing wells; mark proposed wells as such under logid):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	proposed	RC1	Tygh Valley Fm*	0.05	4S/13E-4 NE-NE	48' N, 18' W fr SE cor NE-NE cor S 4
2						

\* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	1140				TBD	TBD	TBD	TBD	TBD	22.4		

Use data from application for proposed wells.

A4. **Comments:** \*The application states the source aquifer as the Tygh Valley Formation. However, at the proposed location it appears likely that the well would actually be constructed into water-bearing zones within the Dalles Formation (Waters, 1968). The application states that the well inspector will be consulted on all aspects of well completion.

Section 3 of the application discusses the Highline Ditch and Diversion Elimination project (which includes transferring/converting/using as mitigation surface water rights [in whole or in part] into groundwater rights, and transferring the POU and POA for the remainder and additional surface water rights to remove a 9-mile long ditch). This section explains that Mr. Cubic is one of the users in this project. The application states that Mr. Cubic's land is authorized for use under surface water right Certificates 3733, 5491 and 8545. Based on the maps for these certificates it appears that the proposed POU for this application is partially covered under Certificates 3733 and 5491 but not Certificate 8545 (see OWRD Water Rights Mapping Tool images below). This application indicates that 4 acres from Certificate 3733, 5491, or 8545 could be used as mitigation for a new groundwater right. It appears that 8 out of 16.2 acres from Certificate 3733 are intended to be transferred under T-13304, and 8.1 out of 16.2 acres from Certificate 3733 could be used as mitigation under application G-18888. Certificate 5491 authorizes irrigation for 4 acres, perhaps these 4 acres are intended as a possible mitigation source for this new groundwater application.

A5.  **Provisions of the** Deschutes Basin rules relative to the development, classification and/or management of groundwater hydraulically connected to surface water  **are, or**  **are not**, activated by this application. (Not all basin rules contain such provisions.)  
 Comments: Outside the USGS Groundwater Study Area.

A6.  **Well(s) #** \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, tap(s) an aquifer limited by an administrative restriction.  
 Name of administrative area: \_\_\_\_\_  
 Comments: \_\_\_\_\_

**B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070**

B1. **Based upon available data**, I have determined that groundwater\* for the proposed use:

- a.  is over appropriated,  is not over appropriated, or  **cannot be determined to be** over appropriated during any period of the proposed use. \* This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b.  **will not** or  **will** likely be available in the amounts requested without injury to prior water rights. \* This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
- c.  **will not** or  **will** likely to be available within the capacity of the groundwater resource; or
- d.  **will, if properly conditioned**, avoid injury to existing groundwater rights or to the groundwater resource:
  - i.  The permit should contain condition #(s) 7J, 7N, 7T;
  - ii.  The permit should be conditioned as indicated in item 2 below.
  - iii.  The permit should contain special condition(s) as indicated in item 3 below;

- B2. a.  **Condition** to allow groundwater production from no deeper than \_\_\_\_\_ ft. below land surface;
- b.  **Condition** to allow groundwater production from no shallower than \_\_\_\_\_ ft. below land surface;
- c.  **Condition** to allow groundwater production only from the \_\_\_\_\_ groundwater reservoir between approximately \_\_\_\_\_ ft. and \_\_\_\_\_ ft. below land surface;
- d.  **Well reconstruction** is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.

**Describe injury** –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

B3. **Groundwater availability remarks:** \_\_\_\_\_

There are a number of nearby wells completed in the Dalles Formation. WASC 3630 (located on the south edge of Tygh Valley) has been monitored since the 1960's and shows no decline and a water-level coincident with nearby reaches of Tygh Creek. Two nearby wells (WASC 51079, located to the west along the north flank of Tygh Valley and WASC 51079 located on the hillsides to the northeast) have water-level permit conditions. Water-level measurements from WASC 51079 are relatively erratic, likely a response to pumping and restricted to a small locality. Aside from WASC 51079, the hydrograph for nearby wells indicates overall stable conditions at the current use.

The estimated yield listed on the nearby well logs range from 20 to 500 gpm. It appears likely that a well completed in the same formation should be capable of producing 22.4 or 45 gpm.

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040**

C1. **690-09-040 (1):** Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Tygh Valley Formation*	<input checked="" type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>

**Basis for aquifer confinement evaluation:** \*Based on the location it appears that the well will be constructed into interbedded sandstones/claystones and lava flows of the Dalles Formation. The nearby well logs list the SWL above the first water-bearing zone, but not by a large amount. It may be more accurate to describe the aquifer as semiconfined.

C2. **690-09-040 (2) (3):** Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
1	1	Tygh Creek	~1100 - 1120	~1080- 1140	1880	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
1	2	White River	~1100 - 1120	~1060	7730	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**Basis for aquifer hydraulic connection evaluation:** The geologic maps suggest that a well at the proposed location will be completed into the Dalles Formation. Wells completed in Dalles Formation located within Tygh Valley or along the southern flank of the valley have water-levels which are coincident in elevation with nearby reaches of the surface waters. Wells completed in the Dalles Formation located on the hill slope to the north of the valley are generally located a larger distance above the valley floor and display water-levels ranging from approximately 10 to 60 feet in elevation above the surface water sources. The proposed POA is located right at the northern edge of the valley floor and will likely have an elevation slightly above to coincident with nearby surface waters.

**Water Availability Basin the well(s) are located within:** 70088: WHITE R > DESCHTUES R – AT MOUTH

C3a. **690-09-040 (4):** Evaluation of stream impacts for each well that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water (SW) source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that SW source, not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% natural flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked  box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < ¼ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
1	1	<input type="checkbox"/>	<input type="checkbox"/>	IS 70088	60	<input type="checkbox"/>	148	<input type="checkbox"/>	<<25%	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

SW #	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

**Comments:** Interference at 30 days between the well and the surface water sources was estimated using the Hunt 2003 model. The low permeability layers below the stream bed result in an inefficient connection between the aquifer and the stream, therefore interference at 30 days should be less than 25%.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
1	2	0 %	0 %	0 %	0 %	0 %	0 %	0.01 %	0.02 %	0.04 %	0.06 %	1.10 %	0.14 %
Well Q as CFS		0	0	0	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0	0
Interference CFS		0	0	0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
(A) = Total Interf.		0	0	0	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
(B) = 80 % Nat. Q		250	366	376	452	477	290	192	159	148	149	151	211
(C) = 1 % Nat. Q		2.50	3.66	3.76	4.52	4.77	2.90	1.92	1.59	1.48	1.49	1.51	2.11
(D) = (A) > (C)		X	X	X	X	X	X	X	X	X	X	X	X
(E) = (A / B) x 100		%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

**Basis for impact evaluation:** Interference at 30 days between the well and the surface water sources was estimated using the Hunt 2003 model.

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

C4b. **690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.**

C5.  **If properly conditioned**, the surface water source(s) can be adequately protected from interference, and/or groundwater use under this permit can be regulated if it is found to substantially interfere with surface water:

- i.  The permit should contain condition #(s) 7J;
- ii.  The permit should contain special condition(s) as indicated in "Remarks" below;

C6. **SW / GW Remarks and Conditions:** \_\_\_\_\_

The White River is likely a regional sink.  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**References Used:**

Application files: G-18888 and groundwater reviews for nearby applications G-16891 G-16956, G-17852 and G-18295.

OWRD well log database, in particular: WASC 51079, WASC 52540 and WASC 52609.

Sherrod, D. R., and Scott, W. E., 1995, Preliminary map of the Mount Hood 30- by 60-minute quadrangle, Cascade Range, north-central Oregon: Reston, Va., U.S. Geological Survey, Open File Report 95-219, map scale 100,000.

Waters, A.C., 1968, Reconnaissance geologic map of the Dufur quadrangle, Hood River, Sherman, and Wasco Counties, Oregon: U.S. Geological Survey, Miscellaneous Geologic Investigations Map I-556, scale 1:125,000.

**D. WELL CONSTRUCTION, OAR 690-200**

D1. Well #: \_\_\_\_\_ Logid: \_\_\_\_\_

D2. THE WELL does not appear to meet current well construction standards based upon:

- a.  review of the well log;
- b.  field inspection by \_\_\_\_\_;
- c.  report of CWRE \_\_\_\_\_;
- d.  other: (specify) \_\_\_\_\_

D3. THE WELL construction deficiency or other comment is described as follows: \_\_\_\_\_

D4.  Route to the Well Construction and Compliance Section for a review of existing well construction.

**Water Availability Tables**


WATER AVAILABILITY TABLE															
Watershed ID #: 70088		WHITE R > DESCHUTES R - AT MOUTH										Exceedance Level: 80			
Time: 6:08 PM		Basin: DESCHUTES										Date: 04/27/2020			
# watershed	Nest ID Number	Stream Name	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	STOR
1	70087	DESCHUTES R > COLUMBIA R - AB MOUTH AT GAGE 14103000	NO	NO	YES	YES	YES	NO	NO	NO	NO	NO	NO	NO	YES
2	70088	WHITE R > DESCHUTES R - AT MOUTH	NO	NO	YES	YES	YES	NO	NO	NO	NO	NO	NO	NO	YES

DETAILED REPORT ON THE WATER AVAILABILITY CALCULATION						
Watershed ID #: 70088		WHITE R > DESCHUTES R - AT MOUTH				Exceedance Level: 80
Time: 6:08 PM		Basin: DESCHUTES				Date: 04/27/2020
Month	Natural Stream Flow	Consumptive Use and Storage	Expected Stream Flow	Reserved Stream Flow	Instream Requirements	Net water Available
Monthly values are in cfs. Storage is the annual amount at 50% exceedance in ac-ft.						
JAN	250.00	15.70	234.00	0.00	60.00	174.00
FEB	366.00	24.80	341.00	0.00	100.00	241.00
MAR	376.00	31.30	345.00	0.00	145.00	200.00
APR	452.00	52.70	399.00	0.00	145.00	254.00
MAY	477.00	113.00	364.00	0.00	145.00	219.00
JUN	290.00	121.00	169.00	0.00	100.00	69.00
JUL	192.00	89.60	102.00	0.00	60.00	42.40
AUG	159.00	72.40	86.60	0.00	60.00	26.60
SEP	148.00	64.50	83.50	0.00	60.00	23.50
OCT	149.00	52.00	97.00	0.00	60.00	37.00
NOV	151.00	5.82	145.00	0.00	60.00	85.20
DEC	211.00	8.59	202.00	0.00	60.00	142.00
ANN	276,000	39,400	237,000	0	63,600	173,000


DETAILED REPORT OF INSTREAM REQUIREMENTS													
Watershed ID #: 70088		WHITE R > DESCHUTES R - AT MOUTH										Basin: DESCHUTES	
Time: 12:09 PM												Date: 05/13/2020	
Application Number	Status	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
Monthly values are in cfs.													
MF201A	CERTIFICATE	60.0	95.0	95.0	95.0	95.0	95.0	60.0	60.0	60.0	60.0	60.00	60.0
MF202A	CERTIFICATE	60.0	100.0	145.0	145.0	145.0	100.0	60.0	60.0	60.0	60.0	60.00	60.0
IS70088A	CERTIFICATE	60.0	100.0	145.0	145.0	145.0	100.0	60.0	60.0	60.0	60.0	60.00	60.0
MAXIMUM		60.0	100.0	145.0	145.0	145.0	100.0	60.0	60.0	60.0	60.0	60.0	60.0




### Well Location Map

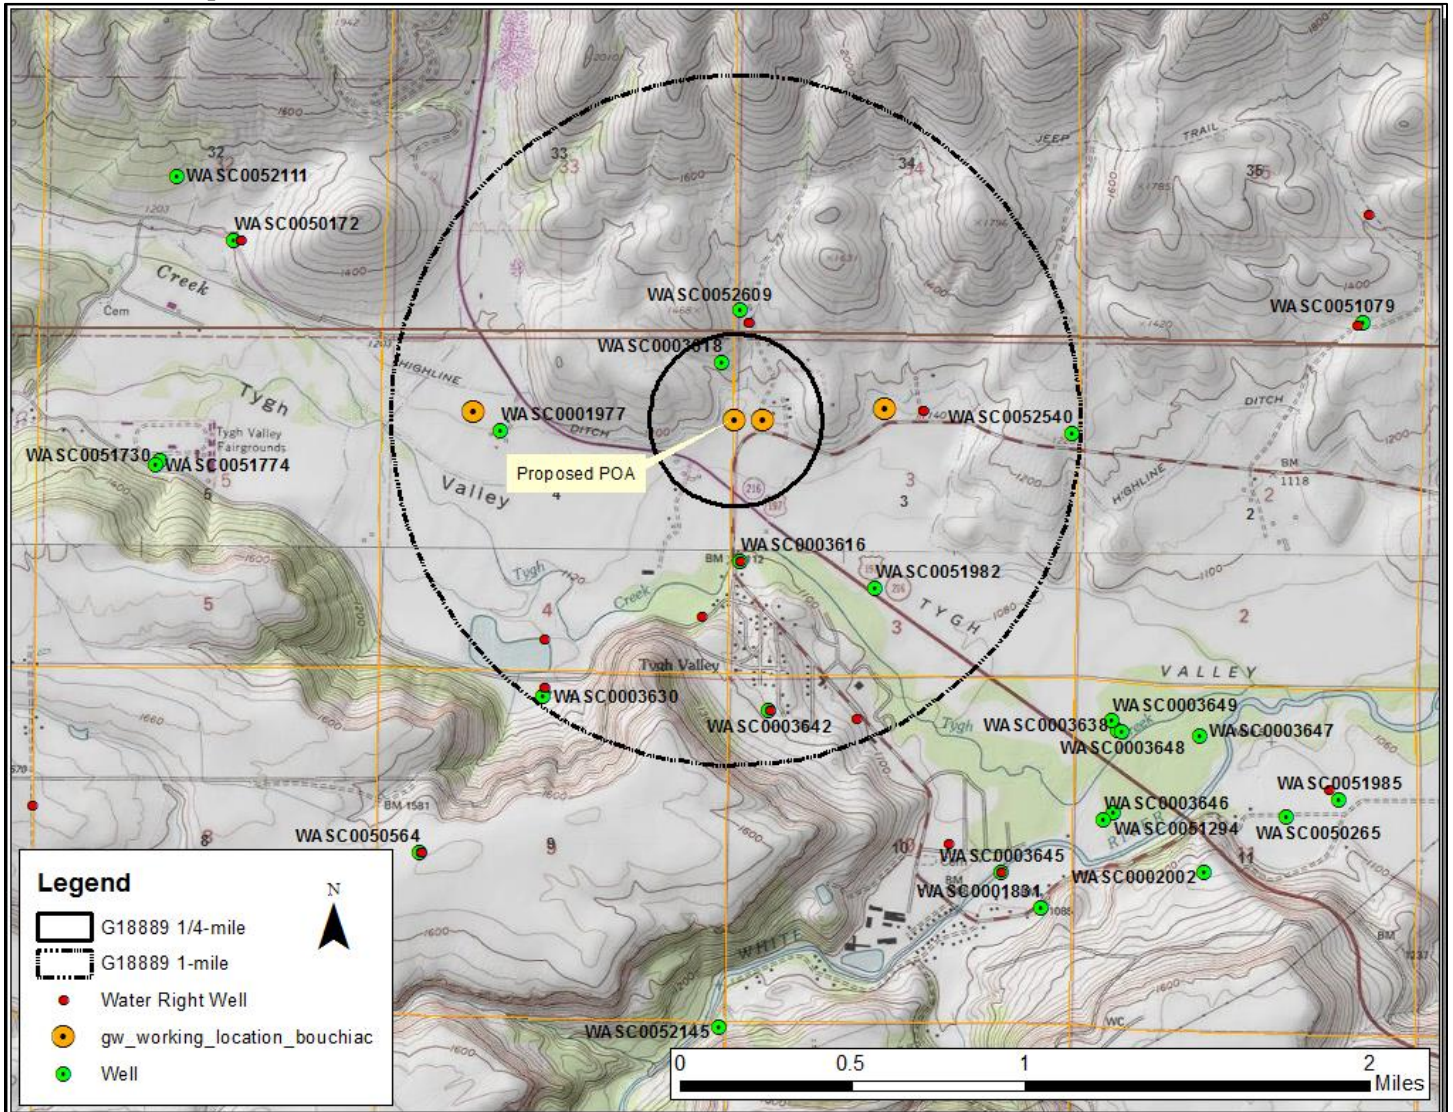


**Geologic Map**

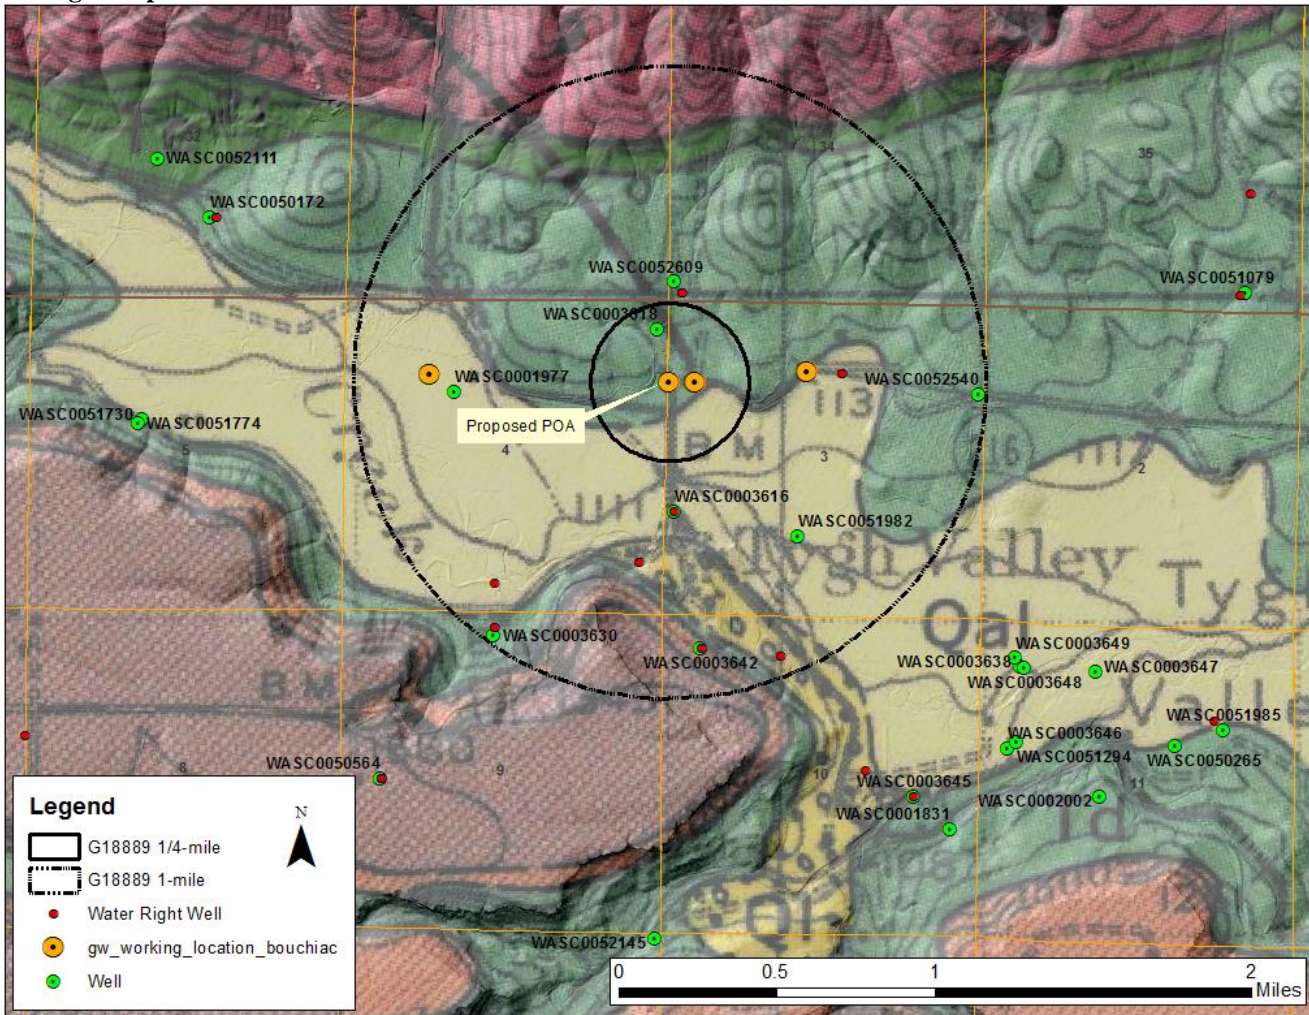


**Water-Level Trends in Nearby Wells**

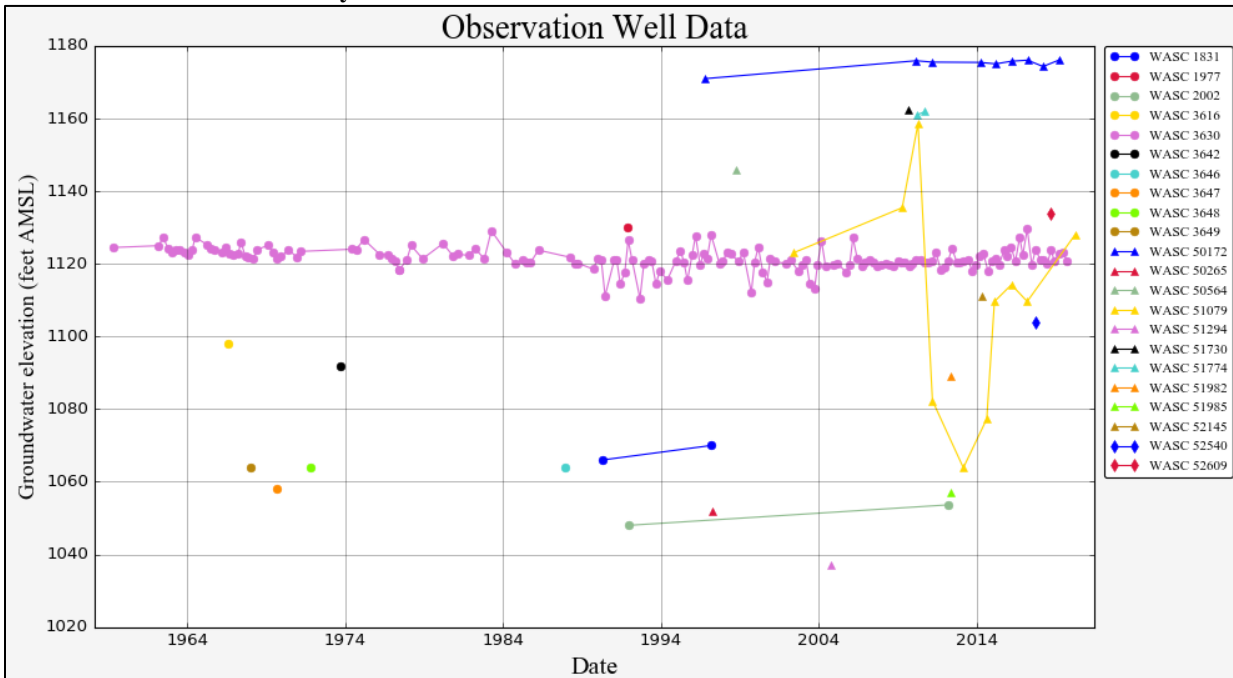

### Stratigraphic Cross Section across Tygh Valley

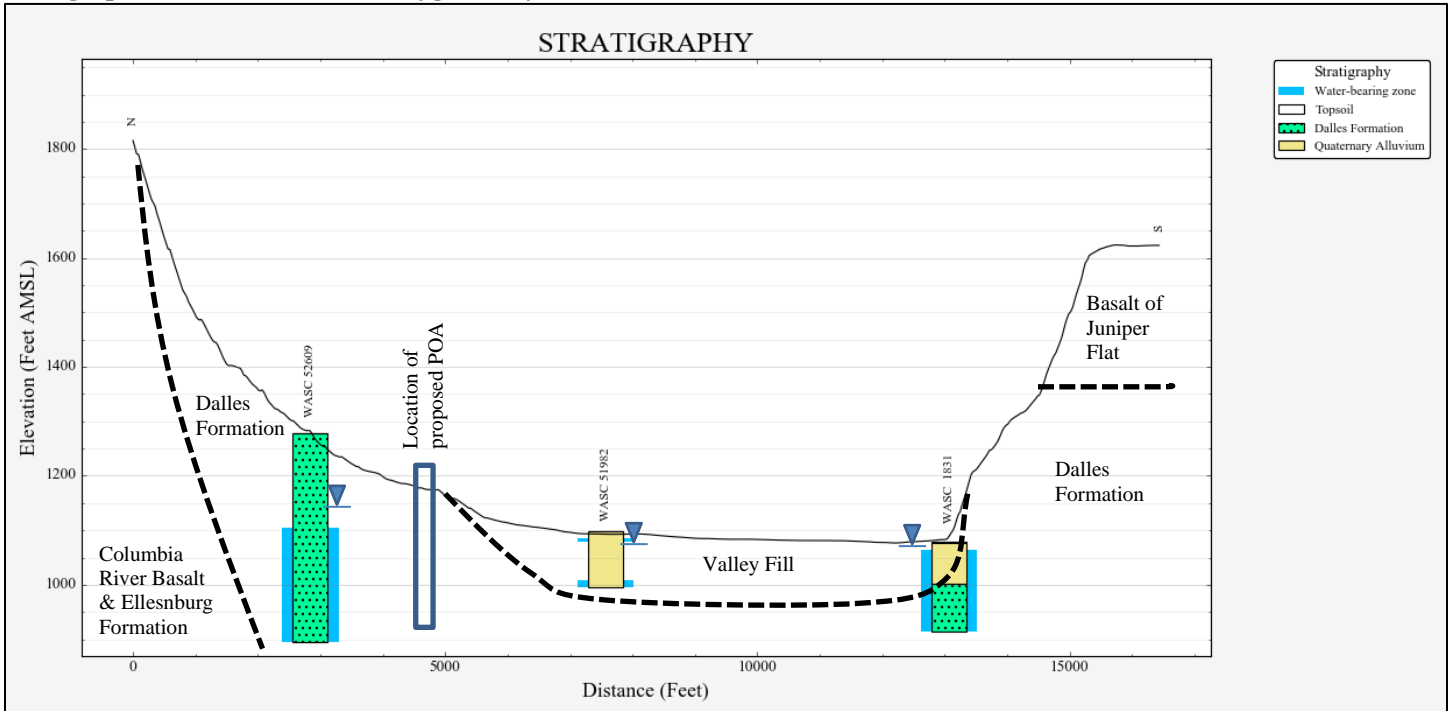


**Analytical Model for Stream Depletion of Tygh Creek**

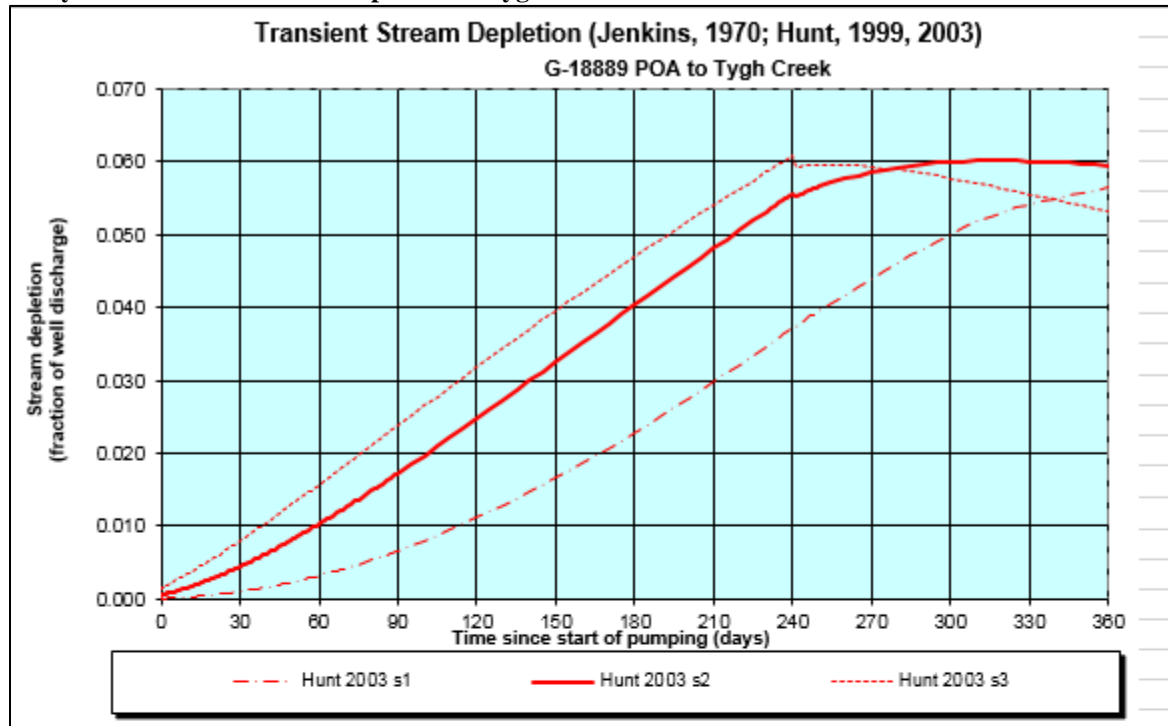

Output for Stream Depletion, Scenerio 2 (s2):												Time pump on (pumping duration) = 240 days		
Days	30	60	90	120	150	180	210	240	270	300	330	360		
J SD	86.4%	90.3%	92.1%	93.2%	93.9%	94.4%	94.8%	95.2%	9.1%	5.3%	3.8%	2.9%		
H SD 1999	46.5%	57.7%	63.7%	67.7%	70.6%	72.8%	74.6%	76.0%	30.7%	20.6%	15.5%	12.4%		
H SD 2003	0.45%	1.03%	1.73%	2.48%	3.26%	4.04%	4.81%	5.57%	5.86%	6.00%	6.01%	5.95%		
Qw, cfs	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050		
H SD 99, cfs	0.023	0.029	0.032	0.034	0.035	0.036	0.037	0.038	0.015	0.010	0.008	0.006		
H SD 03, cfs	0.0002	0.0005	0.0009	0.0012	0.0016	0.0020	0.0024	0.0028	0.002931	0.0030	0.0030	0.0030		

Parameters:		Scenario 1	Scenario 2	Scenario 3	Units
Net steady pumping rate of well	Qw	0.05	0.05	0.05	cfs
Time pump on (pumping duration)	tpon	240	240	240	days
Perpendicular from well to stream	a	1880	1880	1880	ft
Well depth	d	250	250	250	ft
Aquifer hydraulic conductivity	K	10	25	50	ft/day
Aquifer saturated thickness	b	80	80	80	ft
Aquifer transmissivity	T	800	2000	4000	ft*ft/day
Aquifer storativity or specific yield	S	0.001	0.001	0.001	
Aquitard vertical hydraulic conductivity	Kva	1	1	1	ft/day
Aquitard saturated thickness	ba	90	90	90	ft
Aquitard thickness below stream	babs	80	80	80	ft
Aquitard porosity	n	0.2	0.2	0.2	
Stream width	ws	40	40	40	ft
Streambed conductance (lambda)	sbc	0.500000	0.500000	0.500000	ft/day
Stream depletion factor	sdf	4.418000	1.767200	0.883600	days
Streambed factor	sbf	1.175000	0.470000	0.235000	
input #1 for Hunt's Q_4 function	t'	0.226347	0.565867	1.131734	
input #2 for Hunt's Q_4 function	K'	49.088889	19.635556	9.817778	
input #3 for Hunt's Q_4 function	epsilon'	0.005000	0.005000	0.005000	
input #4 for Hunt's Q_4 function	lamda'	1.175000	0.470000	0.235000	


Analytical Model for Stream Depletion of White River

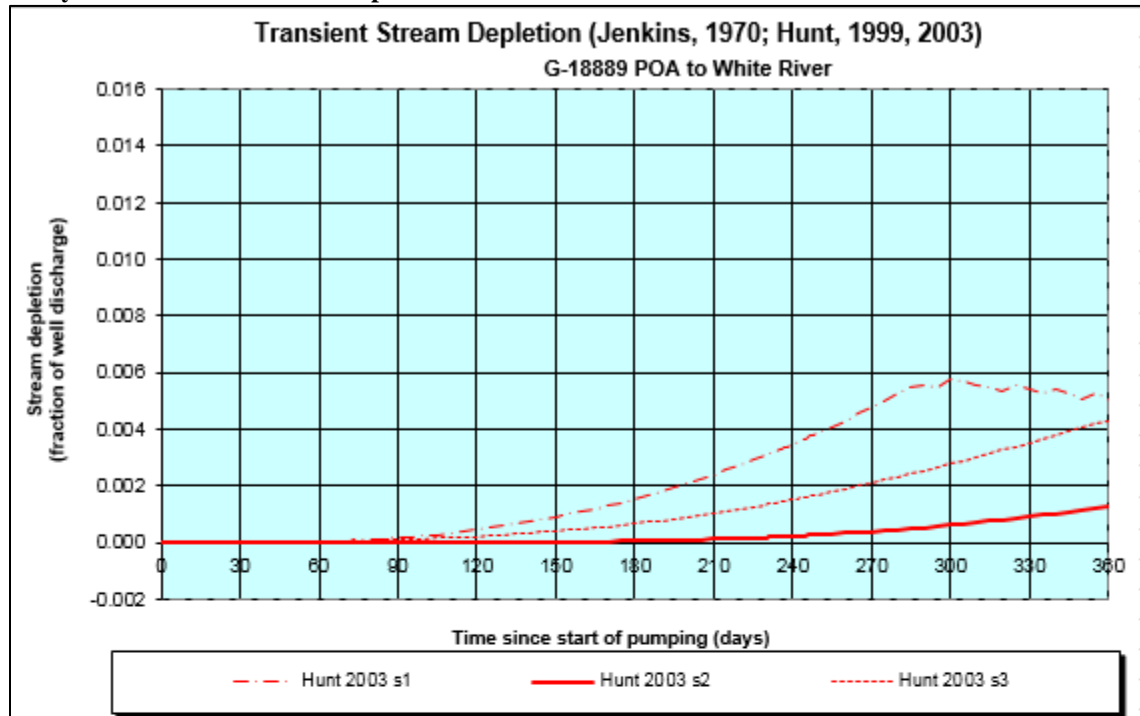

Output for Stream Depletion, Scenerio 2 (s2):				Time pump on (pumping duration) = 240 days								
Days	30	60	90	120	150	180	210	240	270	300	330	360
J SD	48.0%	61.8%	68.4%	72.4%	75.2%	77.3%	79.0%	80.3%	33.4%	20.6%	14.8%	11.4%
H SD 1999	22.5%	36.3%	44.5%	50.2%	54.4%	57.6%	60.3%	62.5%	41.8%	29.7%	22.9%	18.5%
H SD 2003	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.01%	0.02%	0.04%	0.06%	0.09%	0.13%
Qw, cfs	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050	0.050
H SD 99, cfs	0.011	0.018	0.022	0.025	0.027	0.029	0.030	0.031	0.021	0.015	0.011	0.009
H SD 03, cfs	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0001

Parameters:		Scenario 1	Scenario 2	Scenario 3	Units
Net steady pumping rate of well	Qw	0.05	0.05	0.05	cfs
Time pump on (pumping duration)	tpon	240	240	240	days
Perpendicular from well to stream	a	7730	7730	7730	ft
Well depth	d	250	250	250	ft
Aquifer hydraulic conductivity	K	10	25	50	ft/day
Aquifer saturated thickness	b	80	80	80	ft
Aquifer transmissivity	T	800	2000	4000	ft <sup>2</sup> /day
Aquifer storativity or specific yield	S	0.001	0.001	0.001	
Aquitard vertical hydraulic conductivity	Kva	1	1	1	ft/day
Aquitard saturated thickness	ba	90	90	90	ft
Aquitard thickness below stream	babs	80	80	80	ft
Aquitard porosity	n	0.2	0.2	0.2	
Stream width	ws	40	40	40	ft
Streambed conductance (lambda)	sbc	0.500000	0.500000	0.500000	ft/day
Stream depletion factor	sdf	74.691125	29.876450	14.938225	days
Streambed factor	sbf	4.831250	1.932500	0.966250	
input #1 for Hunt's Q_4 function	t'	0.013388	0.033471	0.066942	
input #2 for Hunt's Q_4 function	K'	829.901389	331.960556	165.980278	
input #3 for Hunt's Q_4 function	epsilon'	0.005000	0.005000	0.005000	
input #4 for Hunt's Q_4 function	lamda'	4.831250	1.932500	0.966250	

**OWRD Water Rights Mapping Tool for Cert 3733 – proposed POU outlined in red over certificate POU outlined in blue/green**

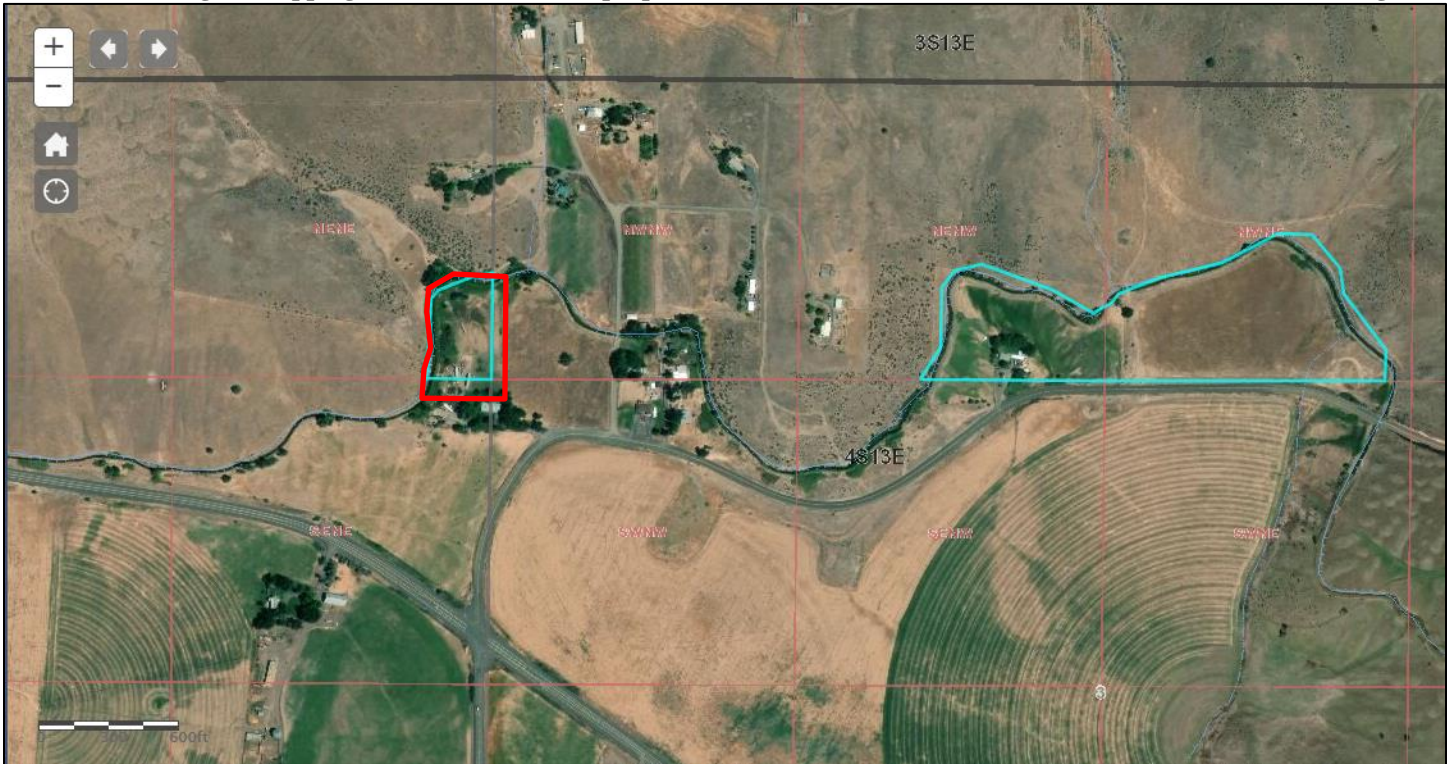

**OWRD Water Rights Mapping Tool for Cert 5491 – proposed POU outlined in red over certificate POU outlined in blue/green**



**OWRD Water Rights Mapping Tool for Cert 8545 – proposed POU outlined in red over certificate POU outlined in blue/green**

