


E.E. STOREY & SON WELL DRILLING, INC

3847 HOPE STREET - KLAMATH FALLS, OREGON 97601
503/884-3990 or 503/882-1152
CONTRACTOR'S LICENSES - ORE. 74 and 601



LISKEY FARMS, INC.
BOX 467
MERRILL, OREGON 97633
SE 1/4 NE 1/4 S34 T40S R9E
HOME RANCH - LOWER KLAMATH
STOCK WELL



STARTED 12/13/76
COMPLETED 12/13/76

LOG

0	-	2	brown clay topsoil
2	-	13	yellow clay
13	-	45	gray clay
45	-	261	hard gray shale

Static 17'
 20' of 5/8 X .250 casing set at 19 1/2': HC shoe
 5 sacks Bentonnite
 After casing installed:

80'	132 degrees	30 GPM
155'	144 degrees	30GPM
261'	189 degrees	150 GPM

EXPENSES

261' soft drilling @ \$4.80 per ft.....	\$1,252.80
20' of 6 5/8 X .250 casing @ \$6.26 per ft.....	125.20
One drive shoe.....	35.00
5 sacks Bentonnite @ \$7.75 per sack.....	<u>38.75</u>
Amount due on stock well.....	\$1,451.75
(Four sacks Bentonnite used on 12" well on top.....	<u>31.00</u>
TOTAL AMOUNT DUE.....	<u>\$1,482.75</u>

Hot house well Before enlarging

1 1/2% Interest per month charged
on all accounts after 30 days
which is 18% per annum.

RECEIVED

T-10327

FEB 28 2007

WATER RESOURCES DEPT
SALEM, OREGON

RECEIVED
OVER THE COUNTER

E.E. STOREY & SON WELL DRILLING, INC

3847 HOPE STREET — KLAMATH FALLS, OREGON 97601
 503/884-3990 or 503/882-1152
 CONTRACTOR'S LICENSES - ORE. 74 and 601



LISKEY FARMS, INC.
 BOX 467
 MERRILL, OREGON 97633
 SE 1/4 NE 1/4 S34 T40S R9E
 HOME RANCH, LOWER KLAMATH
 REAM 6" STOCK WELL TO 12"

#10

STARTED 2/22/77
 COMPLETED 2/24/77

LOG

0 - 2 brown clay topsoil
 2 - 13 yellow clay
 13 - 45 gray clay
 45 - 261 hard gray shale

Static 17'
 Temperature 188 degrees
 Pumped 1,000 GPM +

EXPENSES

277' soft drilling @ \$12.00 per ft.....\$3,324.00
 42' of 12 3/4 X .250 casing @ \$10.85 per ft..... 455.70
 One 12" shoe..... 175.00
 67 sacks cement @ \$8.00 per sack..... 536.00
 20 sacks Bentonite @ \$8.00 per sack..... 160.00
 \$4,650.70

CREDITS:

6" pipe used in 6" well
 (20' of 6 5/8 X .250 casing @ \$6.26 per ft).....\$ 125.20
 One HC shoe..... 35.00
 Half price on 6" hole
 (261' of soft drilling @ \$4.80 per ft..\$1,252.80).... 626.40
 \$ 786.60

\$4,650.70

Less credits..... 786.60

Balance due.....\$3,864.10

RECEIVED

FEB-28 2007

WATER RESOURCES DEPT
 SALEM, OREGON

RECEIVED
 OVER THE COUNTER

1 1/2% Interest per month charged
 on all accounts after 30 days
 which is 18% per annum.

Well West of Hay Shed.

*Pumped 1100 gal at 67 ft
 200' water
 T-10327*

ch. = 3968

E.E. STOREY & SON WELL DRILLING, INC



3847 HOPE STREET — KLAMATH FALLS, OREGON 97601
503/884-3990 or 503/882-1152
CONTRACTOR'S LICENSES - ORE. 74 and 601

LISKEY FARMS, INC.
BOX 467
MERRILL, OREGON 97633

DECEMBER 13, 1976


WELL ON HOME RANCH - LOWER KLAMATH - COMPLETED 12/10/76 _ WELL ~~1~~ # ~~2~~

EXPENSES

181' soft drilling @ \$9.60 per ft.....	\$1,737.60
141' of 12"OD X .250 casing installed @ \$2.00 per ft.....	282.00
Casing furnished by customer	
2 sacks Bentonite @ \$7.75 per sack.....	15.50
180 sacks cement @ \$7.75 per sack.....	1,395.00
Rental of groute pump.....	<u>250.00</u>
	\$3,680.10
Less advance payment.....	<u>500.00</u>
Balance due.....	\$3,180.10

well by Elevator

1 1/2% Interest per month charged
on all accounts after 30 days
which is 18% per annum.

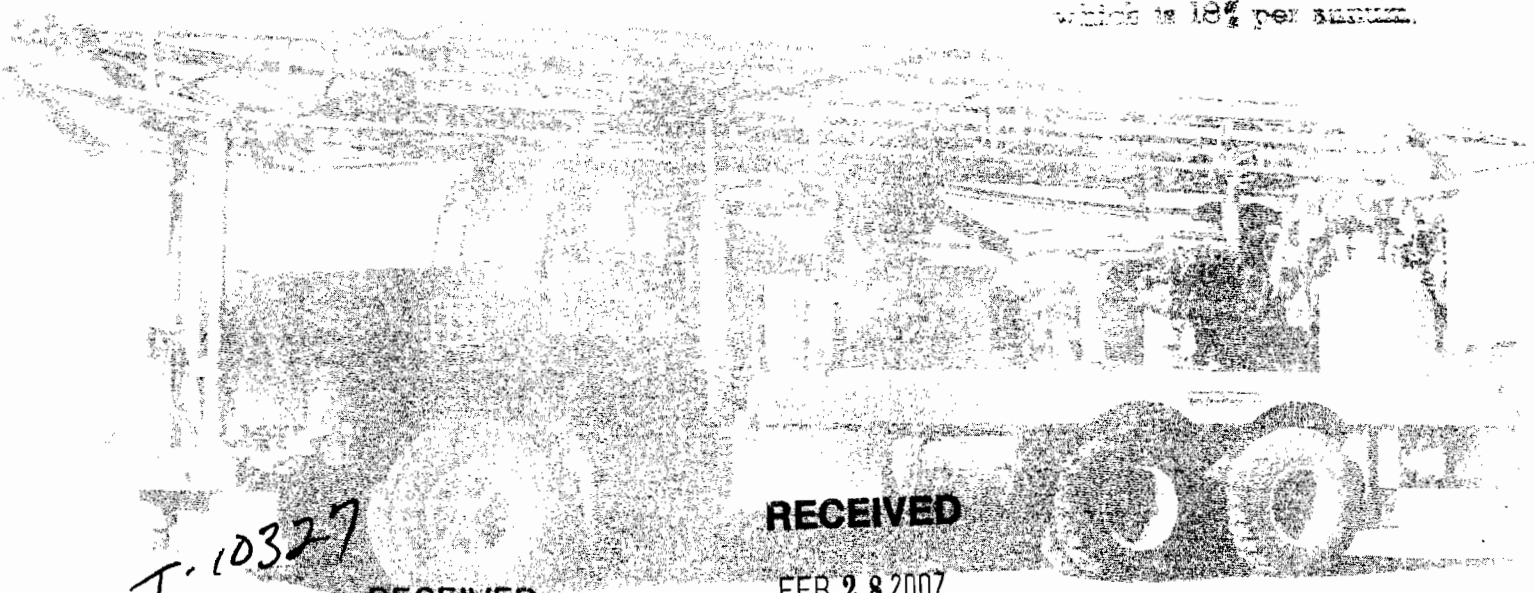

T-10327

RECEIVED
OVER THE COUNTER

RECEIVED


FEB 28 2007

WATER RESOURCES DEPT
SALEM, OREGON

Page 2

E.E. STOREY & SON WELL DRILLING, INC

3847 HOPE STREET — KLAMATH FALLS, OREGON 97601
503/884-3990 or 503/882-1152
CONTRACTOR'S LICENSES - ORE. 74 and 601

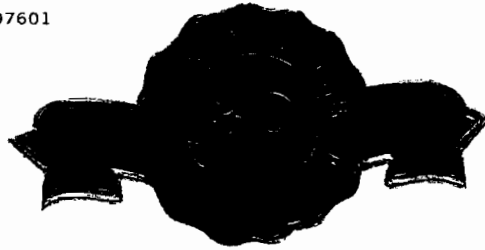

LISKEY FARMS, INC.
BOX 467
MERRILL, OREGON 97633
SE 1/4 NE 1/4 S34 T40S R9E
HOME RANCH - LOWER KLAMATH
WELL #1

#02

STARTED 12/6/76
COMPLETED 12/10/76

LOG

- 0 - 2 black clay topsoil
- 2 - 5 yellow clay
- 5 - 6 green clay
- 6 - 46 hard gray shale
- 46 - 160 gray shale
- 160 - 176 hard gray shale with streaks of pumice
- 176 - 181 hard gray shale

Static 13 1/2'
Temperature 189 degrees
141' of 12" OD C .250 casing set at 140": coupling shoe
180 sacks cement
2 sacks Bentonnite
Air lift: 830 GPM at 120' after casing installed

Temperatures while drilling before casing installed:

95'	95 degrees	5 GPM
125'	100 degrees	10 GPM
135'	135 degrees	25 GPM
170'	160 degrees	40 GPM

T-10327

RECEIVED
OVER THE COUNTER



RECEIVED

FEB 28 2007

WATER RESOURCES DEPT
SALEM, OREGON

E.E. STOREY & SON WELL DRILLING, INC



3847 HOPE STREET — KLAMATH FALLS, OREGON 97601
503/884-3990 or 503/882-1152
CONTRACTOR'S LICENSES - ORE. 74 and 601

JUNE 14, 1979

Grain tank

LISKEY FARMS, INC.
P.O. BOX 467
MERRILL, OREGON 97633
SE 1/4 NE 1/4 S34 T40S R9E
HOME RANCH NEXT TO LOWER LAKE ROAD

#02

GALE
STARTED 6/6/79
COMPLETED 6/7/79

#1 DEEPENING TWELVE INCH OD WELL

LOG

181 - 290 blue gray shale
290 - 305 gray shale
305 - 455 blue gray shale

Static 20'
Temperature 196 degrees
Air lift: 1500 GPM at 455'
1500 GPM at 380'

EXPENSES

274' soft drilling @ \$10.00 per ft.....\$2,740.00
Less advance payment..... 500.00
Balance due.....\$2,240.00

T-10327

RECEIVED

FEB 28 2007

RECEIVED
OVER THE

WATER RESOURCES DEPT
SALEM, OREGON

**1 1/2% Interest per month charged
on all accounts after 30 days
which is 18% per annum.**

#3

LISTED TOP SOIL BY SHOP DNO. 15, 1924
8" Well

0-----3 Top Dirt
 3-----6 Hard soil
 6-----24 Yellow Chalk
 24-185 Blue and yellow with alternate
 185-200 Clay with streaks of hard shale
 200-274 Hard blue shale
 274-277 1/2 Purice gravel with lots of water.

Temperatures at 45' Luke warm
 145' 109 Degrees
 210' 124
 260' 129
 270' 140
 277 1/2 " 170

277 1/2 feet of 8" hole at \$2.00 -----\$555.00

~~0-----3 Top dirt
 3-----10 Chalk
 10-----17 Hard rocky clay
 17-----53 Clay with streaks of shale~~

~~Water test 50 gallons per minute drawing the water down 35'~~

~~Temperature 170 degrees~~

~~53' of 8" hole at \$2.00 -----\$106.00~~

~~Total -----\$661.00~~

All to apply on leveling job.

#3 Well

LISTED TOP SOIL BY SHOP

Reamed from 8" hole to 20" hole.

0-----3 Top Dirt
 3-----6 Hard pan
 6-----24 Yellow Chalk
 24-----184 Blue and yellow with alternate
 184-200 Clay with streaks of hard shale
 200-274 Hard blue shale
 274-282 Purice gravel with lots of water

Temperature when pumping 4500 gal. per hr.

199 Degrees.

Static water level 17 feet.

Pumping level at 4500 gal. 19 feet.

282 Feet of 20" hole at \$5.00 -----\$1410.00

RECEIVED

FEB 28 2007

WATER RESOURCES DEPT
SALEM, OREGON

RECEIVED
OVER THE COUNTER

T-10327