

# EDWARD SURVEYING

OCT 30 1992

RECEIVED

160 S. W. ELEVENTH • P.O. BOX 763 • HERMISTON, OREGON 97108

SEP 13 1991  
WATER RESOURCES DEPT.  
PHONE (503) 567-3330  
SALEM, OREGON

CLAIM OF BENEFICIAL USE  
FOR APPLICATION T-6078 CERTIFICATE G-50639  
DENNIS R. INGRAM  
505 NE 7 TH SREET  
GRANTS PASS, OR 97526  
PHONE 474-1111

The source is a well which was drilled in July 1988 by Larry Burd. It is 10" in diameter 112 feet deep and cased. The static level is 48.4 feet below the ground, *measured through a 3/4" threaded hole on top of the casing. It has a plastic plug.*

There is a 15 HP "Gundfos" submersible pump set in 92 feet of 4" galvanized pipe. *D.R.E.*


There is about 12 feet of 4" PVC connecting this well to the existing system (see Final Proof survey for permit # G-3702 done on 8-4-78 by Barwin). It has a flow meter on it which reads 170532.

The crop for certificate # 50639 is melons and the land is level (no more than 15 feet difference in elevation. Picked from a Quad Map).

The survey tie is to a US brass cap at the east 1/4 corner of Sec. 36 and an OSHD brass cap which lies S 60° 09' W 16.25 feet from the NE corner of Sec. 36.

I used a Pentax EMD and Theodolite to tie well # 5. Location of the other wells and place of use are from Barwin's 1978 Final Proof survey for permit # G-3702.

The final proof survey and inspection of the use as found to be completed under the terms and conditions of Transfer 6078 was completed by me on 8-29-91, and the facts contained in this report and accompanying map are correct to the best of my knowledge.

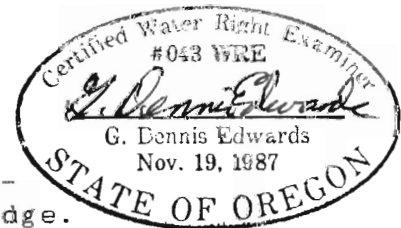

I, Dennis R. Ingram, agree to the findings of the CWRE and do submit this site report and map as my Claim of Beneficial Use of the water as provided under the terms and conditions of my Transfer 6078.

*[Handwritten signature of Dennis R. Ingram]*

April 20, 1992

MR. DENNIS G. EDWARDS  
PO BOX 763  
HERMISTON, OREGON 97838

REFERENCE: File T-6078

During our review of the claim and map for Transfer 6078 , the following problems were noted:

The condition requiring an access port must be acknowledged in the site report and claim of beneficial use.

We are returning the claim. You are responsible for correcting the above discrepancy Please submit the corrected claim within ninety (90) days.

We are also including for your reference, a copy of the standard format for site reports. It would be appreciated if you would utilize this format in future reports you submit.

If you have any questions, please call the Water Rights Section at 378-3739.

Enclosures

DSM

