

Groundwater Application Review Summary Form

Application # G- 19351

GW Reviewer Phillip I. Marcy Date Review Completed: 10/05/2023

Summary of GW Availability and Injury Review:

☐ Groundwater for the proposed use is either over appropriated, will not likely be available in the amounts requested without injury to prior water rights, OR will not likely be available within the capacity of the groundwater resource per Section B of the attached review form.

Summary of Potential for Substantial Interference Review:

☐ There is the potential for substantial interference per Section C of the attached review form.

Summary of Well Construction Assessment:

☐ The well does not appear to meet current well construction standards per Section D of the attached review form. Route through Well Construction and Compliance Section.

This is only a summary. Documentation is attached and should be read thoroughly to understand the basis for determinations and for conditions that may be necessary for a permit (if one is issued).

WATER RESOURCES DEPARTMENT

MEMO

October 5, 2023

TO: Application G- 19351

FROM: GW: Phillip I. Marcy
(Reviewer's Name)

SUBJECT: Scenic Waterway Interference Evaluation

- ☐ YES The source of appropriation is hydraulically connected to a State Scenic Waterway or its tributaries
- ☒ NO
-
- ☐ YES Use the Scenic Waterway Condition (Condition 7J)
- ☒ NO
-
- ☐ Per ORS 390.835, the Groundwater Section is **able** to calculate ground water interference with surface water that contributes to a Scenic Waterway. The calculated interference is distributed below
-
- ☐ Per ORS 390.835, the Groundwater Section is **unable** to calculate ground water interference with surface water that contributes to a scenic waterway; **therefore, the Department is unable to find that there is a preponderance of evidence that the proposed use will measurably reduce the surface water flows necessary to maintain the free-flowing character of a scenic waterway**

DISTRIBUTION OF INTERFERENCE

Calculate the percentage of consumptive use by month and fill in the table below. If interference cannot be calculated, per criteria in 390.835, do not fill in the table but check the "unable" option above, thus informing Water Rights that the Department is unable to make a Preponderance of Evidence finding.

Exercise of this permit is calculated to reduce monthly flows in [Enter] Scenic Waterway by the following amounts expressed as a proportion of the consumptive use by which surface water flow is reduced.

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO: Water Rights Section Date 10/05/2023
 FROM: Groundwater Section Phillip I. Marcy
 Reviewer's Name
 SUBJECT: Application G- 19351 Supersedes review of _____
 Date of Review(s)

PUBLIC INTEREST PRESUMPTION; GROUNDWATER

OAR 690-310-130 (1) *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525. Department staff review groundwater applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. This review is based upon available information and agency policies in place at the time of evaluation.*

A. GENERAL INFORMATION: Applicant's Name: Oak Park Farms County: Linn

A1. Applicant(s) seek(s) 1.81 cfs from 1 well(s) in the Willamette Basin,
 _____ subbasin

A2. Proposed use Irrigation (144.79 acres) Seasonality: March 1st – October 31st (245 days)

A3. Well and aquifer data (attach and number logs for existing wells; mark proposed wells as such under logid):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	Proposed	1	Alluvium	1.81	12S/4W-16 NE-NW	2148'N, 31'E fr SE cor DLC 53
2						
3						
4						

* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	240	NA	NA	NA	120	Unknown	Unknown	Unknown	Unknown	NA	NA	NA

Use data from application for proposed wells.

A4. **Comments:** The applicant proposes to construct one well to produce groundwater for primary irrigation of 144.79 acres.

A5. ☒ **Provisions of the** Willamette Basin rules relative to the development, classification and/or management of groundwater hydraulically connected to surface water ☐ **are**, or ☒ **are not**, activated by this application. (Not all basin rules contain such provisions.)
 Comments: The proposed POA location is not within ¼ mile of a surface water source, so pertinent basin rules do not apply.

A6. ☐ **Well(s) #** _____, _____, _____, _____, _____, tap(s) an aquifer limited by an administrative restriction.
 Name of administrative area: _____
 Comments: _____

B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

B1. **Based upon available data**, I have determined that groundwater* for the proposed use:

- a. ☐ **is** over appropriated, ☒ **is not** over appropriated, or ☐ **cannot be determined to be** over appropriated during any period of the proposed use. * This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b. ☐ **will not** or ☐ **will** likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
- c. ☐ **will not** or ☐ **will** likely to be available within the capacity of the groundwater resource; or
- d. ☒ **will, if properly conditioned**, avoid injury to existing groundwater rights or to the groundwater resource:
 - i. ☒ The permit should contain condition #(s) 7N; Large water use reporting;
 - ii. ☐ The permit should be conditioned as indicated in item 2 below.
 - iii. ☐ The permit should contain special condition(s) as indicated in item 3 below;

- B2.
- a. ☐ **Condition** to allow groundwater production from no deeper than _____ ft. below land surface;
 - b. ☐ **Condition** to allow groundwater production from no shallower than _____ ft. below land surface;
 - c. ☐ **Condition** to allow groundwater production only from the _____ groundwater reservoir between approximately _____ ft. and _____ ft. below land surface;
 - d. ☐ **Well reconstruction** is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.

Describe injury –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): _____

- B3. **Groundwater availability remarks:** Nearby LINN 10619 is the closest available source of groundwater level data, but measurements only span from 1993-2012. During this period of record, however, there is no visible trend to suggest imminent declines in the target aquifer.

The area around the proposed wells is likely underlain by approximately 20 feet of Willamette Silt which is underlain by a series of sand and gravel beds interbedded with silts and clays (Gannett and Caldwell, 1998). The water table occurs near land surface in the Willamette Silt which acts as an extensive confining unit where it is not incised by local streams.

The nearest senior groundwater right is 1,640' from the proposed POA location. Given the distance to nearby rights and the low diffusivity of the target aquifer, significant interference with senior groundwater rights is not anticipated.

C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040**C1. 690-09-040 (1):** Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Sand & Gravel	☒	☐
		☐	☐
		☐	☐
		☐	☐

Basis for aquifer confinement evaluation: Wells in the area of this proposed use report water levels somewhat higher than their respective water-bearing zones, but not significantly higher. This phenomenon may also be due to saturation of fine-grained sediments overlying the productive sands and gravels, which are not reported as “water-bearing zones” by drillers, as transmissivity in these upper horizons may be quite low.

C2. 690-09-040 (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
1	1	Muddy Creek	~220	215	4700	☒	☐	☐	☐	☒
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐

Basis for aquifer hydraulic connection evaluation: The anticipated groundwater elevation, as reported from nearby wells, is coincident with the elevation of local surface waters, including Muddy Creek. Published water table maps show that groundwater flows towards, and discharges into, perennial streams and their tributaries (Woodward et al., 1998). Despite the presence of fine-grained materials above the water-bearing zones in local wells, the movement of groundwater may be slowed but not prevented between the aquifer and surface waters.

Water Availability Basin the well(s) are located within: **WILLAMETTE R> COLUMBIA R- AB PERIWINKLE CR AT GAGE 14174**

C3a. 690-09-040 (4): Evaluation of stream impacts for each well that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water (SW) source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that SW source, not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% *natural* flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked ☒ box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < ¼ mile?	Q _w > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Q _w > 1% ISWR?	80% Natural Flow (cfs)	Q _w > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
1	1	☐	☐	NA	NA	☐	2540	☐	<<25%	☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

	SW #		Q _w > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Q _w > 1% ISWR?	80% Natural Flow (cfs)	Q _w > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
			☐			☐		☐		☐
			☐			☐		☐		☐

Comments: Interference at 30 days is anticipated to be much less than 25% of the total pumping rate proposed on this application, due to relatively high storativity and distance to local streams. The pumping rate is less than 1% of the minimum 80% exceedance flow in the month of September.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
(A) = Total Interf.													
(B) = 80 % Nat. Q													
(C) = 1 % Nat. Q													
(D) = (A) > (C)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
(E) = (A / B) x 100		%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

Basis for impact evaluation: This section does not apply.

C4b. **690-09-040 (5) (b)** The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.

- C5. ☐ **If properly conditioned**, the surface water source(s) can be adequately protected from interference, and/or groundwater use under this permit can be regulated if it is found to substantially interfere with surface water:
- i. ☐ The permit should contain condition #(s) _____;
 - ii. ☐ The permit should contain special condition(s) as indicated in "Remarks" below;

C6. **SW / GW Remarks and Conditions:** _____

References Used: _____

Local well logs, GWIS water level database, National Hydrologic Dataset

Gannett, Marshall W., and Caldwell, Rodney R., 1998, Geologic Framework of the Willamette Lowland Aquifer System, Oregon and Washington: U. S. Geological Survey Professional Paper 1424-A.

Woodward, Dennis G., Gannett, Marshall W., and Vaccaro, John J., 1998 Hydrogeologic Framework of the Willamette Lowland Aquifer System, Oregon and Washington: U. S. Geological Survey Professional Paper 1424-B.


D. WELL CONSTRUCTION, OAR 690-200


- D1. Well #: _____ Logid: _____
- D2. **THE WELL does not appear to meet current well construction standards based upon:**
- a. ☐ review of the well log;
 - b. ☐ field inspection by _____;
 - c. ☐ report of CWRE _____;
 - d. ☐ other: (specify) _____
- D3. **THE WELL construction deficiency or other comment is described as follows:** _____
- D4. ☐ **Route to the Well Construction and Compliance Section for a review of existing well construction.**

Water Availability Tables

WILLAMETTE R > COLUMBIA R - AB PERIWINKLE CR AT GAGE 14174						
Watershed ID #: 30200321			Basin: WILLAMETTE		Exceedance Level: 80	
Time: 2:14 PM					Date: 10/05/2023	
Month	Natural Stream Flow	Consumptive Use and Storage	Expected Stream Flow	Reserved Stream Flow	Instream Requirements	Net Water Available
Monthly values are in cfs. Storage is the annual amount at 50% exceedance in ac-ft.						
JAN	10,100.00	1,370.00	8,730.00	0.00	1,750.00	6,980.00
FEB	11,600.00	4,290.00	7,310.00	0.00	1,750.00	5,560.00
MAR	11,000.00	4,560.00	6,440.00	0.00	1,750.00	4,690.00
APR	9,760.00	4,260.00	5,500.00	0.00	1,750.00	3,750.00
MAY	8,430.00	2,560.00	5,870.00	0.00	1,750.00	4,120.00
JUN	5,360.00	856.00	4,500.00	0.00	1,750.00	2,750.00
JUL	3,270.00	666.00	2,600.00	0.00	1,750.00	854.00
AUG	2,560.00	604.00	1,960.00	0.00	1,750.00	206.00
SEP	2,540.00	517.00	2,020.00	0.00	1,750.00	273.00
OCT	2,860.00	270.00	2,590.00	0.00	1,750.00	840.00
NOV	4,170.00	355.00	3,810.00	0.00	1,750.00	2,060.00
DEC	8,150.00	381.00	7,770.00	0.00	1,750.00	6,020.00
ANN	7,460,000	1,240,000	6,230,000	0	1,270,000	4,960,000

Well Location Map

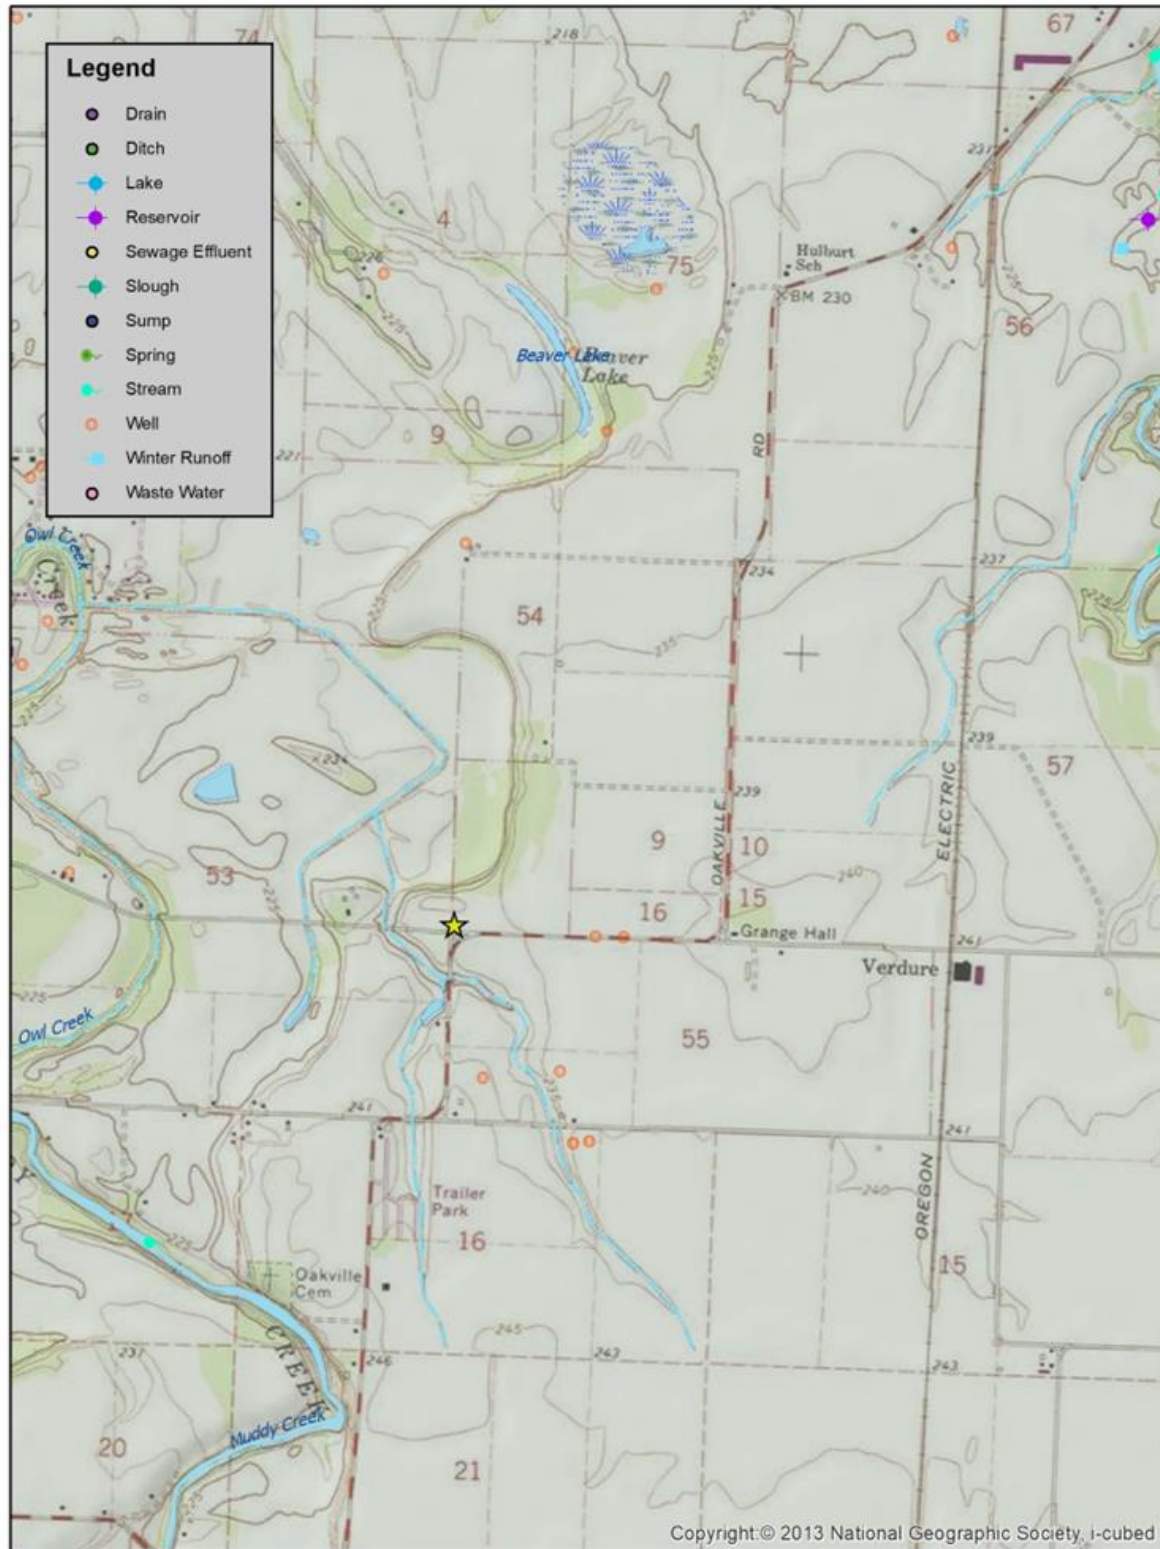

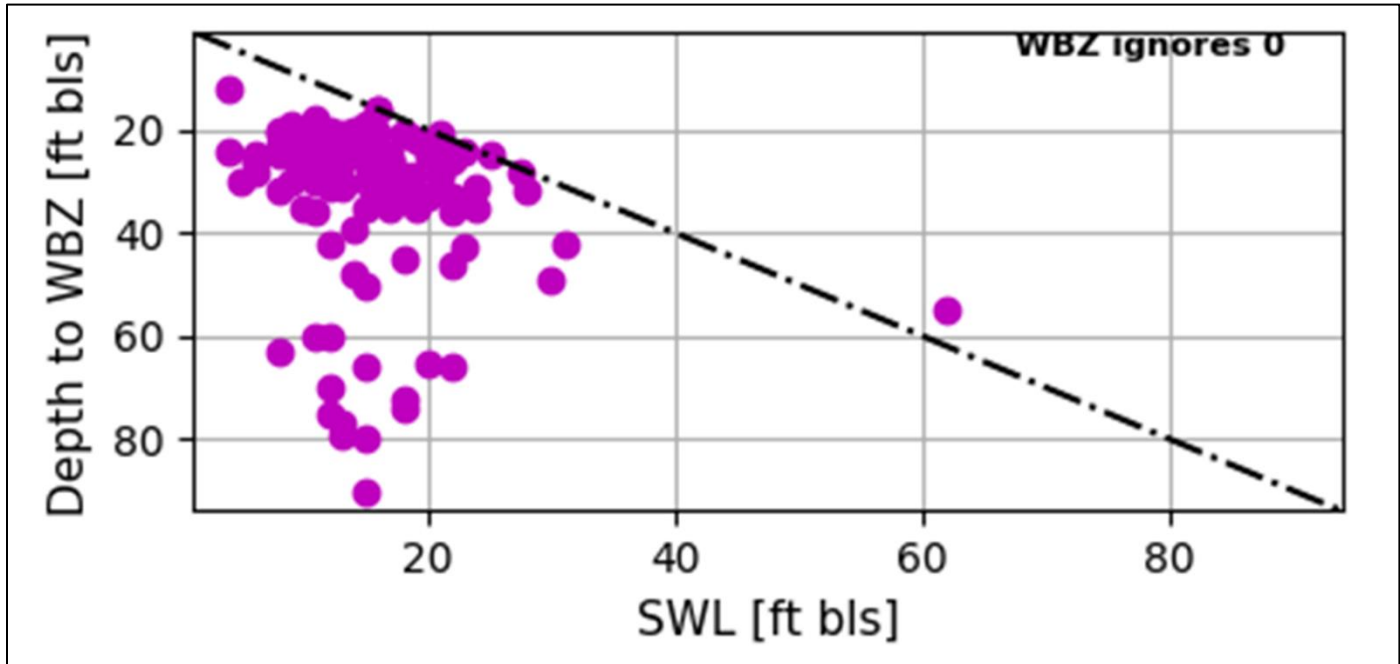Well Statistics**Water-Level Measurements in Nearby Wells**