

Application No. G G 5812Permit No. G G 6726

Certificate No. _____

Name WALTER WALDKIRCHBy Red Point RanchAddress Fields, OR 97710Stream Index, Page No. 11-30PH 495-2247707-822-4534 (Arcata, Calif)Date filed May 30, 1972Priority November 10, 1972Action suspended until Summary

Return to applicant _____

Date of approval JUN 23 1976**CONSTRUCTION**Date for beginning JUN 23 1977Date for completion OCT 1 1977

Extended to _____

Date for application of water OCT 1 1978Extended to 10-1-79**PROSECUTION OF WORK**Form "A" filed startedForm "B" filed Nov. 14, 1977Form "C" filed Feb 25, 80**FINAL PROOF**

Blank mailed _____

Proof received _____

Date certificate issued _____

FEES PAID

Date	Amount	Receipt No.
<u>5-30-72</u>	<u>31.50</u>	<u>285.32</u>

\$1 Cert. Fee

FEES REFUNDED

Date	Amount	Check No.

ASSIGNMENTS

Date	To Whom	Address	Volume	Page

REMARKSCard for B OCT 5 1977Card for C OCT 23 1978Card for C OCT 24 1979

Form B

Application No. G-5812

NOTICE OF COMPLETION OF CONSTRUCTION

I, Walter Waldkirch, the holder of Permit No. G6726

to appropriate the public waters of the state of Oregon, completed the construction of the works described
therein on the 28th day of July, 1977

Remarks: _____
If the works have less capacity than described in the permit, or you have definitely abandoned part of the proposed development, you
should so state in order that our records may not be unnecessarily encumbered.

IN WITNESS WHEREOF, I have hereunto set my hand this 8th day of November, 1977
Walter Waldkirch Red Point Ranch, Fields, Oregon 97710
(Signature of Applicant) (Address)

Fill out, detach and mail to the State Engineer, Salem, Oregon 97310, when construction work is completed.

RECEIVED
NOV 14 1977
WATER RESOURCES DEPT
SALEM, OREGON

OK
2/2/77

no log

no bond

recommend hold permit until until complies
with the law.

11/6/72

RH

10/5/73

Log and bond were filed on Dec. 20, 1972. The
well was not constructed in conformance with well
standards and must be repaired. Recommend that
permit not be issued until completion of required
repairs.

WJH

1/22/74

no response from the landowner. Hold permit.

WJH

5/28/76


well sealed. Recommend issuance of permit.

WJH

Harney Co.


TWP. 40 S., RNG. 35 E. W.M.

N SECTION 36

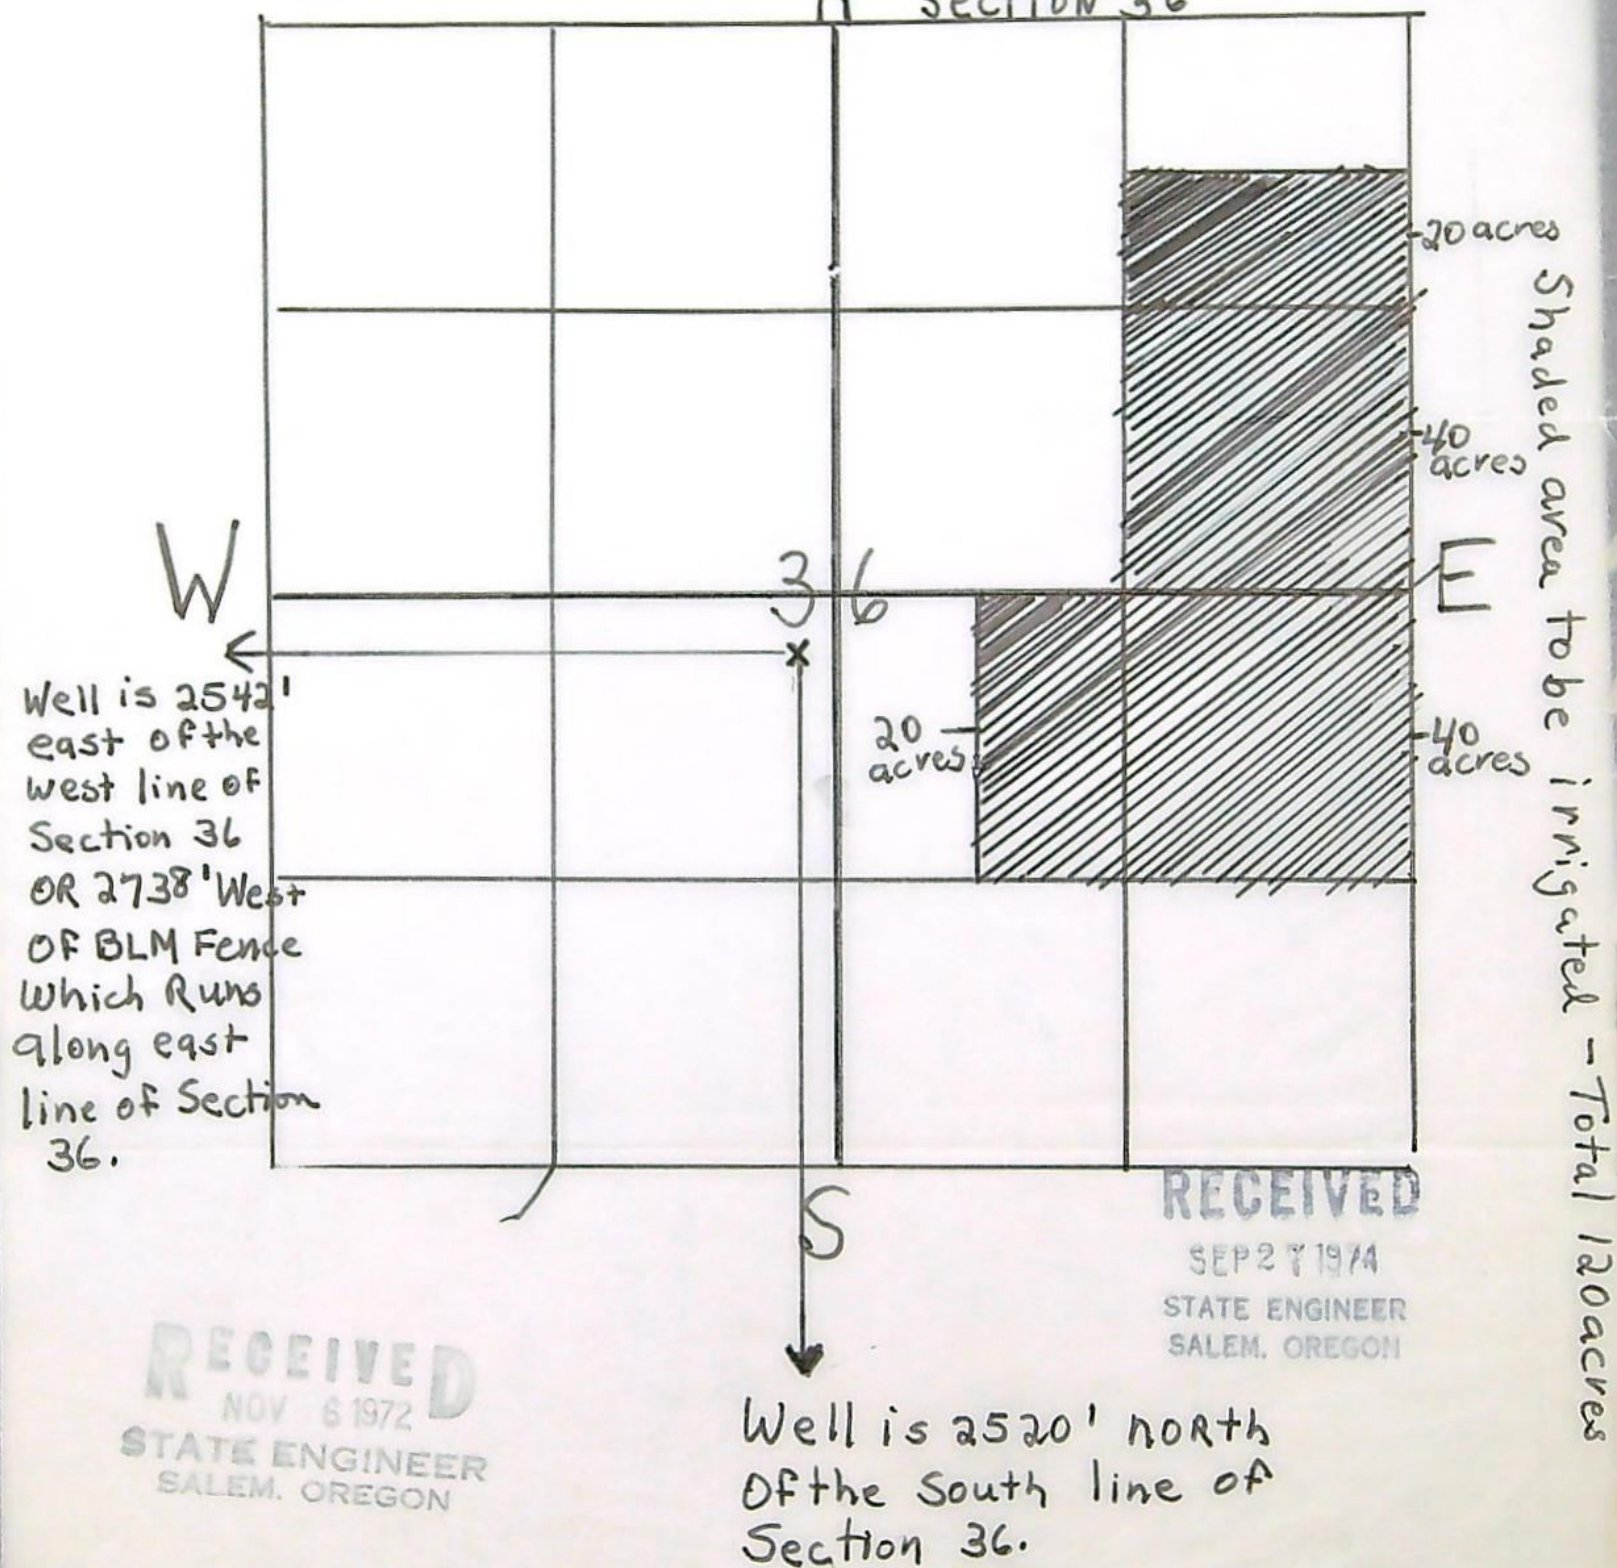

Application No. G 5812
Permit No. G 6726

measure 6" to one mile



Water Resources Department

MILL CREEK OFFICE PARK

555 13th STREET N.E., SALEM, OREGON 97310

PHONE (503) 378-3966
1-800-452-7813

April 16, 1980

Walter Walkkirch
Redpoint Rance
Fields, OR 97710

Dear Mr. Walkkirch:

REFERENCE: File #5812

We received your letter of February 21, 1980 regarding your intention to reduce the usage under your permit G6726 to 50 acres of land to be irrigated rather than the 120 acres you filed on. There is no form for this purpose. We will automatically reduce the acreage upon completion of the final proof survey when they find the reduced amount of use.

You informed us a year ago on your extension application that you had irrigated 50 acres so we are accepting this letter in lieu of the form C noted on the reminder sent you earlier. No further action will be required on your part at this time except to continue using the water. A survey will be made when we have a crew working in your area on a number of permits. In the meantime the permit which you hold is valid evidence of the right to the use of water.

Sincerely yours,

Bruce A. Estes
Supervisor,
Survey-Certificate Section

BAE:avs
0606A
cc: File copy

C O P Y

RECEIVED

FEB 25 1980

WATER RESOURCES DEPT
SALEM, OREGON

Red Point Ranch
Fields, Oregon 97710
February 21, 1980

Water Resources Department
Mill Creek Office Park
555 13th Street N.E.
Salem, Oregon 97310

File No. G-5812
Permit No. G-6726

Att: Mr. Bruce A. Estes, Supervisor

Dear Mr. Estes:

In regard to the above Permit No. G-6726 we would like the form for permission to revise this permit to read 50 acres irrigated rather than 120 acres.

We also have misplaced your Form C and would appreciate a duplicate. We thank you in advance for these forms.

Very truly yours,

Walter Waldkirch

Walter Waldkirch

WW

OK C
p/h

Abstract of Permit No. G-6726

Application No. G-5812

Certificate No.

Name Walter Waldkirch

Address Fields, Oregon

Source of water supply Mary's Well No. 2

Use Irrigation

Point of diversion 2520' N & 2542' E from SW cor., sec. 36, being within NE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 36, T.40S., R.35E., W.M.; Harney County

Number of acres ~~120~~
911 50 ac from "C"

DESCRIPTION OF LAND TO BE IRRIGATED OR PLACE OF USE

Twp.	Range	Sec.	NE $\frac{1}{4}$				NW $\frac{1}{4}$				SW $\frac{1}{4}$				SE $\frac{1}{4}$			
			NE $\frac{1}{4}$	NW $\frac{1}{4}$	SW $\frac{1}{4}$	SE $\frac{1}{4}$	NE $\frac{1}{4}$	NW $\frac{1}{4}$	SW $\frac{1}{4}$	SE $\frac{1}{4}$	NE $\frac{1}{4}$	NW $\frac{1}{4}$	SW $\frac{1}{4}$	SE $\frac{1}{4}$	NE $\frac{1}{4}$	NW $\frac{1}{4}$	SW $\frac{1}{4}$	SE $\frac{1}{4}$
40 S	35 E	36	20			40									40		20	

Priority date November 6, 1972

Amount of water 1.5 c.f.s.

Time limit to begin construction 6-23-77

Time limit to complete construction 10-1-77 extended to extended to

Time limit to completely apply water 10-1-78 extended to extended to

Remarks: Limitations: 1/80th c.f.s., 3 a.f.

Linn Sun Creek Well

Basin 11, Volume 1A

cgm



Water Resources Department

MILL CREEK OFFICE PARK

555 13th STREET N.E., SALEM, OREGON 97310

PHONE 378-8508

File G-5812

January 12, 1979

Walter Waldkirch
Red Point Ranch
Fields, OR 97710

Dear Mr. Waldkirch,

Your application for an extension of the time limit in which to make complete application of water under the terms of your permit number G-6726 has been received. We also have your check in the amount of \$10.00

The application indicates reasonable diligence has been exercised toward completion of the proposed project; therefore, the time limit in which to make complete application of water is being extended October 1, 1979.

Sincerely,

Bruce A. Estes, Supervisor
Survey-Certificate Section

BAE:jt
Encl. Receipt 8389

Application for Extension of Time

RECEIVED

JAN 8 1979

WATER RESOURCES DEPT.
SALEM, OREGON

TO THE WATER RESOURCES DIRECTOR OF OREGON

I, Walter Waldkirch

Name

Red Point Ranch

Mailing Address

Fields

City

Oregon

State

97710

Zip

record owner of water right permit No. G-6726, do hereby request that the time in which to:

☐ complete the construction of works and/or purchase and installation of the equipment necessary to the use of water, which time now expires on October 1, 19....., be extended to October 1, 19.....; and/or the time in which to

☒ accomplish beneficial use of water to the full extent now intended under the terms of said permit, which time now expires on October 1, 19⁷⁸, be extended to October 1, 19⁷⁹.

I have accomplished the following described works and/or purchase and installation of equipment necessary to the use of water under said permit:

within the past year Planted and irrigated 50 acres

prior to this past year Drilled the well, bought pump, installed pipe line, and
cleared approximately 50 acres

and have accomplished beneficial use of water to the extent of (IF FOR IRRIGATION, STATE HOW MANY ACRES HAVE BEEN IRRIGATED) 50 acres

(If additional space is required, attach separate sheet)

Walter Waldkirch

(If signing for a corporation please identify your title)

Dated January 4, 1979MAIL COMPLETED APPLICATION AND STATUTORY FEE
OF \$10.00 TO:

Water Resources Department
Mill Creek Office Park
555 13th Street, N.E.
Salem, Oregon 97310

C-1-79
DAR10.00
8389
1/8/79
Cfm

PHONE 378-8508

December 8, 1978

Walter Waldkirch
Red Point Ranch
Fields, OR 97710

File No. G-5812

Dear Mr. Waldkirch

I am enclosing a form for use in making application for an extension of time limits under permit number G-6726

The Water Resources Director is permitted by law to extend the time for completion of a project only upon a showing of reasonable diligence by the permittee. Therefore, you should fill out this application carefully and completely describing what has been accomplished.

The application must be ~~executed before a notary public and~~ submitted to this office with the statutory filing fee in the amount of \$10.00 for each permit.

Sincerely,



Bruce A. Estes, Supervisor
Certificate-Survey Section

RECEIVED
DEC 4 1978
WATER RESOURCES DEPT.
SALEM, OREGON

Red Point Ranch
Fields, Oregon 97710
November 29, 1978

Water Resources Department
Mill Creek Office Park
555 13th Street N. E.
Salem, Oregon

File No. G-5812

Gentlemen:

We have received your card of October 23, 1978 regarding our Permit No. G-6726. We would like to apply for an extension of time on the above named permit number for appropriation of water as we have not applied the water on all of the property that we applied for.

Very truly yours,


Walter Waldkirch

Walter Waldkirch

Fields, Oregon
TWP. 40 S., RNG. 35 E.W.M.

Harney Co.

N SECTION 36

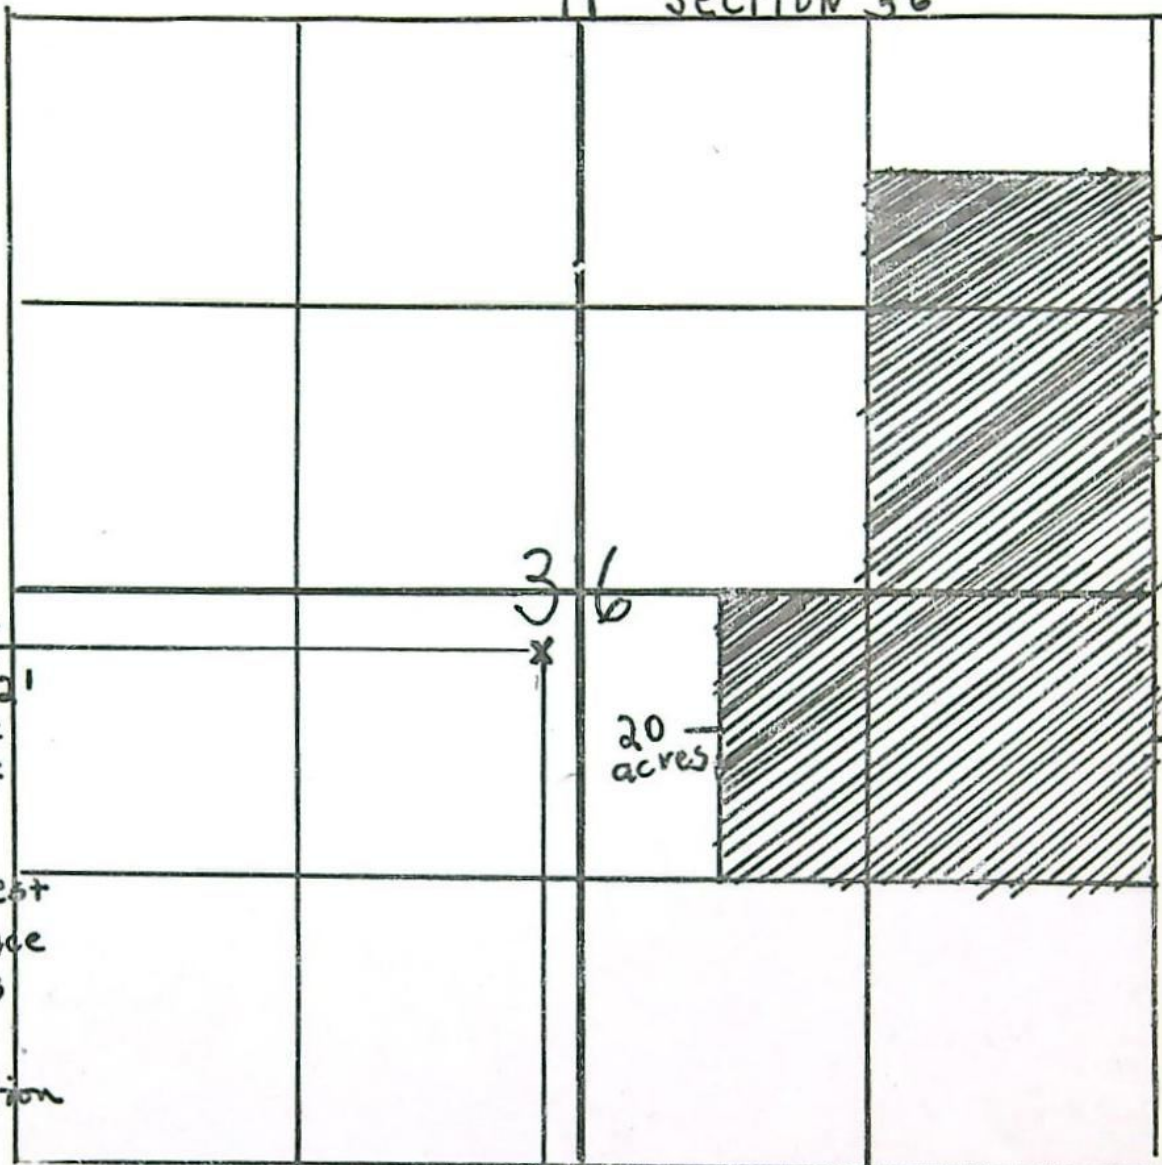

Shaded area to be irrigated - Total 120 acres

Well is 2542'
east of the
west line of
Section 36
OR 2738' West
of BLM Fence
which runs
along east
line of Section
36.

Well is 2520' north
of the South line of
Section 36.

RECEIVED
SEP 27 1974
STATE ENGINEER
SALEM, OREGON

RECEIVED
NOV 8 1972
STATE ENGINEER
SALEM, OREGON

Application No. G 5812
Permit No. G 6726

measure 6" to one mile

Based
report

Do you want
permit held up
for ltr 11-7-72
WSB?

Yes at least on 10/8 &
Report. & Bond have been filed
but will apparently require
to not need hold for
check. E.

Hold
for
T-J

Walter Waldkirch
Fields, OR 97710

August 11, 1976

G-5812

G-6726 with map.

October 24, 1974

G-5812

Walter Waldkirch
Fields, OR 97710

Dear Mr. Waldkirch:

We have recently received your corrected application numbered G-5812 along with the reproducible map.

It is now in satisfactory form for approval by issuance of a permit.

Very truly yours,

THOMAS E. SHOOK
Assistant

TES:cdp

July 30, 1974

G-5812

Walter Waldkirch
Fields, OR 97710

Dear Mr. Waldkirch:

Your application numbered G-5812 has been received along with your reproducible map.

The location of your well must be further located, on line 5 of item 4 of your application, as being within a forty acre tract of Section 36, Township 40 South, Range 35 East, W.M. Based on the description of the location of your well as given in this item and shown on your map, this would be the NE $\frac{1}{4}$ SW $\frac{1}{4}$ of Section 36. If you agree, please amend your application accordingly.

We still have not had a response from you regarding the date you intend to repair your well. Will you please advise this office of your proposed repair date so that the State Engineer's representative may witness the work.

I am returning your reproducible map and the application for correction and completion. The application is endorsed so that in order to retain its priority date, it must be received in this office on or before September 30, 1974.

Very truly yours,

THOMAS E. SHOOK
Assistant

TES:cdp
Enclosures

April 16, 1974

G-5812

Walter Waldkirch
Fields, OR 97710

Dear Mr. Waldkirch:

We have been holding action on your application numbered G-5812 pending receipt of the information as requested in Mr. McCall's letter of January 22, 1974.

Will you please advise us as to the progress being made toward correcting the deficiencies of your well or when you expect to repair it.

Very truly yours,

90

THOMAS E. SHOOK
Assistant

TES: cdp

9/2
January 22, 1974

Mr. Walter Waldkirch
Fields, Oregon 97710

RE: Application No. G-5812

Dear Mr. Waldkirch:

We have not had a response from you regarding our letter of October 8, 1973 in connection with the required repair of your irrigation well under the above referenced application. As stated in the aforementioned letter, it will be necessary under Oregon Ground Water Law to repair the subject well in accordance with Oregon's well construction standards.

Please notify this office of the proposed repair date so that we may have an inspector present to observe the repairs.

We are continuing to withhold action for the issuance of a permit to appropriate water from this well until the required repairs are completed to the satisfaction of this office.

Very truly yours,

WILLIAM B. McCALL
Hydrogeologist

WBM:cjw

October 8, 1973

Mr. Walter Walckirch
Fields, Oregon 97710

RE: ^{App 1} Permit No. G-5812

Dear Mr. Walckirch:

During review of your application to appropriate ground water, number G-5812, it was noted that a water well report describing the construction of your irrigation well has been submitted to this office. It is also noted that Landowner's Water Well Bond No. 220 53 06 issued by the Western Surety Company has also been filed in compliance with Oregon's Ground Water Law.

A review of the water well report indicates that your well was cased with 14-inch diameter casing to its total depth of 170 feet. According to the log, the annular space was sealed to a depth of 1 foot below land surface with cement. It is apparent from the water well report that the subject well was not constructed in conformance with state well standards. Well construction standards require that an oversize drillhole at least 3 inches larger than the diameter of the casing be constructed at least 5 feet into an impermeable stratum overlying the water producing formation and that the annular space be filled from that point to land surface with either cement grout or bentonite. From the description of the lithology submitted on the well report it would be necessary to extend the required oversize drillhole in this particular well to a depth of at least 30 feet below land surface. We therefore request that the subject well be repaired immediately to conform to state well standards.

Please notify this office of the proposed repair date of the well and proposed repair methods. If necessary, a representative from this office will be present to observe repair operations.

I am recommending to the State Engineer that a permit to appropriate ground water from the well not be issued until the required repairs are completed to the satisfaction of this office.

Walter Waldkirch

-2-

October 8, 1973

Should you have any questions regarding this matter, please contact us.

Very truly yours,

WILLIAM B. McCALL
Hydrogeologist

WEM:cjw

November 7, 1972

Mr. Walter Waldkirch
Fields,
Oregon 97710

Dear Mr. Waldkirch:

We are writing to you again regarding your irrigation well located in Section 36, Township 40 South, Range 35 East. We are in receipt of your Application No. G-5812 for a permit to appropriate ground water from the subject well. You will recall that on May 4, 1972, I wrote to you and enclosed a copy of Oregon state statutes which requires you to file a landowner's bond prior to the construction of the subject well. To date, this office has not received a copy of the completed bond. I am enclosing another bond form for your use. Also enclosed is a water well report form.

I am recommending to the State Engineer that a permit should not be issued for this application until the required landowner's bond and completed water well report is received by this office for the subject well. Please complete the enclosed water well report and forward the first two copies to this office.

Very truly yours, .

WM. S. BARTHOLOMEW
Hydrogeologist

WSB:cjw
Enclosures

November 3, 1972

RECEIVED
NOV 6 1972
STATE ENGINEER
SALEM, OREGON

State Engineer
Water Resources Dept.
1178 Chemeketa Street N.E.
Salem, Oregon 97310

Attention: Mr. Thomas E. Shook

File No. G-5812

Gentlemen:

We have received your letters of July 18, 1972 and September 22, 1972. Enclosed please find our corrected map and application for use of ground water. Your letter of July 18 had been misplaced by our hired man.

This well was constructed by me with my own drilling outfit. The construction of this well was started on May 2, 1972 and was completed on July 14, 1972.

We hope that the map and application are now correct. We are sorry that we did not find these papers until last week.

Very truly yours,

Walter Waldkirch
Walter Waldkirch

WW/mj
enc-2

G-5812

September 22, 1972

Walter Waldkirch
Fields, OH 97710

Dear Sir:

Regarding your letter of September 18, 1972, I have enclosed a copy of my earlier correspondence along with a blank application form.

Please note that your application was mailed to you on July 18, 1972. In the event the original application has been lost, you may submit a superseding application; however, a new priority date will be established when the superseding application is received in this office.

If we can be of further assistance, *do* not hesitate to contact us.

Very truly yours,

Thomas E. Snook
Assistant

TLS:bjs
Enclosure

Fields, Oregon
September 18, 1972

RECEIVED
SEP 21 1972
STATE ENGINEER
SALEM, OREGON

State Engineer
Water Resources Department
1178 Chemeketa Street N.E.
Salem, Oregon 97310

File No. G-5812

Attention: Mr. Thomas E. Shook, Assistant

Gentlemen:

We have received your letter of September 12, 1972. To date we have not received our application back from your office. We are assuming that you numbered our application G-5812 the one we sent in on May 25, 1972.

Would you please tell us what we should do, in case our application has been lost in the mail from your office to Fields? We have been wondering why we have not heard from the State Engineer's office.

An early reply will be greatly appreciated.

Very truly yours,



Walter Waldkirch

G-5812

September 12, 1972

Walter Waldkirch
Fields
OR 97710

Dear Sir:

Your application numbered G-5812, which was returned to you for correction and completion, endorsed so that in order to retain its date of priority should have been received in this office on or before September 11, 1972, has not been received.

It has, therefore, lost its priority, but may be reinstated and given a new priority date as of the day it is again received.

Very truly yours,

Thomas E. Shook
Assistant

TES:bjs

July 18, 1972

G-5812

Mr. Walter Waldkirch
Fields
OR 97710

Dear Mr. Waldkirch:

This will acknowledge your application for a permit to appropriate 1500 gallons of water per minute from Mary Well Number 2 for the irrigation of 120 acres, a reproducible map, and the fees in the amount of \$31.50 for which our receipt numbered 28532 is enclosed. This application has been filed and numbered G-5812.

Please amend Item Number 3 of the application by deleting the information given and inserting "irrigation".

The government survey corner, listed in Item Number 4, to which the well is referenced does not agree with the information given on the map. If the map is correct, the government survey corner should be labeled the Southwest corner of Section 36 rather than the Northeast corner of the Southwest quarter of Section 36. It is also necessary to further describe the location of the well as being within a forty-acre tract and if the well is located correctly on the map, line five should be completed by listing the NE $\frac{1}{4}$ SW $\frac{1}{4}$ of Section 36, Township 40 South, Range 35 East, W. M.

Please complete Item Number 10 by giving a general description of the pump.

The map of your proposed project must be prepared in black ink. For clarification, the scale to which the map has been drawn must also be included on the map, along with inserting the number of acres to be irrigated within the hatchured area for each quarter-quarter section. It is necessary that this data correspond with the information that is given in Item Number 12 of the application.

Mr. Walter Waldkirch

Page 2

July 18, 1972

We do not have a record of a well at the location described on your application. Will you please send us the name and address of the well driller or contractor and the date the well was constructed.

I am returning the reproducible map and application for correction and completion. The application is endorsed so that in order to retain its priority date, it must be received in this office on or before September 11, 1972.

Very truly yours,

THOMAS E. SHOOK
Assistant

dg
Enclosures

Survey
5-30-72

Application No. **G 5812**
Permit No. **G 6726**

Name **Walter Waldkirch**
Address **Fields, OR 97710**
Assigned :
Address :
Beginning construction **JUN 23 1977**
Completion of construction **OCT 1 1977**
Extended to :
Complete application of water **OCT 1 1978**
Extended to **10-1-79**