
					Page 1 of 2
STATE OF OREGON	KLAM	58281	WELL I.D. LABEL# L	105421	
WATER SUPPLY WELL REPORT			START CARD #	1017528	
(as required by ORS 537.765 & OAR 690-205-0210)	10/10	/2012	ORIGINAL LOG #		
(1) LAND OWNER Owner Well I.D.					
First Name Last Name	· ·	(9) LOCA	FION OF WELL (legal de	escription)	
Company KLAMATH COUNTY SCHOOL DISTRICT			ATHTwp_39.00SN/S	-	E E/W WM
Address 10501 WASHBURN WAY			<u>NW</u> 1/4 of the <u>SW</u>		
City KLAMATH FALLS State OR Zip 97603		Tax Map Numi	her	Lot	
	version	Lat °	ber or		DMS or DD
Alteration (complete 2a & 10) Abandonment(co	omplete 5a)	Long°	' or		DMS or DD
(2a) PRE-ALTERATION Dia + From To Gauge Stl Plstc Wld Thrd			treet address of well (•) Nea	rest address	
		\sim	VE. BONANZA,OR		
Material From To Amt sacks/lbs					
Seal:					
(3) DRILL METHOD		(10) STATI	IC WATER LEVEL		
Rotary Air Rotary Mud Cable Auger Cable Mud		Existing V	Date Vell / Pre-Alteration	SWL(psi) +	SWL(ft)
Reverse Rotary Other		Completed	d Well 9/11/2012	-+ =}	38
(4) PROPOSED USE Domestic Irrigation Community	1		Flowing Artesian?	Dry Hole?	50
Industrial/ Commercial Livestock Dewatering		WATED BEAD	RING ZONES Depth wat		3.00
Thermal XInjection Other		SWL Date	I		
			From To Est 1	Flow SWL(psi)	· SWL(II)
(5) BORE HOLE CONSTRUCTION Special Standard (Attach copy)	9/11/2012	38 200 15	500	38
Depth of Completed Well 200.00 ft. BORE HOLE SEAL	1 /				
	sacks/ Amt lbs				
	20 S	1			
	105 S				
7.5 61 200		(11) WELL	LOC		
			LOG Ground Elevation		
How was seal placed: Method $\square A \square B \times C \square D$	E	TOD CON	Material	From	To
Other		TOP SOIL YELLOW CL	٨V	0 3	3 22
Backfill placed from ft. to ft. Material		BROWN SAN		22	36
Filter pack from ft. to ft. MaterialSize _		BLACK SAN		36	38
Explosives used: Yes Type Amount			/N,& RED BASALT	38	53
(5a) ABANDONMENT USING UNHYDRATED BENTONI	ТЕ	GREY BASA	LT	53	61
Proposed Amount Actual Amount			REY BASALT	61	72
(6) CASING/LINER		GREY BASA		92	<u>92</u> 110
Casing Liner Dia + From To Gauge Stl Plstc		RED CINDER	OWN BASALT	110	125
● <u>10.75</u> <u>3.5</u> <u>61</u> <u>.250</u> ● <u></u>		GREY BASA		125	140
6 50 200 .250 • •	\mathbf{X}	RED CINDER		140	156
	\vdash	GREY & BRC	OWN BASALT- BROKEN	156	200
	\vdash				
Shoe \mathbf{X} Inside Outside Other Location of shoe(s) 2(
Temp casing Yes Dia From To					
(7) PERFORATIONS/SCREENS Perforations Method holt- down hole					
Screens Type Material		Date Started	18/23/2012 Comp	olete 9/11/2012	
Perf/ Casing/ Screen Scrn/slot Slot # of	Tele/				
Screen Liner Dia From To width length slots		· · · · · · · · · · · · · · · · · · ·	Vater Well Constructor Certific		
Perf Liner 6 61 196.5 .188 3 2340)	2	the work I performed on the cor	· 1 ·	<i>U</i> , ,
			of this well is in compliance tandards. Materials used and info		
			knowledge and belief.	simulation reported a	
		License Numb	-	te	
(8) WELL TESTS: Minimum testing time is 1 hour					
Pump Bailer Air Flowing A	rtesian	Signed			
<u></u>		(bonded) Wat	er Well Constructor Certificati		
1000 100 4		, ,	nsibility for the construction, de		or abandonment
550 0 105 4			ed on this well during the construction, de		
		performed du	ring this time is in compliance	e with Oregon wat	er supply well
Temperature 60 °F Lab analysis Yes By			andards. This report is true to the		
Water quality concerns? Yes (describe below) TDS amount	License Numb	Der 1844 Dat	te 10/10/2012		
From To Description Amount	Units				
	+		LTER CHANCELLOR (E-filed)		
		Contact Info (o	optional) CHANCELLOR DRILL	LING & PUMP	
		1			

ORIGINAL - WATER RESOURCES DEPARTMENT THIS REPORT MUST BE SUBMITTED TO THE WATER RESOURCES DEPARTMENT WITHIN 30 DAYS OF COMPLETION OF WORK Form Version:

WATER SUPPLY WELL REPORT -

continuation page

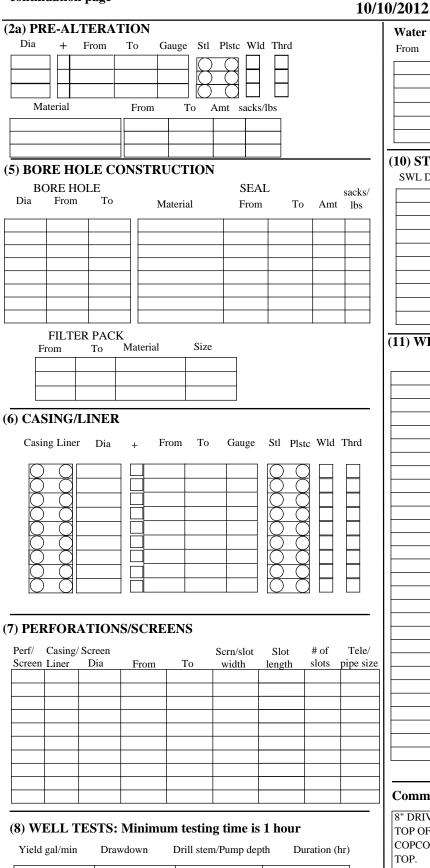

WELL I.D. LABEL# L 105421 START CARD # 1017528

ORIGINAL LOG

Water Quality Concerns

KLAM 58281

From	То	Description	Amount	Units

(10) STATIC WATER LEVEL

SWL Date	From	То	Est Flow	SWL(psi)	+	SWL(ft)
					_	
			L			

(11) WELL LOG

Material	From	То
	•	

Comments/Remarks

8" DRIVE SHOE UPSIDE DOWN WELDED TO 8-6 BELL REDUCER ON TOP OF 6" LINER AT 50'. 6" UNDERREAMING SHOE IS A 140 ATLAS COPCO. WELL HAS A BAKER 3.5' BURY PITLESS UNIT WELDED ON TOP.