

LAKE 50703

RECEIVED

NOV 27 1998

STATE OF OREGON WATER SUPPLY WELL REPORT (as required by ORS 537.765)

WATER RESOURCES DEPT. SALEM, OREGON

WELL I.D. # L 19876 START CARD # 107322

Instructions for completing this report are on the last page of this form.

(1) OWNER: Well Number #1 Name LAKEVIEW SUBURBAN DOMESTIC WATER SUPPLY DIST. Address PO BOX 1262 City LAKEVIEW State OREGON Zip 97630

(2) TYPE OF WORK [X] New Well [] Deepening [] Alteration (repair/recondition) [] Abandonment

(3) DRILL METHOD: [] Rotary Air [X] Rotary Mud [] Cable [] Auger [] Other

(4) PROPOSED USE: [] Domestic [X] Community [] Industrial [] Irrigation [] Thermal [] Injection [] Livestock [] Other

(5) BORE HOLE CONSTRUCTION: Special Construction approval [] Yes [X] No Depth of Completed Well 460 ft. Explosives used [] Yes [X] No Type Amount

Table with columns: HOLE Diameter, From, To, SEAL Material, From, To, Sacks or pounds. Includes handwritten entries for 18" and 12 1/4" diameters.

How was seal placed: Method [] A [] B [X] C [] D [] E [] Other Backfill placed from 200 ft. to 400 ft. Material Gravel placed from 200 ft. to 400 ft. Size of gravel #6/#8

(6) CASING/LINER: Table with columns: Diameter, From, To, Gauge, Steel, Plastic, Welded, Threaded. Includes handwritten entry for 10 1/4" casing.

Final location of shoe(s) 381 FT.

(7) PERFORATIONS/SCREENS: Table with columns: From, To, Slot size, Number, Diameter, Tele/pipe size, Casing, Liner. Includes handwritten note 'SEE ATTACHED SHEETS'.

(8) WELL TESTS: Minimum testing time is 1 hour. [X] Pump [] Bailer [] Air [] Flowing Artesian. Yield gal/min 400, Drawdown 58 FT, Time 2 1/2 hr.

Temperature of water 66.0 F Depth Artesian Flow Found Was a water analysis done? [] Yes By whom Did any strata contain water not suitable for intended use? [] Too little [] Salty [] Muddy [] Odor [] Colored [] Other Depth of strata:

(9) LOCATION OF WELL by legal description: County LAKE Latitude Longitude Township 38S N or S Range 20 E or W. WM. Section 32 SE 1/4 SE 1/4 Tax Lot 38 Lot 20 Block 32 Subdivision 900 Street Address of Well (or nearest address) 1250 FT WEST FROM INTERSECTION LAKE COUNTY RD 218-A & 218

(10) STATIC WATER LEVEL: 13 1/2 ft. below land surface. Date 11/10/98 Artesian pressure lb. per square inch. Date

(11) WATER BEARING ZONES: Depth at which water was first found 8 FEET

Table with columns: From, To, Estimated Flow Rate, SWL. Includes handwritten entry: From 200 To 400 Estimated Flow Rate 400 SWL 13 1/2

(12) WELL LOG: Ground Elevation

Table with columns: Material, From, To, SWL. Includes handwritten note 'SEE ATTACHED LOG'.

Date started OCT 13, 98 Completed OCT 20, 98

(unbonded) Water Well Constructor Certification: I certify that the work I performed on the construction, alteration, or abandonment of this well is in compliance with Oregon water supply well construction standards. Materials used and information reported above are true to the best of my knowledge and belief.


Signed _____ Date _____ WWC Number _____

(bonded) Water Well Constructor Certification: I accept responsibility for the construction, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon water supply well construction standards. This report is true to the best of my knowledge and belief.

Signed _____ Date 11/21/98 WWC Number 606

STOREY DRILLING SERVICES

P.O. Box 98 • MIDLAND, OREGON 97634
(541) 884-3990 • (800) 245-8122
Fax #: (530) 528-2562
22560 ADOBE ROAD • RED BLUFF, CALIFORNIA 96080
CONTRACTOR'S LICENSES:
OR #601 • CA #583153 • NV #38199

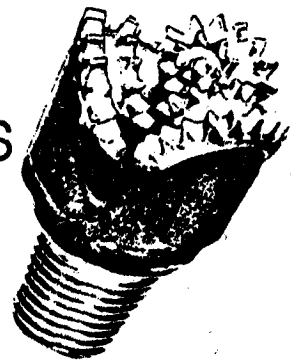

Lakeview Suburban Domestic Water Supply District
P. O. Box 1262
Lakeview, Oregon 97630

START: October 13, 1998
FINISH: November 20, 1998

WELL LOCATION ½ mile west of Highway 395 on Lake County Road 218-A Lakeview, Oregon
SW¼ SW¼ S32 T38 R20 in Lake County, Oregon

LOG

0 - 2	Brown clay topsoil
2 - 3	Sandy clay with fine gravel
3 - 10	Fine gravel & brown clay
10 - 24	Brown clay
24 - 26	Coarse black sand
26 - 36	Grey clay with black sand
36 - 77	Sandy grey clay
77 - 85	Grey clay with coarse sand
85 - 96	Grey clay
96 - 116	Grey clay with fine gravel
116 - 168	Grey clay
168 - 170	Medium gravel with grey clay
170 - 190	Fine gravel
190 - 207	Fine gravel with sandy grey clay
207 - 223	Sandy grey clay
223 - 225	Medium gravel with grey clay
225 - 247	Coarse sand with grey clay
247 - 277	Grey clay with coarse sand and streaks of hard white ash
277 - 292	Grey clay with streaks coarse sand
292 - 357	Medium gravel with grey clay and coarse sand
357 - 365	Grey clay
365 - 367	Grey clay with medium gravel
367 - 428	Grey clay

RECEIVED

NOV 27 1998

WATER RESOURCES DEPT.
SALEM, OREGON

10 3/4 O. D. x .250 wall steel casing with Roscoe Moss spiral weld 1/16 inch (0.0625 inch) Ful-Flo Louvered Pipe set at 381 feet as follows:

+2 - 222 feet	solid steel casing
222 - 232 feet	Louvered pipe
232 - 240 feet	solid steel casing
240 - 300 feet	Louvered pipe
300 - 310 feet	solid steel casing
310 - 370 feet	Louvered pipe
370 - 381 feet	solid steel casing

18 inch diameter hole from 0 to 400 feet; 12¼ inch diameter hole from 400 - 428 feet.

3 inch diameter thread & coupled gravel shute from +1 to 209 feet.

Well packed by tremie pipe from 200 feet to 400 feet with Silica Resources blend of #6 & #8 gravel.

Cement sanitary seal from 0 to 200 feet.

Temperature 66 ° Fahrenheit; 0.6 PPM Iron 2 Grains Hardness Static water level at 13½ feet.

Well Test Pumped 400 GPM at 58 feet; Total dissolved solids 530 PPM; Sand content < 5 PPM.