

"
**Water Right Conditions
Tracking Slip**

Groundwater/Hydrology Section

FILE # # G-17649

ROUTED TO: Water Rights - Kerry

TOWNSHIP/

RANGE-SECTION: 24S/30E-36 ca

CONDITIONS ATTACHED?: ☒ yes ☐ no

REMARKS OR FURTHER INSTRUCTIONS:

Reviewer: Mike Zwart

[illegible]

PUBLIC INTEREST REVIEW FOR GROUND WATER APPLICATIONS

TO: Water Rights Section Date June 26, 2013

FROM: Ground Water/Hydrology Section Mike Zwart
Reviewer's Name

SUBJECT: Application G- 17649 Supersedes review of _____
Date of Review(s)

PUBLIC INTEREST PRESUMPTION; GROUNDWATER

OAR 690-310-130 (1) *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525. Department staff review ground water applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. This review is based upon available information and agency policies in place at the time of evaluation.*

A. GENERAL INFORMATION: Applicant's Name: Mike Peila County: Harney

A1. Applicant(s) seek(s) 1.3 cfs from 1 well(s) in the Malheur Lake Basin,
Silvies River subbasin Quad Map: Dog Mountain

A2. Proposed use: Irrigation, 80 acres Seasonality: March 1-October 31

A3. Well and aquifer data (attach and number logs for existing wells; mark proposed wells as such under logid):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	HARN 51332	3	Valley fill/Volc sed	1.3	24S/30E-36 NE-SW	1450' N, 2510' E fr SW cor S 36
2						
3						
4						
5						

* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	4225	30	30	2/14/07	115	0-20	0-101	100-115	100-115	500		A

Use data from application for proposed wells.

A4. Comments: _____

A5. ☒ Provisions of the Malheur Lake Basin rules relative to the development, classification and/or management of ground water hydraulically connected to surface water ☐ are, or ☒ are not, activated by this application.
(Not all basin rules contain such provisions.)

Comments: _____

A6. ☐ Well(s) # _____, _____, _____, _____, _____, tap(s) an aquifer limited by an administrative restriction.
Name of administrative area: _____
Comments: _____

B. GROUND WATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

B1. Based upon available data, I have determined that ground water* for the proposed use:

- a. ☐ is over appropriated, ☐ is not over appropriated, or ☒ cannot be determined to be over appropriated during any period of the proposed use. * This finding is limited to the ground water portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b. ☐ will not or ☐ will likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the ground water portion of the injury determination as prescribed in OAR 690-310-130;
- c. ☐ will not or ☐ will likely to be available within the capacity of the ground water resource; or
- d. ☒ will, if properly conditioned, avoid injury to existing ground water rights or to the ground water resource:
- ☒ The permit should contain condition #(s) 7N;
 - ☐ The permit should be conditioned as indicated in item 2 below.
 - ☐ The permit should contain special condition(s) as indicated in item 3 below;

- B2. a. ☐ Condition to allow ground water production from no deeper than _____ ft. below land surface;
- b. ☐ Condition to allow ground water production from no shallower than _____ ft. below land surface;
- c. ☐ Condition to allow ground water production only from the _____ ground water reservoir between approximately _____ ft. and _____ ft. below land surface;
- d. ☐ Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Ground Water Section.

Describe injury –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): _____

B3. Ground water availability remarks: Region Manager and Groundwater Section Manager recommend use of condition 7N in this basin.

The proposed well here is about 6 miles north of a part of the Malheur Lake Basin known as Weaver Springs, which has been the subject of concern about the groundwater resource by local water users for several years. As a result, the Department selected several wells in that area for quarterly water-level monitoring. Most of those wells are clearly displaying year-to-year water-level declines. The positive findings here are based on the distance from that area of the basin and on the lack of local water-level data with an adequate period of record to conclude whether or not water levels are stable. The subject well here has been measured as part of a permit condition (G-16573) since 2010 and the water level is currently relatively stable. However, given the documented water-level declines in the Weaver Springs area, and elsewhere in the basin, and the fact that some nearby permitted groundwater rights are not yet developed, it is possible that the proposed use here will result in water-level declines that may eventually exceed one or more of the triggers in the measurement condition that is being recommended.

C. GROUND WATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040**C1. 690-09-040 (1): Evaluation of aquifer confinement:**

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Probably valley-fill deposits or volcanic, pyroclastic and sedimentary rocks (Qal and Tvs of GW Report #16)	☐	☒
		☐	☐
		☐	☐
		☐	☐
		☐	☐

Basis for aquifer confinement evaluation: The well location is mapped as Tvs, but there may be some valley-fill (Qal) deposits in the near surface materials. The static water level is the same as the depth that water was first encountered.

C2. 690-09-040 (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
1	1	Sage Hen Creek	4195	4123	12000	☒	☐	☐	☐	☒
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐

Basis for aquifer hydraulic connection evaluation: The aquifer is likely indirectly connected with adjacent and overlying alluvial sediments.

Water Availability Basin the well(s) are located within: 31200202 SAGE HEN CR> SILVIES R- AT MOUTH; no WAB data to the south of the well.

C3a. 690-09-040 (4): Evaluation of stream impacts for each well that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% *natural* flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked ☒ box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < ¼ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

	SW #		Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
			☐			☐		☐		☐
			☐			☐		☐		☐
			☐			☐		☐		☐
			☐			☐		☐		☐

Comments: This section does not apply.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
(A) = Total Interf.													
(B) = 80 % Nat. Q													
(C) = 1 % Nat. Q													
(D) = (A) > (C)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
(E) = (A / B) x 100		%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

Basis for impact evaluation: This section applies, but use of the Hunt analytical model may not be appropriate in this case. The creek is incised into younger valley fill sediments than are likely developed by the well, so hydraulic connection is indirect

C4b. **690-09-040 (5) (b)** The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.

- C5. ☐ **If properly conditioned**, the surface water source(s) can be adequately protected from interference, and/or ground water use under this permit can be regulated if it is found to substantially interfere with surface water:
- i. ☐ The permit should contain condition #(s) _____;
 - ii. ☐ The permit should contain special condition(s) as indicated in "Remarks" below;

C6. **SW / GW Remarks and Conditions:**

References Used: Local well logs; local recent reviews; GW Report 16, by Leonard, 1970; Greene, Walker, and Corcoran, 1972, Geologic Map of the Burns Quadrangle, Oregon, USGS Miscellaneous Geologic Investigations Map I-680; Memo by Ivan Gall, 1/15, 2008, Stream Assessment for Division 9 Review in the Malheur Lakes Basin.

D. WELL CONSTRUCTION, OAR 690-200

D1. Well #: 1 Logid: HARN 51332

D2. THE WELL does not meet current well construction standards based upon:

- a. ☐ review of the well log;
b. ☐ field inspection by _____;
c. ☐ report of CWRE _____;
d. ☐ other: (specify) _____

D3. THE WELL construction deficiency:

- a. ☐ constitutes a health threat under Division 200 rules;
b. ☐ commingles water from more than one ground water reservoir;
c. ☐ permits the loss of artesian head;
d. ☐ permits the de-watering of one or more ground water reservoirs;
e. ☐ other: (specify) _____

D4. THE WELL construction deficiency is described as follows: I have no issues with the construction of this well.


D5. THE WELL a. ☐ was, or ☐ was not constructed according to the standards in effect at the time of original construction or most recent modification.b. ☐ I don't know if it met standards at the time of construction.D6. ☐ Route to the Enforcement Section. I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Enforcement Section and the Ground Water Section.**THIS SECTION TO BE COMPLETED BY ENFORCEMENT PERSONNEL**D7. ☐ Well construction deficiency has been corrected by the following actions: _____

(Enforcement Section Signature)

_____, 200_____.

D8. ☐ Route to Water Rights Section (attach well reconstruction logs to this page).

Application G-17649, Mike Peila

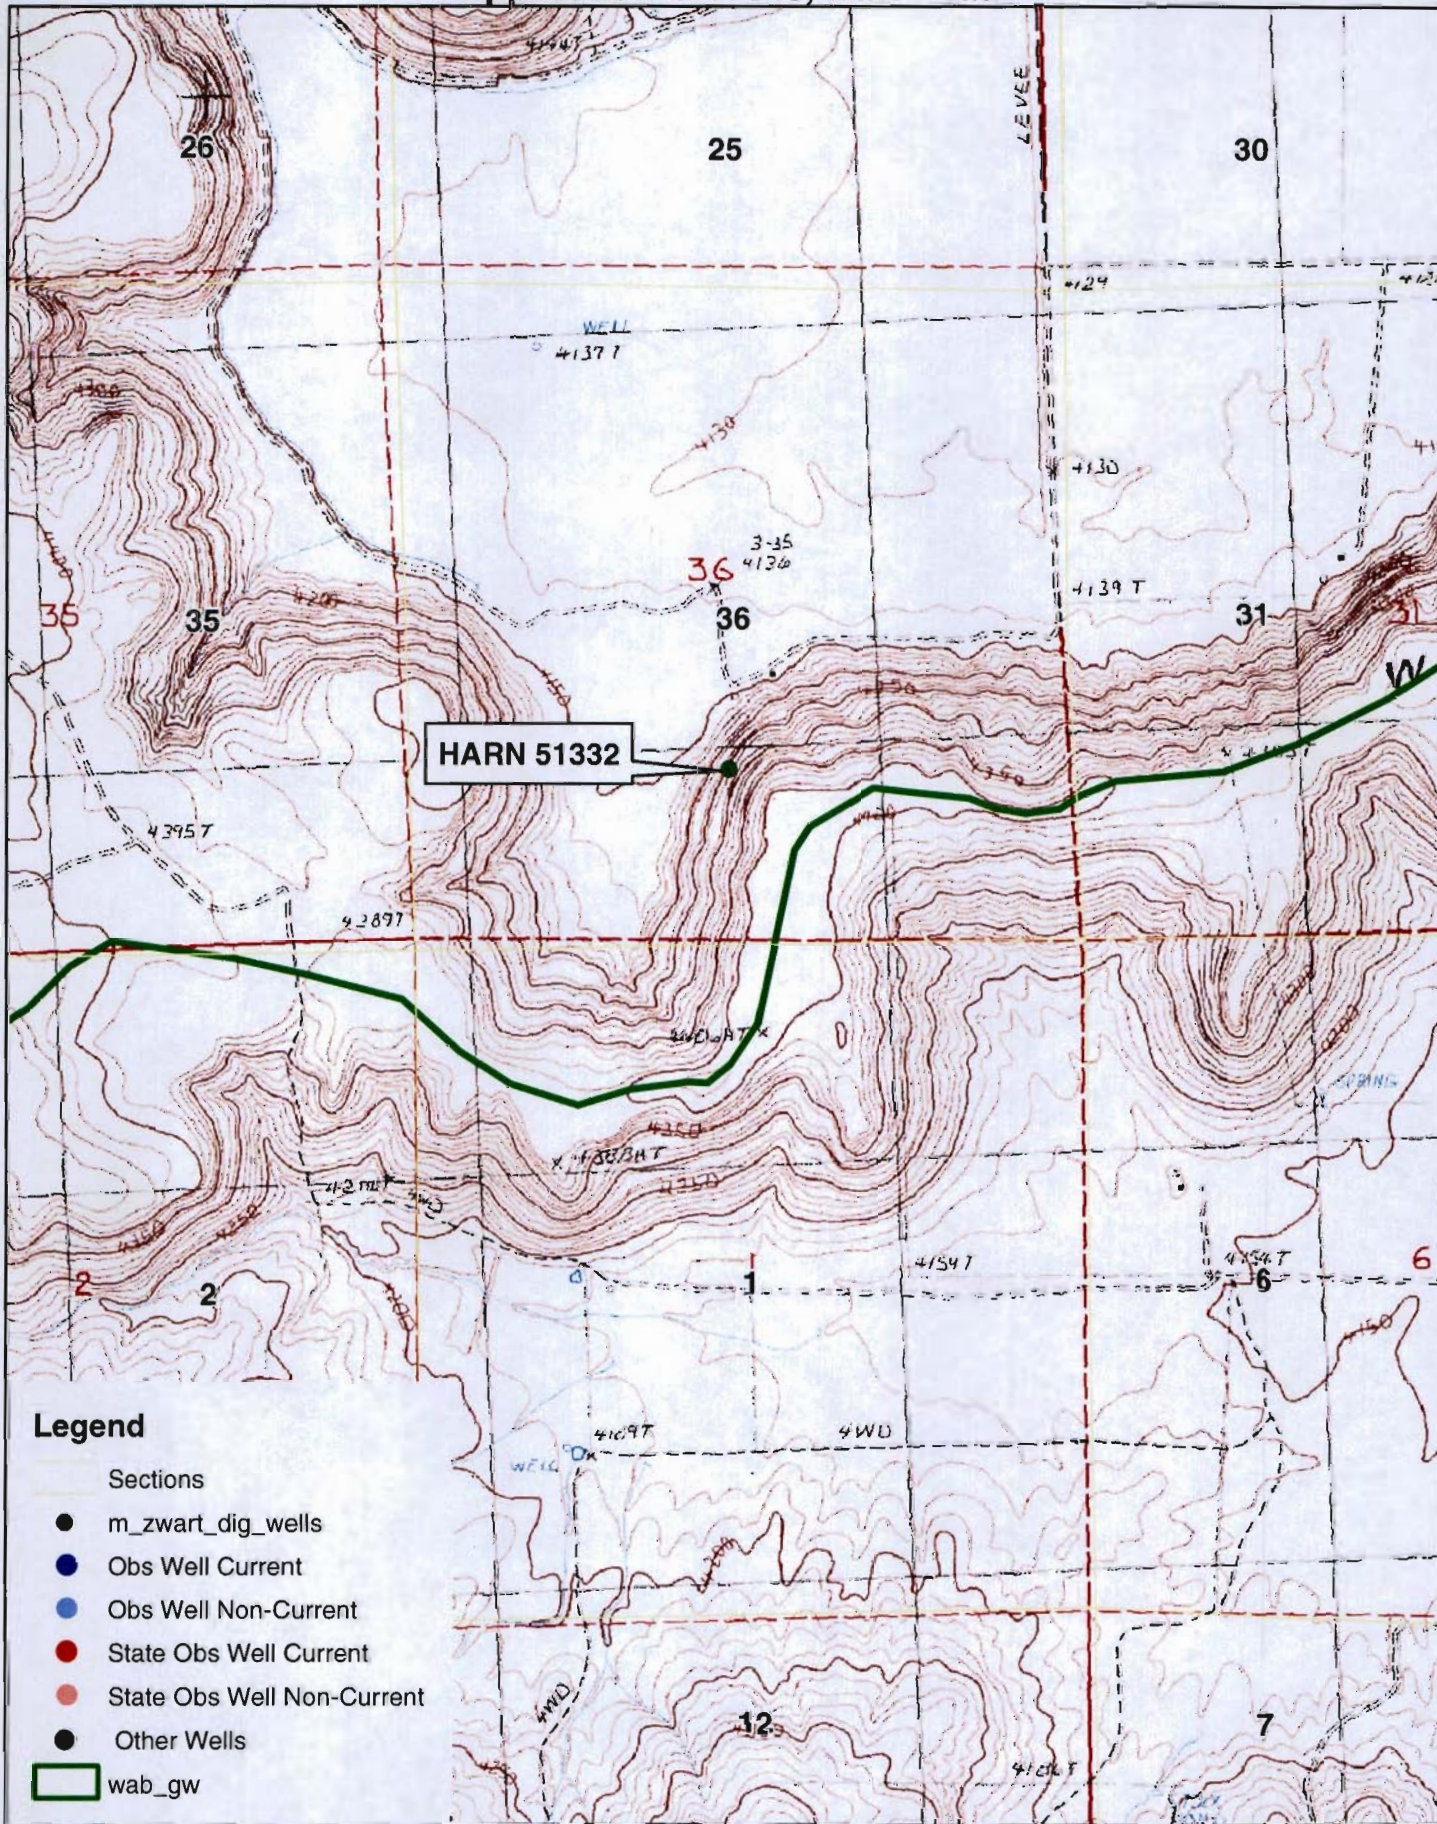

Legend

Sections

- m_zwart_dig_wells

- Obs Well Current

- Obs Well Non-Current

- State Obs Well Current

- State Obs Well Non-Current

● Other Wells

wab_gw



0

0.5

1

Miles