WATER RESOURCES DEPARTMENT

MEMO Sept 18, 2013

TO: **Application G-** 17682

FROM: **GW:** Maura Norton
(Reviewer's Name)

SUBJECT: **Scenic Waterway Interference Evaluation**

_____YES
✓ The source of appropriation is within or above a Scenic Waterway
_____NO

_____YES
Use the Scenic Waterway condition (Condition 7J)
✓ NO

_____Per ORS 390.835, the Ground Water Section is **able** to calculate ground water interference with surface water that contributes to a Scenic Waterway. The calculated interference is distributed below.

✓ Per ORS 390.835, the Ground Water Section is **unable** to calculate ground water interference with surface water that contributes to a scenic waterway; **therefore, the Department is unable to find that there is a preponderance of evidence that the proposed use will measurably reduce the surface water flows necessary to maintain the free-flowing character of a scenic waterway.**

DISTRIBUTION OF INTERFERENCE

Calculate the percentage of consumptive use by month and fill in the table below. If interference cannot be calculated, per criteria in 390.835, do not fill in the table but check the "unable" option above, thus informing Water Rights that the Department is unable to make a Preponderance of Evidence finding.

Exercise of this permit is calculated to reduce monthly flows in _____ Scenic Waterway by the following amounts expressed as a proportion of the consumptive use by which surface water flow is reduced.

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO: Water Rights Section Date **September 18, 2013**

FROM: Groundwater Section **Marc Norton**
Reviewer's Name

SUBJECT: Application G- **17682** Supersedes review of _____
Date of Review(s)

PUBLIC INTEREST PRESUMPTION; GROUNDWATER

OAR 690-310-130 (1) *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525.* Department staff review groundwater applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. **This review is based upon available information and agency policies in place at the time of evaluation.**

A. GENERAL INFORMATION:

Applicant's Name: **Gary & Darla Du Bois** County: **Umatilla**

A1. Applicant(s) seek(s) **0.11** cfs from **1** well(s) in the **Umatilla River** Basin, **Birch Creek** subbasin Quad Map: **Mc Kay Reservoir**

A2. Proposed use **Irrigation – 8.5 acres** Seasonality: **March 1 – October 31**

A3. Well and aquifer data (**attach and number logs for existing wells; mark proposed wells as such under logid**):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	**Proposed**	**1**	**CRB**	**0.11**	**01N/32E-17 SE SW**	**71'N, 419' W fr S1/4 cor S 17**
2						
3						
4						
5						

* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	**1482**				**+700**							

Use data from application for proposed wells.

A4. **Comments: The original Application, G-17436 was denied because of declines in the shallower aquifer. The applicant submitted an new application with a deeper well.**

Requested discharge rate is 50 gpm = 0.11 cfs.

A5. ☐ **Provisions of the Umatilla River** Basin rules relative to the development, classification and/or management of groundwater hydraulically connected to surface water ☐ **are**, *or* ☒ **are not**, activated by this application. (Not all basin rules contain such provisions.)
Comments: _____

A6. ☐ **Well(s) #** _____, _____, _____, _____, _____, tap(s) an aquifer limited by an administrative restriction.
Name of administrative area: Five-mile radius of the City of Pilot Rock's wells
Comments: The POD is within five-mile radius of the City of Pilot Rock's wells, but the City does not have an approved Water Management and Conservation Plan; therefore this portion of the rule does not apply.

B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

B1. **Based upon available data**, I have determined that groundwater* for the proposed use:

a. ☐ **is** over appropriated, ☐ **is not** over appropriated, *or* ☒ **cannot be determined to be** over appropriated during any period of the proposed use. * This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;

b. ☐ **will not** *or* ☐ **will** likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;

c. ☐ **will not** *or* ☐ **will** likely to be available within the capacity of the groundwater resource; or

d. ☒ **will, if properly conditioned**, avoid injury to existing groundwater rights or to the groundwater resource:
   i. ☒ The permit should contain condition #(s) **7B – Interference, 7N - Annual WL (February/March), 7P – Well Tag, 7T – Measuring Tube, Large measuring and reporting with flow meter on each well**;
   ii. ☐ The permit should be conditioned as indicated in item 2 below.
   iii. ☒ The permit should contain special condition(s) as indicated in item 3 below;

B2. a. ☐ **Condition** to allow groundwater production from no deeper than _____ ft. below land surface;

b. ☐ **Condition** to allow groundwater production from no shallower than _____ ft. below land surface;

c. ☐ **Condition** to allow groundwater production only from the _____ groundwater reservoir between approximately _____ ft. and _____ ft. below land surface;

d. ☒ **Condition** to allow production only from a single aquifer in the Columbia River Basalt groundwater reservoir;

e. ☐ **Well reconstruction** is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.

Describe injury –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): _____

B3. **Groundwater availability remarks: Well construction specified below will isolate the production from this well from nearby wells.**

Well Construction Conditions:

diii. **Groundwater production in the well shall be limited to a single aquifer in the Columbia River Basalt Group. The well shall be continuously cased and continuously sealed to a minimum of 650 feet below land surface and to within 100 feet of the bottom of the open borehole. A larger open interval may be approved by the Department if the permittee can demonstrate to the Department's satisfaction, using packer tests or other suitable methods, that the hydraulic heads of water-bearing zones in the proposed open interval are equivalent or that the open interval is part of a continuous zone of interconnected porous materials. Following well completion, the well shall be thoroughly developed to remove cuttings and drilling fluids. A video log of the well shall be collected to demonstrate to the satisfaction of the Department that the well is only open to a single aquifer.**

Each well with a pump shall be equipped with a dedicated 3/4–inch diameter (minimum) water-level measurement tube, separate from other methods of measuring the water level such as airlines or transducers. The annual water-level measurement required in the permit shall be measured through the measuring tube.

Drill cuttings shall be collected at the permitted well. Samples shall be collected at ten-foot intervals and at changes in lithology. The samples will be stored in plastic bags with depth and well identifier on each bag.

All hydrologic, geologic, geochemical and video data collected shall be provided to OWRD in report and in electronic format specified by the Department.

The Department requires the water user to obtain, from a qualified individual (see below), and report annual static water levels for each well on the permit. The static water level shall be measured in the month of February. Reports shall be submitted to the Department within 30 days of measurement.

The permittee shall report an initial February static water-level measurement once well construction is complete and annual measurements thereafter. Annual measurements are required whether or not the well is used. The first annual measurement will establish a reference level against which future measurements will be compared. However, the Director may establish the reference level based on an analysis of other water-level data. The Director may require the user to obtain and report additional water levels each year if more data are needed to evaluate the aquifer system.

All measurements shall be made by a certified water rights examiner, registered professional geologist, registered professional engineer, licensed well constructor, or pump installer licensed by the Construction Contractors Board. Measurements shall be submitted on forms provided by, or specified by, the Department. Measurements shall be made with equipment that is accurate to at least the standards specified in OAR 690-217-0045. The Department requires the individual performing the measurement to:

A. Associate each measurement with an owner's well name or number and a Department well log ID; and
B. Report water levels to at least the nearest tenth of a foot as depth-to-water below ground surface; and
C. Specify the method of measurement; and
D. Certify the accuracy of all measurements and calculations reported to the Department.

The water user shall discontinue use of, or reduce the rate or volume of withdrawal from, the well(s) if any of the following events occur:

A. Annual water-level measurements reveal an average water-level decline of three or more feet per year for five consecutive years; or
B. Annual water-level measurements reveal a water-level decline of 15 or more feet in fewer than five consecutive years; or
C. Annual water-level measurements reveal a water-level decline of 25 or more feet; or
D. Hydraulic interference leads to a decline of 25 or more feet in any neighboring well with senior priority.

The period of restricted use shall continue until the water level rises above the decline level which triggered the action or the Department determines, based on the permittee's and/or the Department's data and analysis, that no action is necessary because the aquifer in question can sustain the observed declines without adversely impacting the resource or causing substantial interference with senior water rights. The water user shall not allow excessive decline, as defined in Commission rules, to occur within the aquifer as a result of use under this permit. If more than one well is involved, the water user may submit an alternative measurement and reporting plan for review and approval by the Department.

Prior to using water from any well listed on this permit, the permittee shall ensure that the well has been assigned an OWRD Well Identification Number (Well ID tag), which shall be permanently attached to the well. The Well ID shall be used as a reference in any correspondence regarding the well, including any reports of water use, water level, or pump test data.

C. GROUND WATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040

C1. **690-09-040 (1):** Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	**Columbia River Basalt**	☒	☐
		☐	☐
		☐	☐
		☐	☐
		☐	☐

Basis for aquifer confinement evaluation: groundwater level should rise above where it will encountered during construction.

C2. **690-09-040 (2) (3):** Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected? YES	NO	ASSUMED	Potential for Subst. Interfer. Assumed? YES	NO
1	**1**	**Intermittent streams**	**1453**	**1480**	**200**	☐	☒	☐	☐	☒
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐

Basis for aquifer hydraulic connection evaluation: Groundwater is below nearby stream which is intermittent in nature – no hydraulic connection.

Water Availability Basin the well(s) are located within:

C3a. **690-09-040 (4):** Evaluation of stream impacts for each well that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% *natural* flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked ☒ box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < ¼ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells**. Otherwise same evaluation and limitations apply as in C3a above.

	SW #		Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
			☐			☐		☐		☐
			☐			☐		☐		☐
			☐			☐		☐		☐
			☐			☐		☐		☐

Comments: NA

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Distributed Wells Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													

Distributed Wells Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
(A) = Total Interf.													
(B) = 80 % Nat. Q													
(C) = 1 % Nat. Q													
(D) = (A) > (C)										✓	✓	✓	✓
(E) = (A / B) x 100		%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

Basis for impact evaluation:

C4b. **690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.**

C5. ☐ **If properly conditioned**, the surface water source(s) can be adequately protected from interference, and/or groundwater use under this permit can be regulated if it is found to substantially interfere with surface water:

i. ☐ The permit should contain condition #(s)_____;

ii. ☐ The permit should contain special condition(s) as indicated in "Remarks" below;

C6. **SW / GW Remarks and Conditions**

References Used:

D. WELL CONSTRUCTION, OAR 690-200

D1. **Well #:** _____ **Logid:** _____

D2. **THE WELL does not meet current well construction standards based upon:**
- a. ☐ review of the well log;
- b. ☐ field inspection by _____;
- c. ☐ report of CWRE _____;
- d. ☐ other: (specify) _____

D3. **THE WELL construction deficiency**:
- a. ☐ constitutes a health threat under Division 200 rules;
- b. ☐ commingles water from more than one groundwater reservoir;
- c. ☐ permits the loss of artesian head;
- d. ☐ permits the de-watering of one or more groundwater reservoirs;
- e. ☐ other: (specify) _____

D4. **THE WELL construction deficiency is described as follows:** _____

D5. **THE WELL**
- a. ☐ **was**, *or* ☐ **was not** constructed according to the standards in effect at the time of original construction or most recent modification.
- b. ☐ I don't know if it met standards at the time of construction.

D6. ☐ **Route to the Enforcement Section.** I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Enforcement Section and the Groundwater Section.

THIS SECTION TO BE COMPLETED BY ENFORCEMENT PERSONNEL

D7. ☐ Well construction deficiency has been corrected by the following actions: _____

_____

_____

_____

_____

_____

_____

_____

_____

_____ _____, 200____.

(Enforcement Section Signature)

D8. ☐ **Route to Water Rights Section (attach well reconstruction logs to this page).**
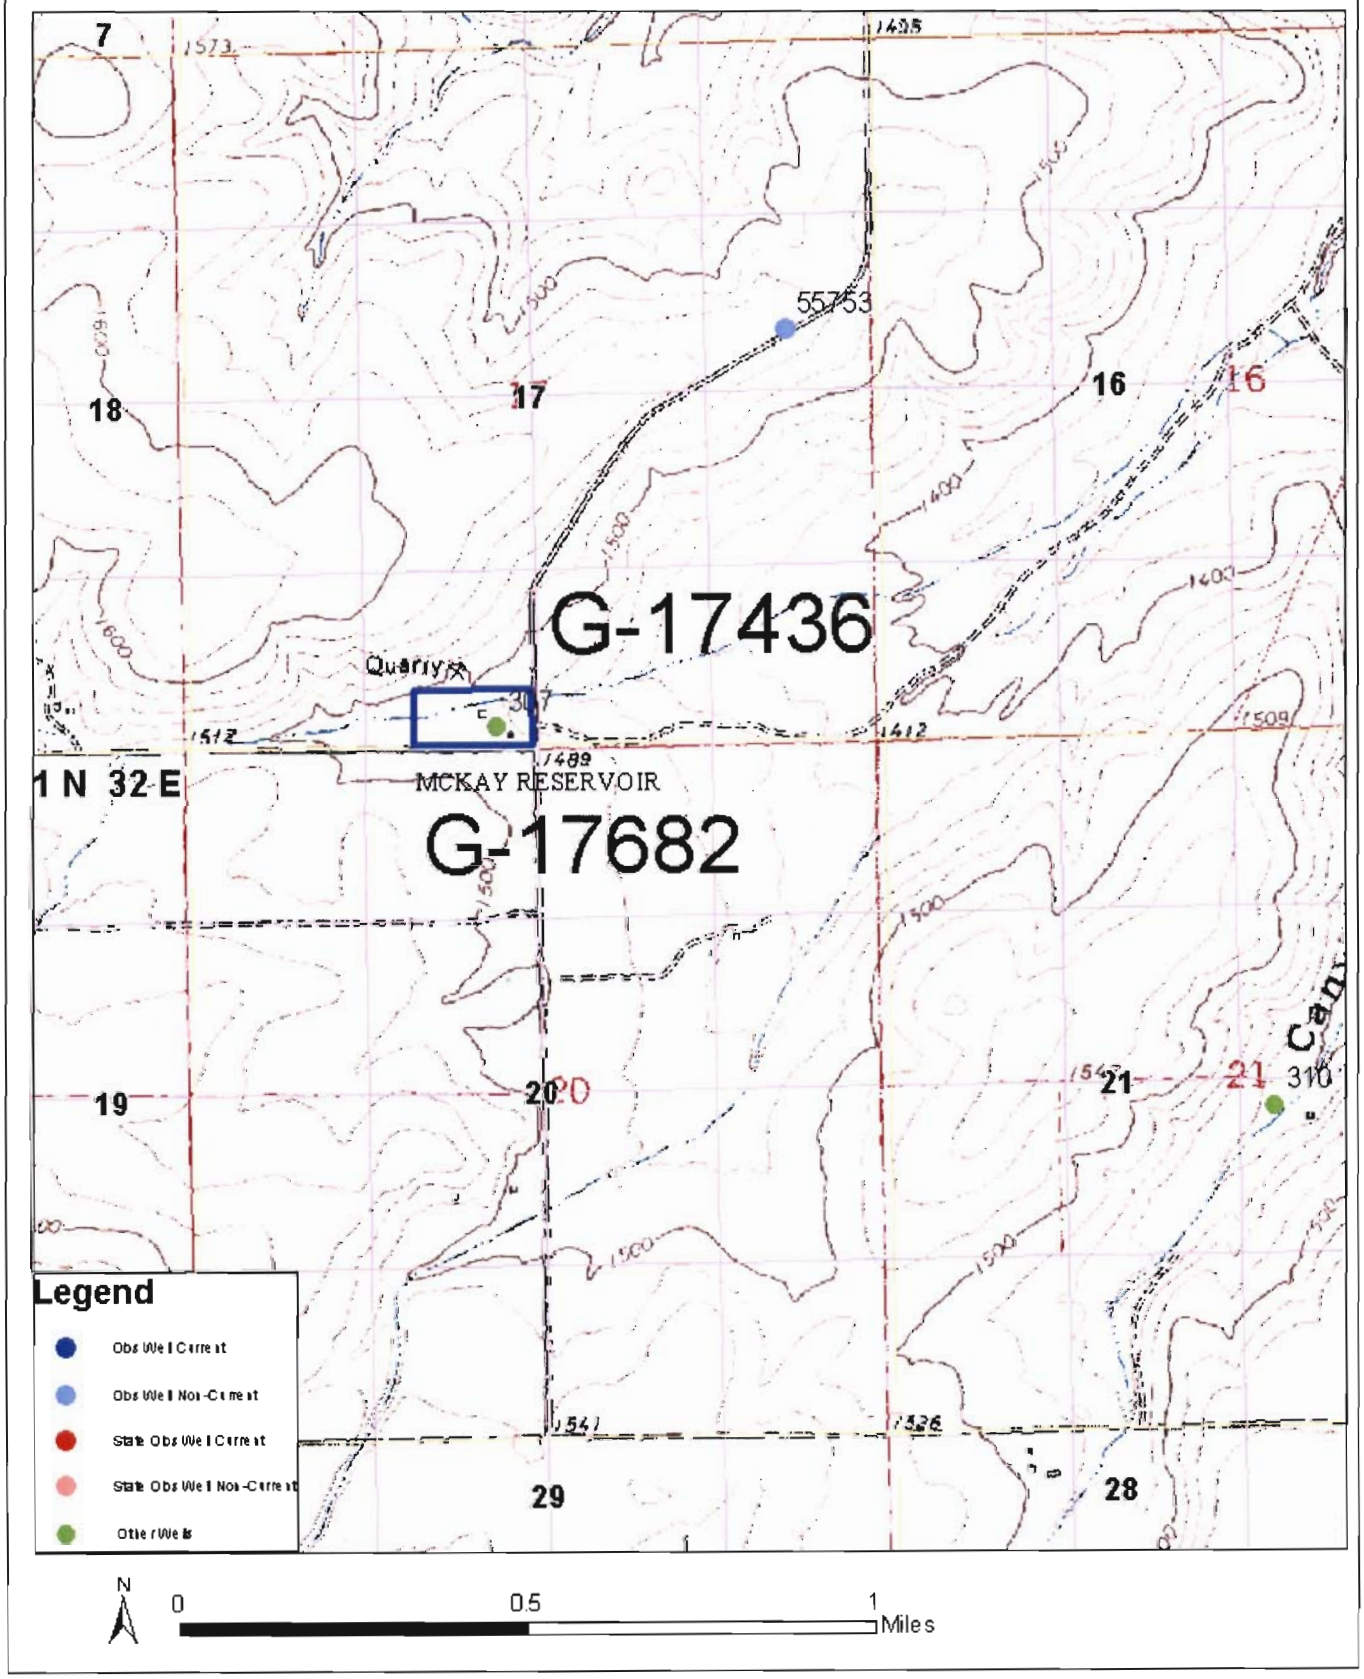
Groundwater Application G-17682, Du Bois
Umatilla County, McKay Reservoir Quad