

Water Right Conditions Tracking Slip

Groundwater/Hydrology Section

FILE # # G-17777

ROUTED TO: Water Rights - Mary

TOWNSHIP/
RANGE-SECTION: 235/33E-7

CONDITIONS ATTACHED?: [☒] yes [☐] no

REMARKS OR FURTHER INSTRUCTIONS:

Reviewer: Mike Zwart

[illegible]

PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS

TO: Water Rights Section Date March 12, 2014

FROM: Groundwater Section Mike Zwart
Reviewer's Name

SUBJECT: Application G- 17777 Supersedes review of _____
Date of Review(s)

PUBLIC INTEREST PRESUMPTION: GROUNDWATER

OAR 690-310-130 (1) *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525. Department staff review ground water applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. This review is based upon available information and agency policies in place at the time of evaluation.*

A. GENERAL INFORMATION: Applicant's Name: Mike and Virginia Taylor County: Harney

A1. Applicant(s) seek(s) 2.0* cfs from two well(s) in the Malheur Lake Basin,
_____ subbasin Quad Map: Carson Point

A2. Proposed use Irrigation, 160 acres Seasonality: March 1 to October 31

A3. Well and aquifer data (attach and number logs for existing wells; mark proposed wells as such under logid):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	Proposed	4	Basin Fill Seds.	2.0	23S/33E-7 SE-NE	20' N, 20' W fr E ¼ cor S 7
2	Proposed	5	Basin Fill Seds.	2.0	23S/33E-7 SW-NE	1320' N, 20' E fr center S 7
3						
4						
5						

* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	4129											
2	4128											

Use data from application for proposed wells.

A4. **Comments:** The application included well log ID HARN 51931 and stated that the proposed wells would be constructed similar to this well. *The following findings are based on a proposed rate of 2.0 cfs, which is what is covered by the fees paid and which is the customary rate for the requested acreage. However, page five of the application requests 4.9 cfs. I believe this is an error, since the applicants previously applied for groundwater (G-17722) at that rate.

A5. ☒ **Provisions of the Malheur Lake** Basin rules relative to the development, classification and/or management of ground water hydraulically connected to surface water ☐ are, or ☒ are not, activated by this application. (Not all basin rules contain such provisions.)
Comments: _____

A6. ☐ **Well(s) #** _____, _____, _____, _____, _____, tap(s) an aquifer limited by an administrative restriction.
Name of administrative area: _____
Comments: _____

B. GROUND WATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070

B1. Based upon available data, I have determined that ground water* for the proposed use:

- a. ☐ is over appropriated, ☐ is not over appropriated, or ☒ cannot be determined to be over appropriated during any period of the proposed use. * This finding is limited to the ground water portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b. ☐ will not or ☐ will likely be available in the amounts requested without injury to prior water rights. * This finding is limited to the ground water portion of the injury determination as prescribed in OAR 690-310-130;
- c. ☐ will not or ☐ will likely to be available within the capacity of the ground water resource; or
- d. ☒ will, if properly conditioned, avoid injury to existing ground water rights or to the ground water resource:
 - i. ☒ The permit should contain condition #(s) 7N;
 - ii. ☐ The permit should be conditioned as indicated in item 2 below.
 - iii. ☒ The permit should contain special condition(s) as indicated in item 3 below;

- B2.
- a. ☐ Condition to allow ground water production from no deeper than _____ ft. below land surface;
 - b. ☐ Condition to allow ground water production from no shallower than _____ ft. below land surface;
 - c. ☐ Condition to allow ground water production only from the _____ ground water reservoir between approximately _____ ft. and _____ ft. below land surface;
 - d. ☐ Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Ground Water Section.

Describe injury –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): _____

B3. Ground water availability remarks: Condition 7N is typically used in this part of the Malheur Lake Basin.

This application is about eleven miles northwest of a part of the Malheur Lake Basin, just northwest of Crane, which has been the subject of concern about the groundwater resource by local water users for several years. As a result, the Department selected several wells in that area for quarterly water-level monitoring. In addition, one of those wells was instrumented with continuous water-level recording equipment. Most of those wells are clearly displaying year-to-year water-level declines. The positive findings here are based on the significant distance from that area of the basin and on the lack of local water-level data with an adequate period of record to conclude whether or not water levels are stable. This application is also in the general vicinity of at least three other recently filed applications which have not yet been issued permits and several more that have been recently permitted but have not yet been developed. Therefore, given the documented water-level declines elsewhere in the basin and the proximity to other recent proposals to develop groundwater, it is possible that the proposed use will result in water level declines that may exceed one or more of the triggers in the measurement condition that is being recommended.

Special Permit Condition: The permittee shall construct one minimum six-inch diameter observation well to penetrate the same aquifer as the production wells. The well shall meet the Department's minimum well construction standards and shall be cased and sealed to the same depth as the production wells. The well shall be constructed at a location approved by the Department for the purpose of instrumentation with continuous water-level monitoring equipment. The landowner or permittee shall provide access to Department staff to install and maintain the monitoring equipment. The well shall not be used for any other purpose while the Department is monitoring water levels. The well shall be completed prior to water use under the terms of any permit issued. This condition shall not apply if an observation well is constructed under the terms of any permit issued for application G-17722.

C. GROUND WATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040**C1. 690-09-040 (1): Evaluation of aquifer confinement:**

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1,2	Basin-fill sediments (Qal and Tvs of GW Report #16)	☐	☒
		☐	☐
		☐	☐
		☐	☐
		☐	☐

Basis for aquifer confinement evaluation: Groundwater in the basin fill is generally unconfined to poorly confined and hydraulically connected to surface water, including Malheur and Harney Lakes.

C2. 690-09-040 (2) (3): Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐
						☐	☐	☐	☐	☐

Basis for aquifer hydraulic connection evaluation: Groundwater likely is discharging to lower reaches of Malheur Slough, Ninemile Slough and/or Malheur Lake. Malheur Slough and Ninemile Slough are dry in most years and therefore not considered for Division 9 reviews, per memo by Ivan Gall, January 15, 2008.

Water Availability Basin the well(s) are located within: Malheur SI > Malheur L ab Ninemile SI (31200107).

C3a. 690-09-040 (4): Evaluation of stream impacts for each well that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% natural flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked ☒ box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < ¼ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐
		☐	☐			☐		☐		☐

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

	SW #		Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
			☐			☐		☐		☐
			☐			☐		☐		☐
			☐			☐		☐		☐
			☐			☐		☐		☐

Comments: This section does not apply.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

Non-Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
Distributed Wells													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
(A) = Total Interf.													
(B) = 80 % Nat. Q													
(C) = 1 % Nat. Q													
(D) = (A) > (C)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
(E) = (A / B) x 100		%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

Basis for impact evaluation:

C4b. **690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.**

C5. ☐ **If properly conditioned**, the surface water source(s) can be adequately protected from interference, and/or ground water use under this permit can be regulated if it is found to substantially interfere with surface water:

i. ☐ The permit should contain condition #(s) _____;

ii. ☐ The permit should contain special condition(s) as indicated in "Remarks" below:

C6. SW / GW Remarks and Conditions

References Used: Local well logs; local recent reviews; GW Report 16, by Leonard, 1970; Greene, Walker, and Corcoran, 1972, Geologic Map of the Burns Quadrangle, Oregon, USGS Miscellaneous Geologic Investigations Map I-680; Memo by Ivan Gall, 1/15, 2008, Stream Assessment for Division 9 Review in the Malheur Lakes Basin.

D. WELL CONSTRUCTION, OAR 690-200

D1. Well #: _____ Logid: _____

D2. **THE WELL does not appear to meet current well construction standards based upon:**


- a. ☐ review of the well log;
- b. ☐ field inspection by _____;
- c. ☐ report of CWRE _____;
- d. ☐ other: (specify) _____

D3. **THE WELL construction deficiency or other comment is described as follows:** __________

_____D4. ☐ **Route to the Well Construction and Compliance Section for a review of existing well construction.**

Water Availability Tables

Application G-17777, Mike and Virginia Taylor

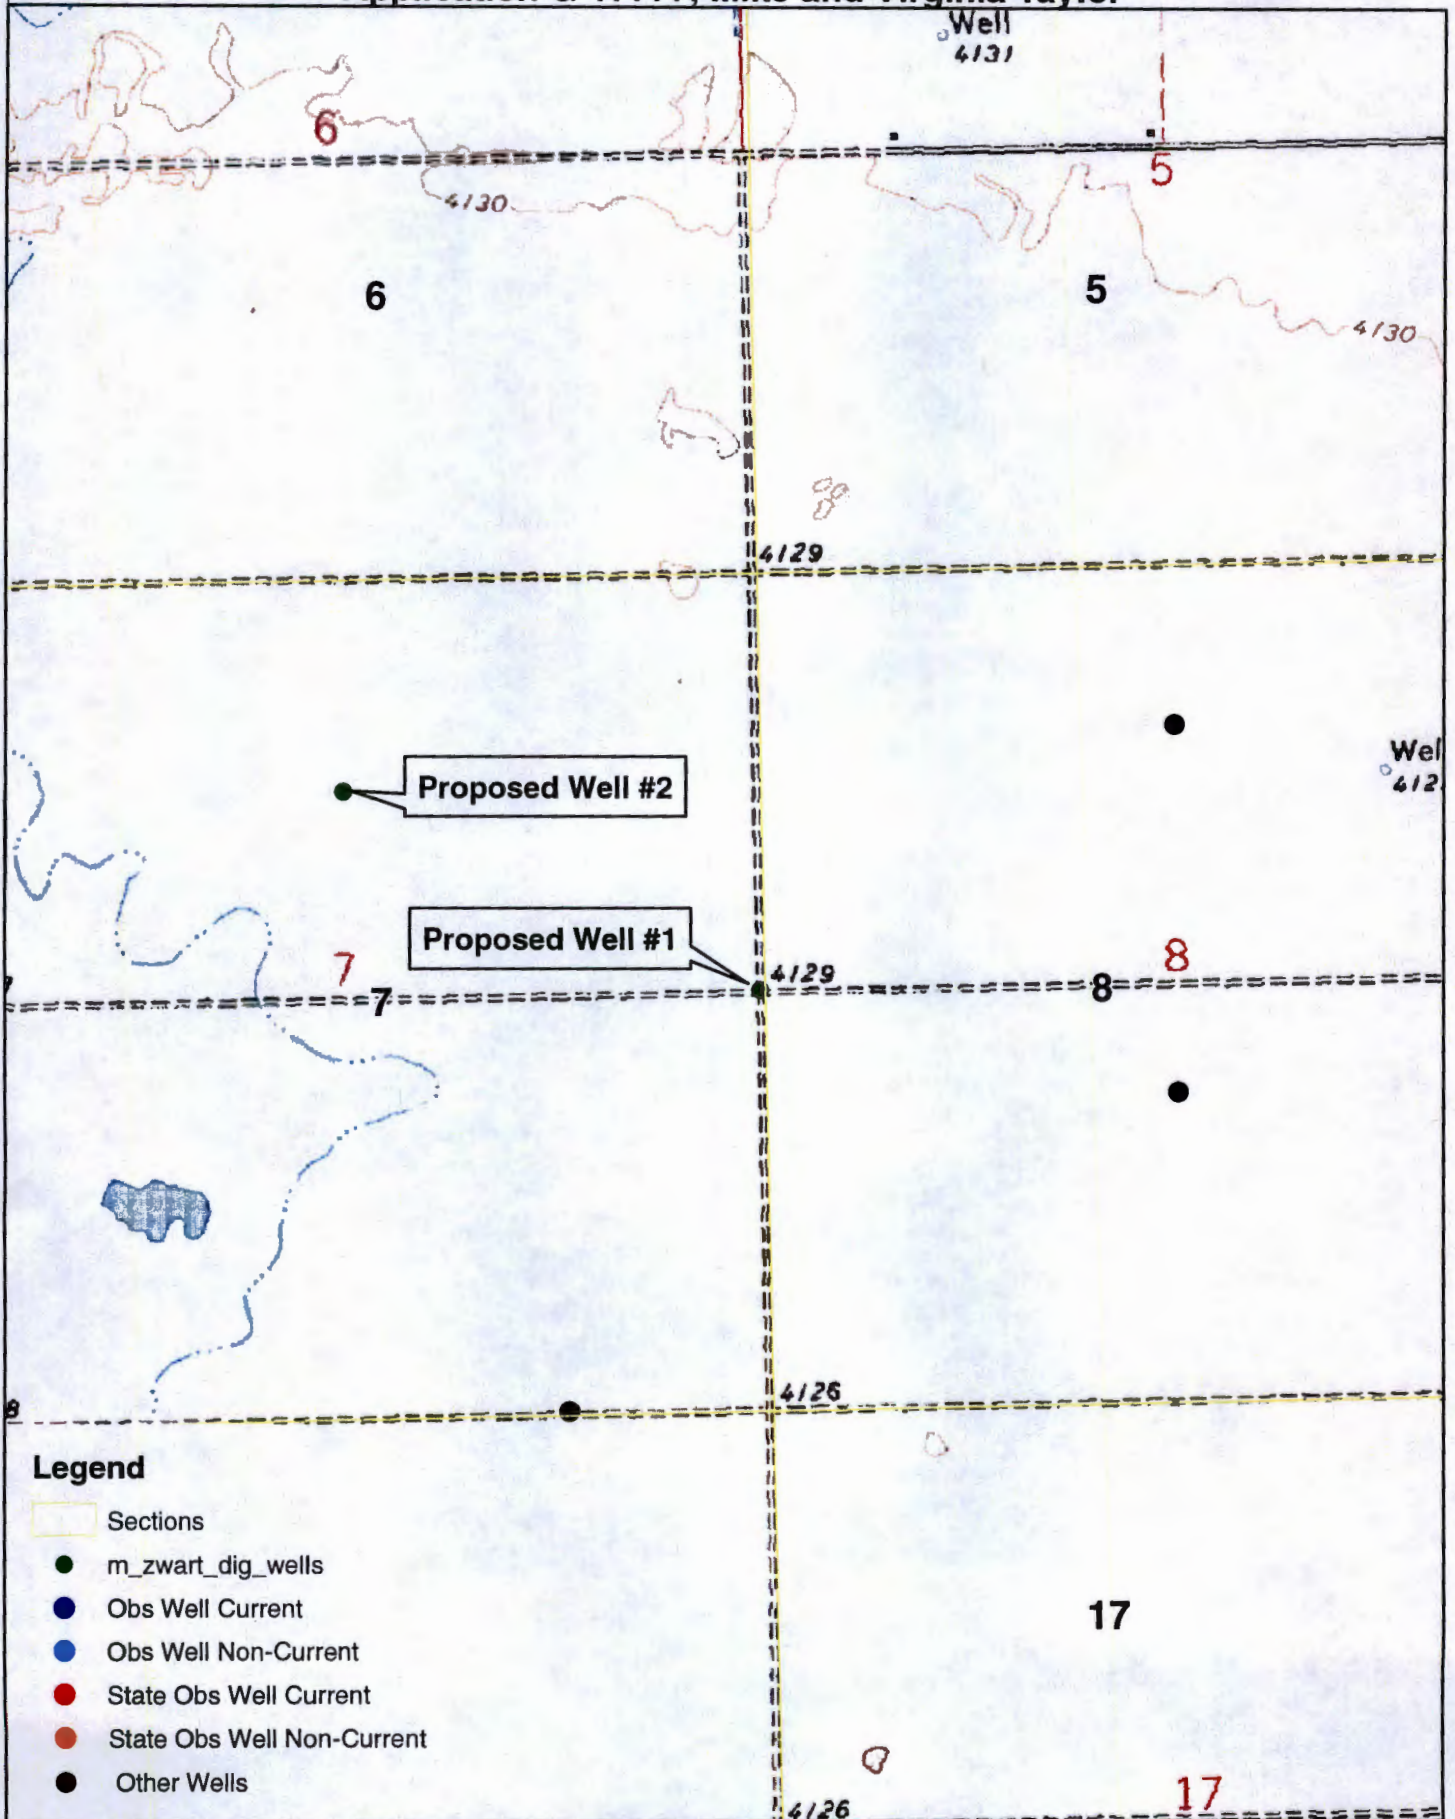

Legend

- Sections
- m_zwart_dig_wells
- Obs Well Current
- Obs Well Non-Current
- State Obs Well Current
- State Obs Well Non-Current
- Other Wells



0

0.5

1

Miles