

WATER RESOURCES DEPARTMENT MEMO

July 31, 2015

TO: Application G- 18105
FROM: Phillip Marcy - Groundwater Section
SUBJECT: Scenic Waterway Interference Evaluation

YES
[X] NO
The source of appropriation is within or above a Scenic Waterway

YES
[X] NO
Use the Scenic Waterway condition (condition 7J)

Per ORS 390.835, the Groundwater Section is able to calculate groundwater interference with surface water that contributes to a Scenic Waterway. The calculated interference distribution is provided below.

Per ORS 390.835, the Groundwater Section is unable to calculate groundwater interference with surface water that contributes to a scenic waterway; therefore, the Department is unable to find that there is a preponderance of evidence that the proposed use will measurably reduce the surface flows necessary to maintain the free-flowing character of a scenic waterway.

DISTRIBUTION OF INTERFERENCE

Calculate interference as the monthly fraction of the annual consumptive use and fill in the table below. If interference cannot be calculated, per criteria in 390.839, do not fill in the table but check the "unable" option above, thus informing the Water Rights Section that the Department is unable to make a Preponderance of Evidence finding.

Exercise of this permit is calculated to reduce monthly flows in the Scenic Waterway by the following amounts, expressed as a proportion of the annual consumptive use pumped from the well.

Monthly Fraction of Annual Consumptive Use

Table with 12 columns: Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, Oct, Nov, Dec

**PUBLIC INTEREST REVIEW FOR GROUNDWATER APPLICATIONS**

TO: Water Rights Section Date 07/31/2015  
 FROM: Groundwater Section Phillip I. Marcy / Karl C. Wozniak  
 SUBJECT: Application G- 18105 Reviewer's Name  
 Supersedes review of \_\_\_\_\_ Date of Review(s) \_\_\_\_\_

**PUBLIC INTEREST PRESUMPTION; GROUNDWATER**

**OAR 690-310-130 (1)** *The Department shall presume that a proposed groundwater use will ensure the preservation of the public welfare, safety and health as described in ORS 537.525.* Department staff review groundwater applications under OAR 690-310-140 to determine whether the presumption is established. OAR 690-310-140 allows the proposed use be modified or conditioned to meet the presumption criteria. **This review is based upon available information and agency policies in place at the time of evaluation.**

**A. GENERAL INFORMATION:** Applicant's Name: Crosby Land Company, LLC County: Marion

A1. Applicant(s) seek(s) 0.3564 cfs from 1 well(s) in the Willamette Basin,  
Ryan Creek subbasin Quad Map: Woodburn

A2. Proposed use Primary Irrigation (50.1 acres) Seasonality: March 1<sup>st</sup> to October 31<sup>st</sup> (245 days)

A3. Well and aquifer data (**attach and number logs for existing wells; mark proposed wells as such under logid**):

Well	Logid	Applicant's Well #	Proposed Aquifer*	Proposed Rate(cfs)	Location (T/R-S QQ-Q)	Location, metes and bounds, e.g. 2250' N, 1200' E fr NW cor S 36
1	Proposed	1	Alluvium	0.3564	4S/1W-8 NW-NW	1535 FT S & 695 FT E FR SW COR, ALEXIS AUBICHON DLC 39
2						
3						
4						
5						

\* Alluvium, CRB, Bedrock

Well	Well Elev ft msl	First Water ft bls	SWL ft bls	SWL Date	Well Depth (ft)	Seal Interval (ft)	Casing Intervals (ft)	Liner Intervals (ft)	Perforations Or Screens (ft)	Well Yield (gpm)	Draw Down (ft)	Test Type
1	181	?	?	?	250±	?	250±	?	100-250±	?	?	?

Use data from application for proposed wells.

A4. **Comments:** Wells completed to similar depths in the area encounter layered sequences of clays, sands, and gravels. Reported yield within these wells should be adequate for the proposed use (see attached logs).

A5.  **Provisions of the Willamette** \_\_\_\_\_ Basin rules relative to the development, classification and/or management of groundwater hydraulically connected to surface water  **are**, or  **are not**, activated by this application. (Not all basin rules contain such provisions.)  
 Comments: The well will produce from a confined aquifer so the pertinent basin rules (OAR 690-502-0240) do not apply.

A6.  **Well(s) #** \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_, tap(s) an aquifer limited by an administrative restriction.  
 Name of administrative area: \_\_\_\_\_  
 Comments: \_\_\_\_\_

**B. GROUNDWATER AVAILABILITY CONSIDERATIONS, OAR 690-310-130, 400-010, 410-0070**

B1. **Based upon available data**, I have determined that groundwater\* for the proposed use:

- a.  is over appropriated,  is not over appropriated, or  cannot be determined to be over appropriated during any period of the proposed use. \* This finding is limited to the groundwater portion of the over-appropriation determination as prescribed in OAR 690-310-130;
- b.  will not or  will likely be available in the amounts requested without injury to prior water rights. \* This finding is limited to the groundwater portion of the injury determination as prescribed in OAR 690-310-130;
- c.  will not or  will likely to be available within the capacity of the groundwater resource; or
- d.  will, if properly conditioned, avoid injury to existing groundwater rights or to the groundwater resource:
  - i.  The permit should contain condition #(s) 7B, 7C, large water-use reporting;
  - ii.  The permit should be conditioned as indicated in item 2 below.
  - iii.  The permit should contain special condition(s) as indicated in item 3 below;

- B2. a.  Condition to allow groundwater production from no deeper than \_\_\_\_\_ ft. below land surface;
- b.  Condition to allow groundwater production from no shallower than \_\_\_\_\_ ft. below land surface;
- c.  Condition to allow groundwater production only from the Alluvial groundwater reservoir between approximately \_\_\_\_\_ ft. and \_\_\_\_\_ ft. below land surface;
- d.  Well reconstruction is necessary to accomplish one or more of the above conditions. The problems that are likely to occur with this use and without reconstructing are cited below. Without reconstruction, I recommend withholding issuance of the permit until evidence of well reconstruction is filed with the Department and approved by the Groundwater Section.

**Describe injury** –as related to water availability– that is likely to occur without well reconstruction (interference w/ senior water rights, not within the capacity of the resource, etc): \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

B3. **Groundwater availability remarks:** The proposed well site is underlain by about 100 feet of Willamette Silt which is underlain by about 100 feet mixed-grained sediments. Columbia River Basalt occurs at a depth of about 200 feet. A wedge of sand and gravel beneath the Willamette Silt thickens to the east but thins dramatically to the west. This is probably an old Willamette River channel which is inset into relatively fine-grained sediments. Within the old channel deposits sands and gravels predominate and well yields and specific capacities are high; outside of the channel, silts and clays predominate and well yields and specific capacities are much lower. Long-term water-level trends in a nearby observation well (MARI 308) are relatively stable with a subdued correlation to decadal climate trends. Seasonal water-level fluctuations however, have increased to about 65 feet compared to about 40 feet prior to 1985. The increased seasonal fluctuations correlate to increased appropriation from the local aquifer system. The aquifer can probably sustain some additional development but any substantial increase in seasonal fluctuations (>20 feet) is likely to have adverse impacts on nearby wells. Because of the complex aquifer geometry, it is difficult to predict what level of additional stress will produce this response. Our general opinion is that the current application is not likely to have that large of an impact. However, decline and hydraulic interference conditions are warranted by the underlying uncertainties. A water-use reporting condition is necessary to gage the impact on our nearby observation well which, in turn, will allow us to more effectively evaluate impacts to nearby wells and to more effectively evaluate the capacity of the local aquifer system.

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**C. GROUNDWATER/SURFACE WATER CONSIDERATIONS, OAR 690-09-040**

C1. **690-09-040 (1):** Evaluation of aquifer confinement:

Well	Aquifer or Proposed Aquifer	Confined	Unconfined
1	Alluvium	<input checked="" type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>

**Basis for aquifer confinement evaluation:** General knowledge indicates that the water table occurs at shallow depths in the Willamette Silt which confines the underlying sand and gravel aquifer.

C2. **690-09-040 (2) (3):** Evaluation of distance to, and hydraulic connection with, surface water sources. All wells located a horizontal distance less than ¼ mile from a surface water source that produce water from an unconfined aquifer shall be assumed to be hydraulically connected to the surface water source. Include in this table any streams located beyond one mile that are evaluated for PSI.

Well	SW #	Surface Water Name	GW Elev ft msl	SW Elev ft msl	Distance (ft)	Hydraulically Connected?			Potential for Subst. Interfer. Assumed?	
						YES	NO	ASSUMED	YES	NO
1	1	Ryan Creek	150	105	2400	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
1	2	Unnamed trib to Ryan Creek	150	133	1450	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
1	3	Willamette River	150	60	5000	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**Basis for aquifer hydraulic connection evaluation:** Published water table maps indicate that groundwater flows toward and discharges into local streams.

**Water Availability Basin the well(s) are located within:** Willamette R > Columbia R – AB Molalla R

C3a. **690-09-040 (4):** Evaluation of stream impacts for each well that has been determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. Limit evaluation to instream rights and minimum stream flows that are pertinent to that surface water source, and not lower SW sources to which the stream under evaluation is tributary. Compare the requested rate against the 1% of 80% natural flow for the pertinent Water Availability Basin (WAB). If Q is not distributed by well, use full rate for each well. Any checked  box indicates the well is assumed to have the potential to cause PSI.

Well	SW #	Well < ¼ mile?	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
1	1	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	3830	<input type="checkbox"/>	<25%	<input type="checkbox"/>
1	2	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	3830	<input type="checkbox"/>	<25%	<input type="checkbox"/>
1	3	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	3830	<input type="checkbox"/>	<25%	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

C3b. **690-09-040 (4):** Evaluation of stream impacts by total appropriation for all wells determined or assumed to be **hydraulically connected and less than 1 mile** from a surface water source. **Complete only if Q is distributed among wells.** Otherwise same evaluation and limitations apply as in C3a above.

	SW #	Qw > 5 cfs?	Instream Water Right ID	Instream Water Right Q (cfs)	Qw > 1% ISWR?	80% Natural Flow (cfs)	Qw > 1% of 80% Natural Flow?	Interference @ 30 days (%)	Potential for Subst. Interfer. Assumed?
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

**Comments:** Interference at 30 days was not modeled but modeling in similar circumstances shows that the presence of a thick layer of Willamette Silt between the streams and the productive sand and gravel beds is likely to keep interference well below 25%.

C4a. **690-09-040 (5):** Estimated impacts on **hydraulically connected surface water sources greater than one mile** as a percentage of the proposed pumping rate. Limit evaluation to the effects that will occur up to one year after pumping begins. This table encompasses the considerations required by 09-040 (5)(a), (b), (c) and (d), which are not included on this form. Use additional sheets if calculated flows from more than one WAB are required.

<b>Non-Distributed Wells</b>													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
<b>Distributed Wells</b>													
Well	SW#	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
		%	%	%	%	%	%	%	%	%	%	%	%
Well Q as CFS													
Interference CFS													
(A) = Total Interf.													
(B) = 80 % Nat. Q													
(C) = 1 % Nat. Q													
(D) = (A) > (C)													
(E) = (A / B) x 100		%	%	%	%	%	%	%	%	%	%	%	%

(A) = total interference as CFS; (B) = WAB calculated natural flow at 80% exceed. as CFS; (C) = 1% of calculated natural flow at 80% exceed. as CFS; (D) = highlight the checkmark for each month where (A) is greater than (C); (E) = total interference divided by 80% flow as percentage.

**Basis for impact evaluation:** Interference with the Willamette River was not modeled as the total rate of production from the well will be less than 1% of the 80% natural flow for all months of the year.

---

---

---

---

---

---

---

---

---

---

C4b. **690-09-040 (5) (b) The potential to impair or detrimentally affect the public interest is to be determined by the Water Rights Section.**

- C5.  **If properly conditioned**, the surface water source(s) can be adequately protected from interference, and/or groundwater use under this permit can be regulated if it is found to substantially interfere with surface water:
  - i.  The permit should contain condition #(s) \_\_\_\_\_;
  - ii.  The permit should contain special condition(s) as indicated in "Remarks" below;

C6. **SW / GW Remarks and Conditions** \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**References Used:**

Conlon, T.D., Wozniak, K.C., Woodcock, D., Herrera, N.B., Fisher, B.J., Morgan, D.S., Lee, K.K., and Hinkle, S.R., 2005, Ground-water hydrology of the Willamette Basin, Oregon: U.S. Geological Survey Scientific Investigations Report 2005-5168.

Gannett, M.W. and Caldwell, R., 1998, Geologic framework of the Willamette Lowland aquifer system, Oregon and Washington: U.S. Geological Survey Professional Paper 1424-A, 32 p.

Piper, A.M., 1942, Ground-water resources of the Willamette Valley, Oregon: U.S. Geological Survey Water-Supply Paper 890.

Price, D., 1961, Records of wells, water levels and chemical quality of ground water in the French Prairie-Mission Bottom area northern Willamette Valley, Oregon: Oregon Water Resources Department Ground Water Report Number 1.

Woodward, D.G., Gannett, M.W., and Vaccaro, J.J., 1998, Hydrogeologic framework of the Willamette Lowland aquifer system, Oregon and Washington: U.S. Geological Survey Professional Paper 1424-B, 82 p.

**D. WELL CONSTRUCTION, OAR 690-200**

D1. Well #: \_\_\_\_\_ Logid: \_\_\_\_\_

D2. **THE WELL does not appear to meet current well construction standards based upon:**

- a.  review of the well log;
- b.  field inspection by \_\_\_\_\_;
- c.  report of CWRE \_\_\_\_\_;
- d.  other: (specify) \_\_\_\_\_

D3. **THE WELL construction deficiency or other comment is described as follows:** \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

D4.  **Route to the Well Construction and Compliance Section for a review of existing well construction.**

**Water Availability Tables**



**DETAILED REPORT ON THE WATER AVAILABILITY CALCULATION**


watershed ID #: 182  
 Time: 1:28 PM

WILLAMETTE R > COLUMBIA R - AB MOLALLA R  
 Basin: WILLAMETTE

Exceedance Level: 80  
 Date: 07/31/2015

Month	Natural Stream Flow	Consumptive Use and Storage	Expected Stream Flow	Reserved Stream Flow	Instream Requirements	Net Water Available
Monthly values are in cfs. Storage is the annual amount at 50% exceedance in ac-ft.						
JAN	21,400.00	2,290.00	19,100.00	0.00	1,500.00	17,600.00
FEB	23,200.00	7,470.00	15,700.00	0.00	1,500.00	14,200.00
MAR	22,400.00	7,250.00	15,100.00	0.00	1,500.00	13,600.00
APR	19,900.00	6,910.00	13,000.00	0.00	1,500.00	11,500.00
MAY	16,600.00	4,230.00	12,400.00	0.00	1,500.00	10,900.00
JUN	8,740.00	1,980.00	6,760.00	0.00	1,500.00	5,260.00
JUL	4,980.00	1,800.00	3,180.00	0.00	1,500.00	1,680.00
AUG	3,830.00	1,650.00	2,180.00	0.00	1,500.00	682.00
SEP	3,890.00	1,400.00	2,490.00	0.00	1,500.00	993.00
OCT	4,850.00	749.00	4,100.00	0.00	1,500.00	2,600.00
NOV	10,200.00	880.00	9,320.00	0.00	1,500.00	7,820.00
DEC	19,300.00	961.00	18,300.00	0.00	1,500.00	16,800.00
ANN	15,200,000	2,250,000	13,000,000	0	1,090,000	11,900,000

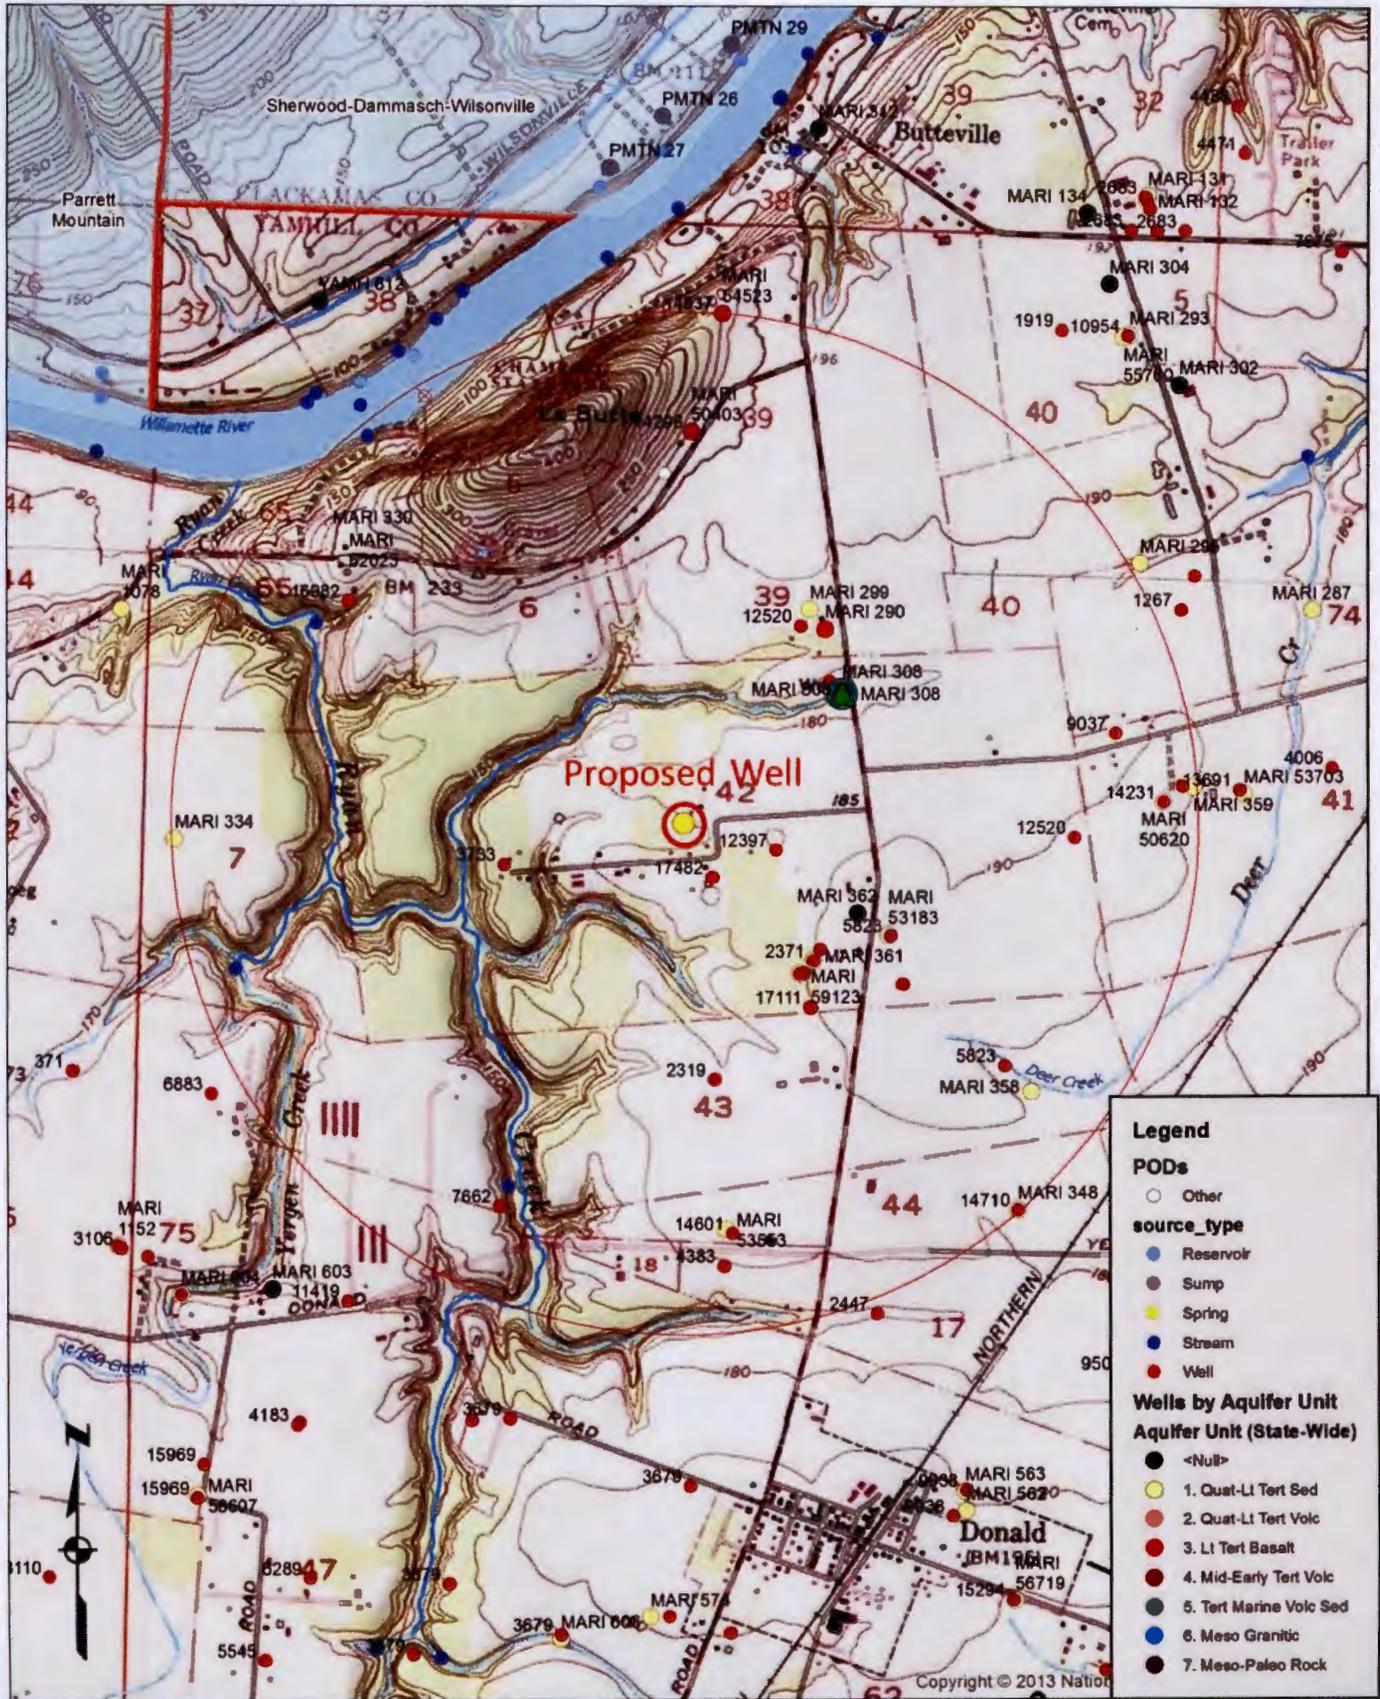

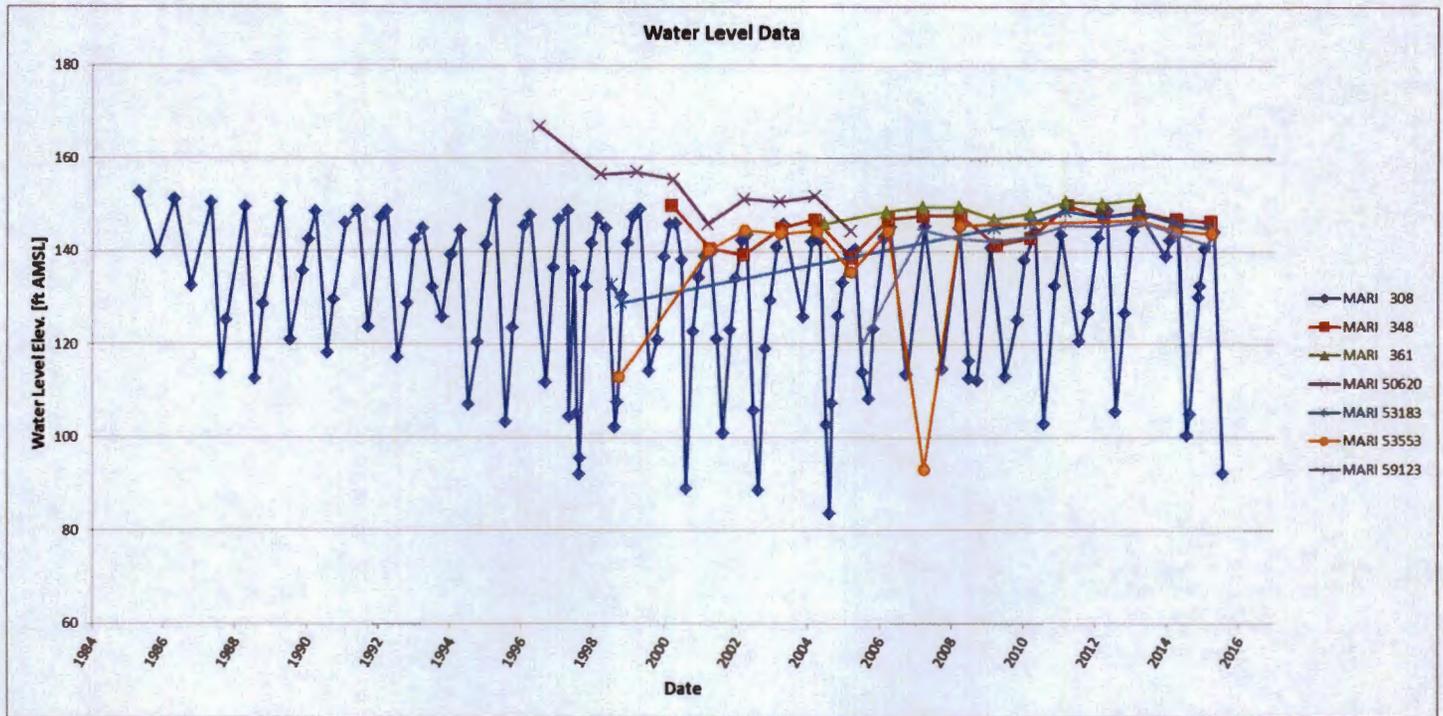

Well logs attached: (nearby wells with similar construction as that proposed on this application)

MARI 53553

MARI 53183

MARI 358