


UMAT 56489

Appl. G - 8597

RECEIVED

JAN 3 1978

WATER RESOURCES DEPT.
SALEM, OREGON

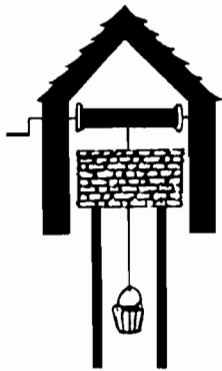

AMERICAN

DEVELOPMENT & DRILLING

Water Wells

WELL LOG

Mr. Raymond Bevans
Lowden, Washington 99342

FEET		MATERIAL
From	To	
0	61	cemented gravel
61	73	red clay water bearing
73	77	gravel & clay water bearing
77	121	cemented gravel
121	141	loose gravel
141	162	cemented gravel
162	168	cement pea gravel
168	243	cemented gravel course
243	276	cemented gravel water bearing

158/ft. of 8/in. casing from 10/ft. to 158/ft.
 120/ft. of perforations
 Hole blowing 150/G.P.M. to 200/G.P.M.
 Static level 19/ft.
 Surface seal Bentonite