

Mar 1
53073


(START CARD) # 95209

Instructions for completing this report are on the last page of this form.

Date 5/14/98

ORIGINAL & FIRST COPY-WATER RESOURCES DEPARTMENT SECOND COPY-CONSTRUCTOR THIRD COPY-CUSTOMER

**OREGON FLOWERS, INC.
3/6/98 Well Test @ 500 GPM**

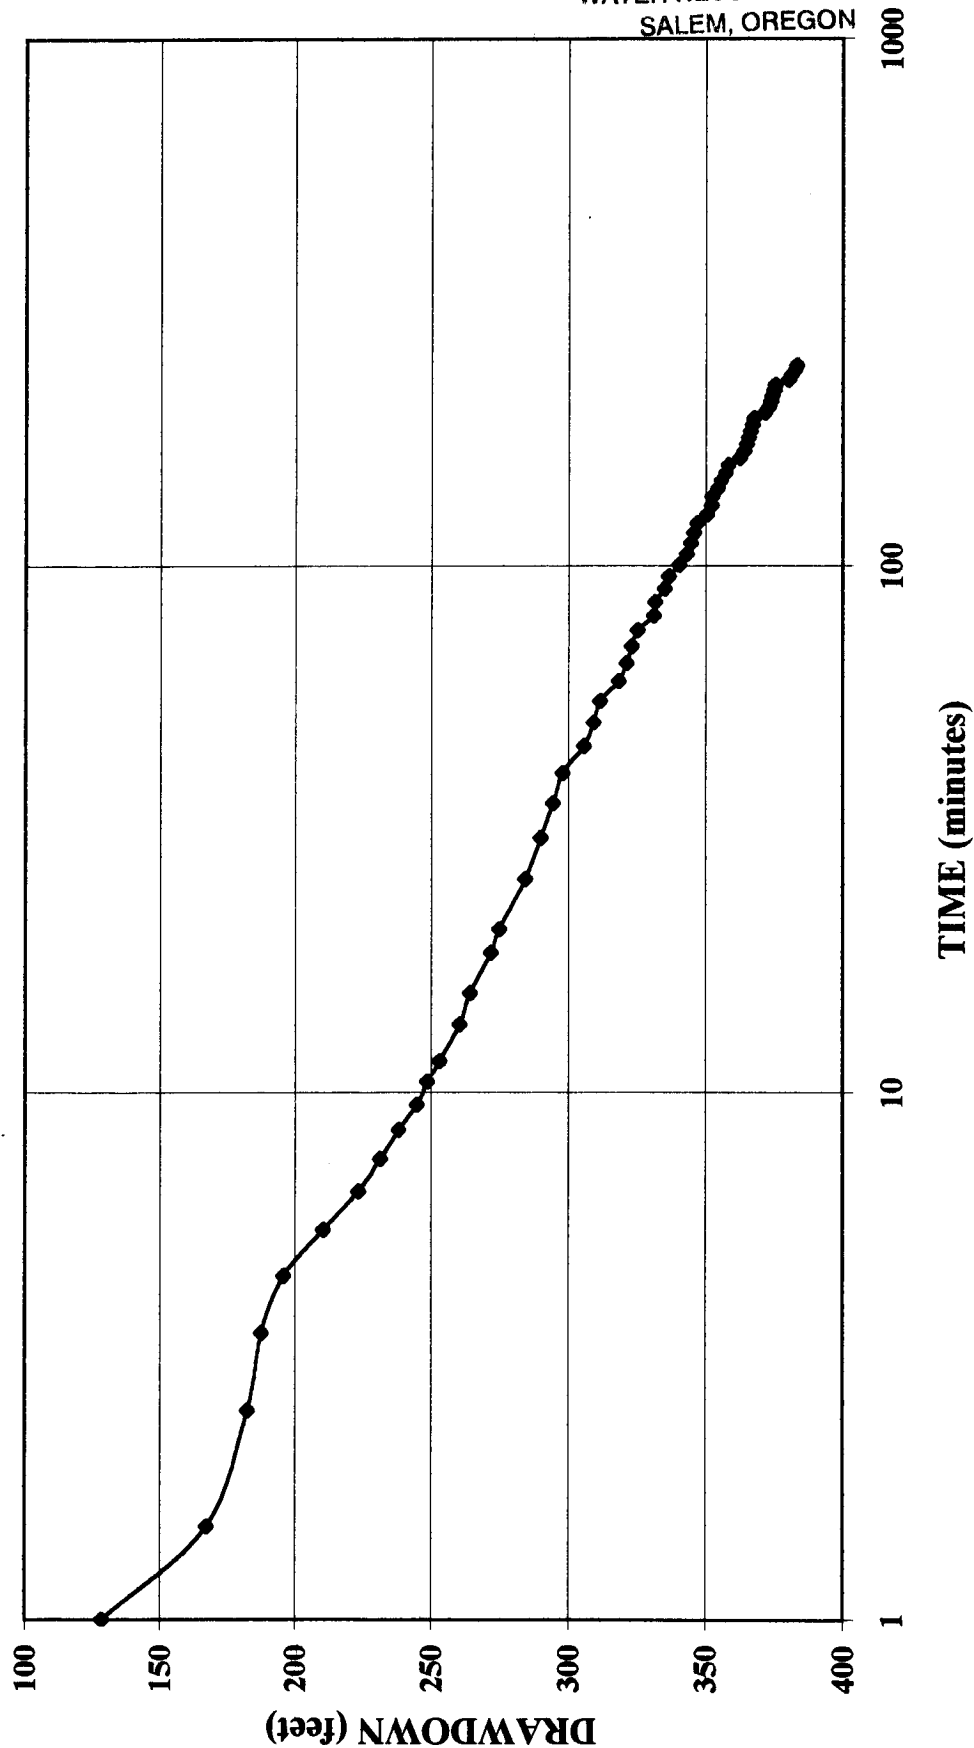


RECEIVED

MAY 18 1998

WATER RESOURCES DEPT.
SALEM, OREGON

OREGON FLOWERS, INC.
3/6/98 Recovery

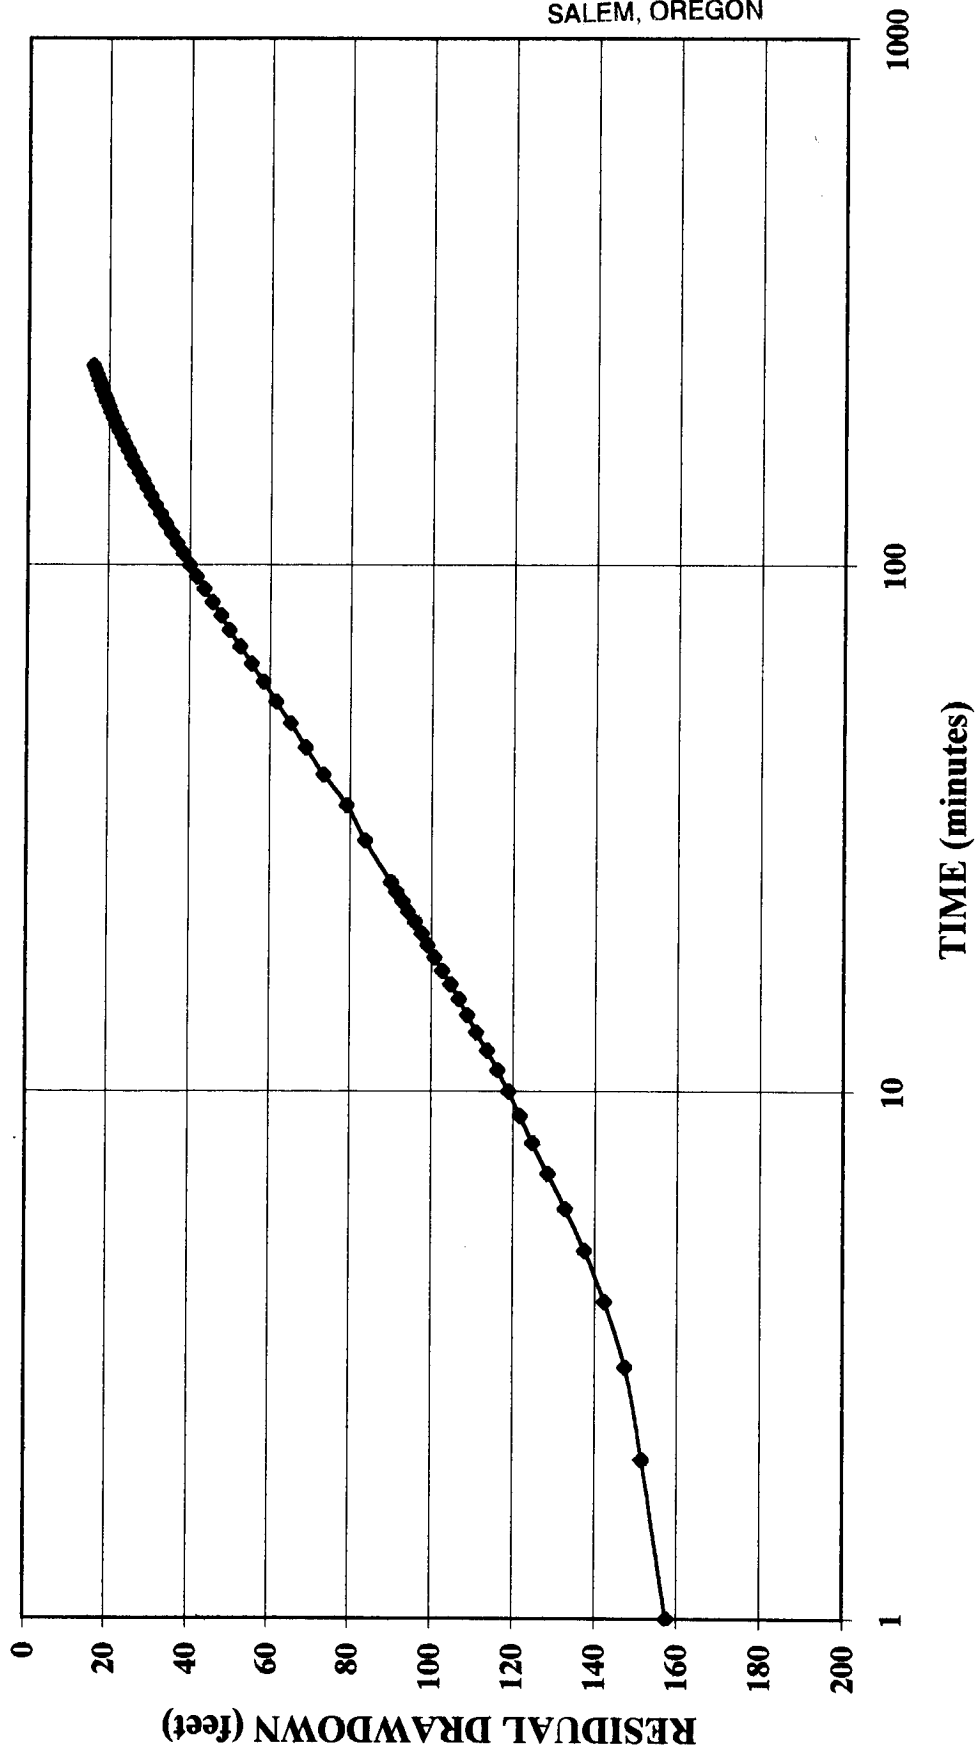


RECEIVED

MAY 18 1998

WATER RESOURCES DEPT.
SALEM, OREGON

**OREGON FLOWERS, INC.
3/9-10/98 Well Test @ 400 GPM**

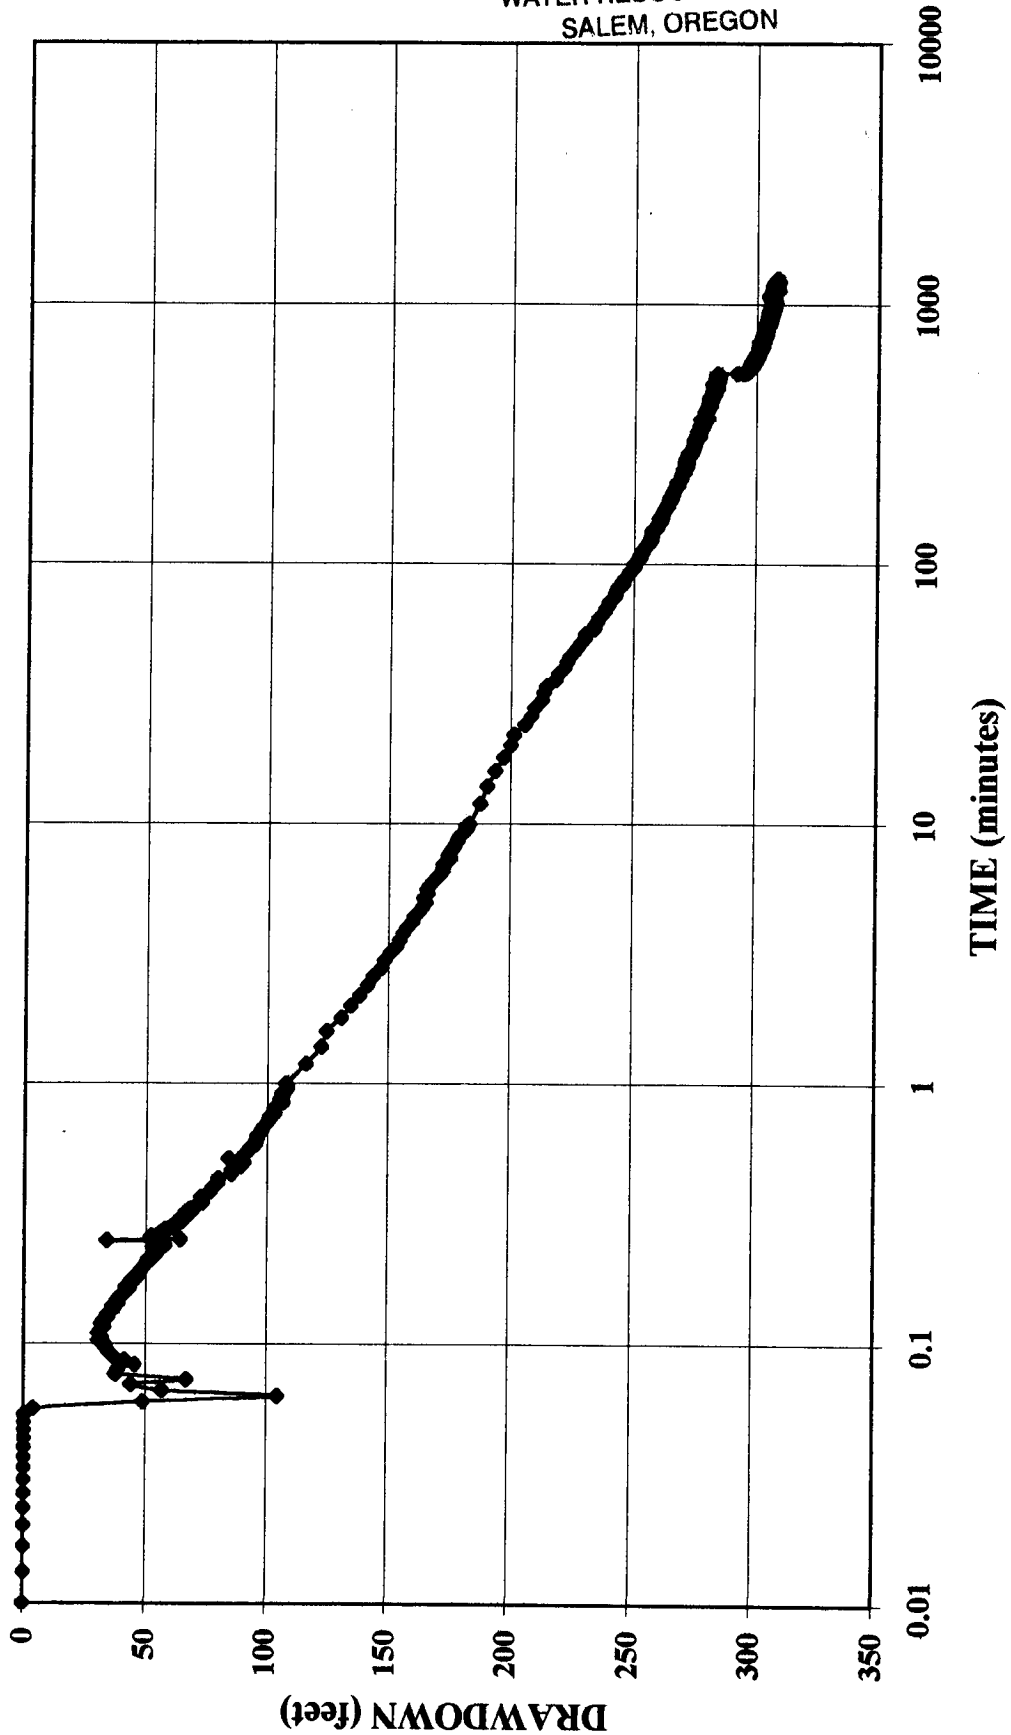


RECEIVED

MAY 18 1998

WATER RESOURCES DEPT.
SALEM, OREGON

**OREGON FLOWERS, INC.
3/10-12/98 Recovery**

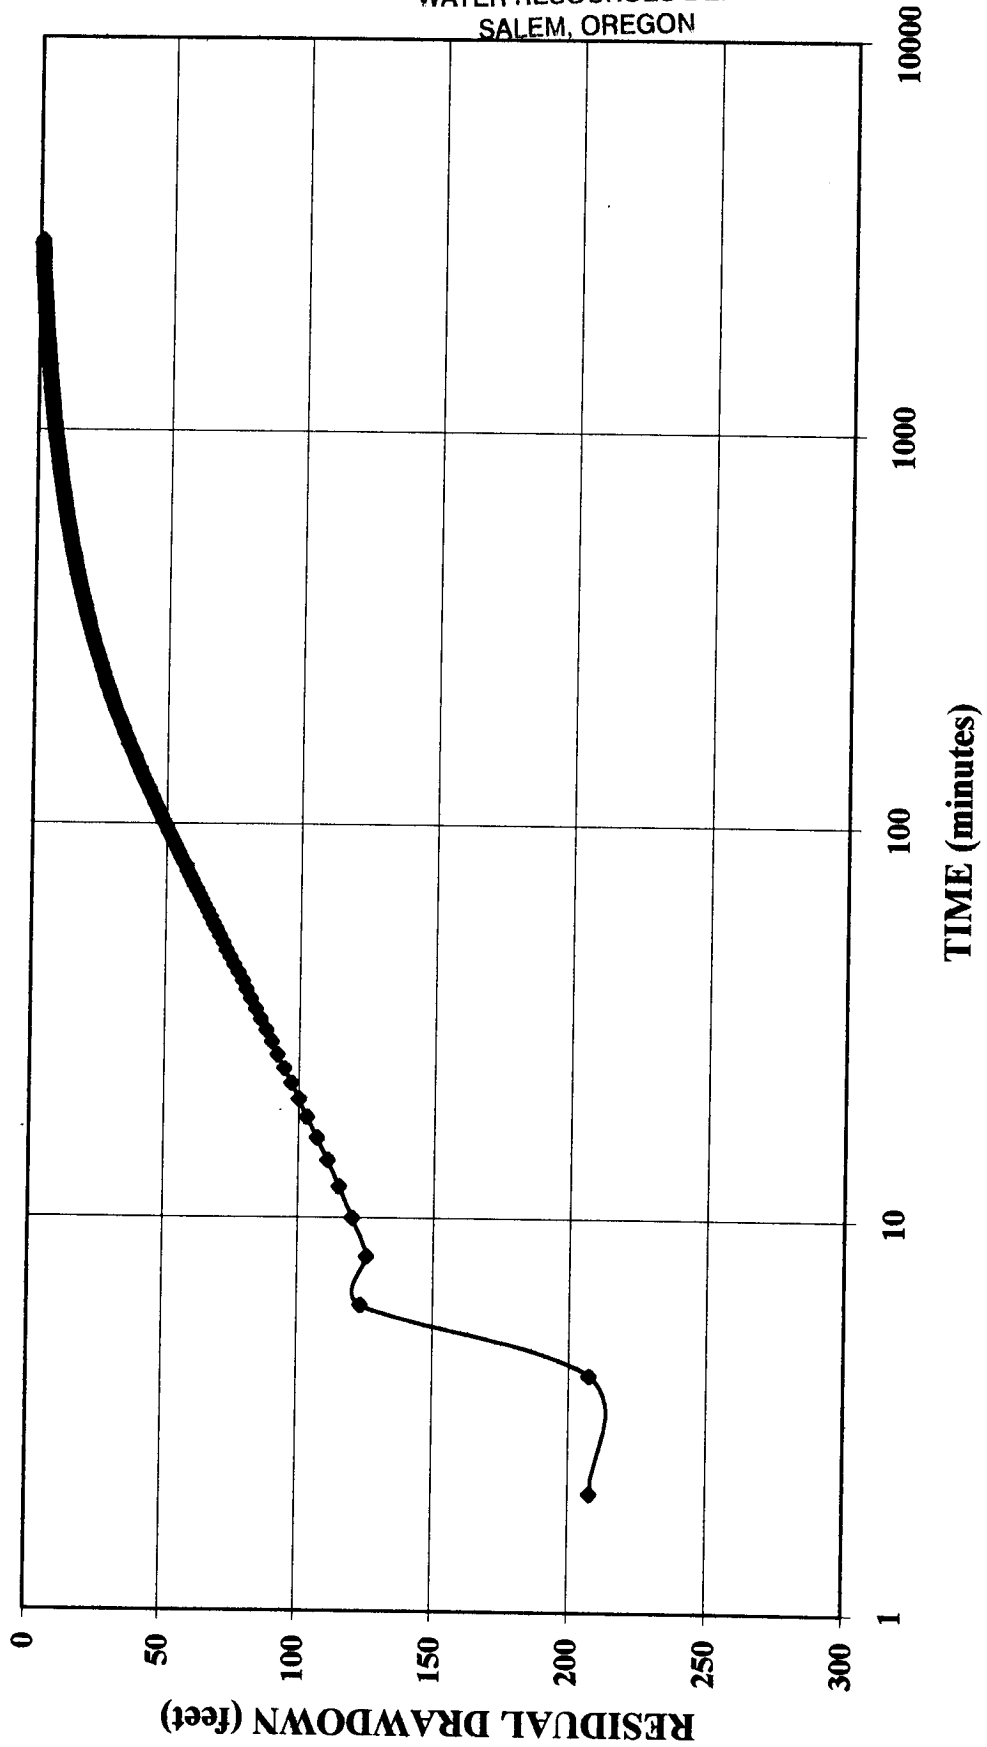

RECEIVED

MAY 18 1998

OREGON FLOWERS, INC. WELL LOG
by Schneider Drilling Co.
SC # 95209 - Label # L14904

WATER RESOURCES DEPT.
SALEM, OREGON

<u>From</u>	<u>To</u>	<u>Description</u>
0	1	Top soil
1	22	Clay, brown
22	26	Sand, brown w/some pea gravel, brown
26	52	Clay, brown, w/laycrs of clay, brown, silty
74	90	Clay, gray
90	110	Clay, bluc-gray
110	125	Gravel, 3/4"-, w/ clay, blue
125	132	Clay, gray
132	134	Gravel, med
134	148	Clay, bluc-brown-gray w/gravcl, mcd-small
148	172	Clay, green & gray, hard
172	176	Clay, brown, soft
176	242	Clay, blue-green, sticky
242	290	Clay, grecn-brown, sticky
290	312	Clay, brown
312	333	Clay, bluc-green, gritty
333	355	Clay, brown
355	405	Clay, bluc-green, very sticky
405	430	Clay, blue-green, some soft, some hard
430	446	Clay, gray, soft
446	470	Clay, blue-green, very sticky
470	520	Clay, brown, very sticky
520	523	Clay, brown, sticky
523	575	Clay, bluc, sticky
575	605	Clay, gray, sticky
605	610	Clay, brown, soft, very little wood
610	635	Clay, green-blue, w/lots of wood
635	690	Clay, bluc, soft
690	740	Clay, blue-green, very sticky
740	770	Clay, brown, sticky
770	772	Clay, brown, very sticky
772	842	Clay, red
842	899	Rock, gray-pink-brown-red, w/clay, brown & red
899	919	Basalt, gray
919	944	Basalt, gray, med-hard, fractured
944	970	Basalt, gray, mcd-hard, fractured, some claystone
970	980	Basalt, brown, soft, fractured, vesicular
980	990	Basalt, gray & brown, mcd-soft, fractured, some vcs
990	1000	Basalt, gray, med-hard, fractured
1000	1019	Basalt, gray, hard, fractured
1019	1032	Basalt, black, med-hard, well-fractured
1032	1064	Basalt, gray, hard
1064	1071	Basalt, gray, hard, some fractures
1071	1076	Basalt, gray, hard
1076	1087	Basalt, brown & gray, med, fractured
1087	1097	Basalt, brown & gray, mcd-hard, fractured