



# City of La Grande Hwy 30 Well

By Schneider Drilling Co.

Start Card #118725 - Well Label #L14876

**RECEIVED**

JUL 01 1999

WATER RESOURCES DEPT.  
SALEM, OREGON

Depth		
From	To	Description
0	1	Gravel, crushed
1	7	Clay, black/gray, medium
7	18	Sand, black/brown, w/clay binder
18	22	Gravel, 6"- & sand, coarse; multi-colored
22	62	Gravel, 6"- & sand; multi-colored
62	68	Cobbles & gravel; brown
68	97	Gravel, 4"- & sand, coarse, brown
97	104	Gravel, 4"- w/sandy clay binder, brown
104	119	Gravel, 6"- & cobbles & sand, coarse; multi colored
119	122	Gravel, 4"- & sand, coarse, w/clay binder; brown
122	127	Gravel, 4"- & sand, coarse; multi-color, w/little clay, brown
127	128	Gravel & cobbles & sand, coarse, w/little clay; multi-colored
128	130	Gravel & sand, w/clay, brown
130	133	Gravel, 6"- & sand, coarse; multi-color, w/little clay
133	150	Gravel & cobbles w/sand, coarse; multi-colored
150	154	Gravel, 4"-, multi-colored, w/cementation
154	156	Gravel, multi-colored w/clay, brown
156	158	Clay, brown, soft
158	162	Gravel, 4"- & some sand, coarse; multi-colored
162	164	Gravel, 4"- & sand, coarse, w/clay, brown
164	167	Clay, brown, medium, sandy
167	169	Gravel, 4"- & sand, coarse, w/clay, brown
169	189	Gravel, 4"- & sand, coarse, w/cementation
189	200	Clay, brown, silty & some gravel, medium
200	204	Gravel, 2-1/2"- & sand, coarse & some clay
204	206	Clay, brown, sandy & some gravel, soft
206	215	Gravel, 4"- & sand, coarse, w/cementation
215	218	Clay, brown & some gravel, medium
218	226	Gravel, 3"- & sand, coarse
226	230	Clay, brown, sandy & some gravel, medium
230	233	Clay, brown & sand w/some gravel; soft
233	235	Gravel, 2"- & sand, coarse, w/cementation; medium
235	237	Clay, brown, medium, sandy
237	241	Gravel, 2"- & sand, coarse, w/cementation; medium
241	244	Clay, brown, sandy w/some gravel; soft

244	246	Gravel, 2"- & sand, coarse; w/cementation
246	248	Clay, brown, sandy, soft
248	253	Gravel, 2"- & sand, coarse, w/cementation
253	257	Clay, brown, sandy, soft
257	264	Gravel, 2"- & sand, coarse; w/cementation
264	266	Clay, brown & some gravel; soft
266	270	Gravel, 2"- & sand coarse & some clay, brown
270	273	Clay, brown & some gravel; soft
273	276	Clay, blue/gray, soft
276	279	Clay, brown w/some sand, medium
279	283	Gravel, 2"- & sand, coarse, w/clay
283	291	Gravel, 6"- & sand, coarse, w/clay binder
291	292	Clay, gray, sandy, soft, w/gravel
292	295	Gravel, 4"- & sand, coarse, w/clay binder
295	311	Clay, gray, sandy, w/gravel
311	322	Gravel, 2"- & sand, coarse, w/cementation
322	325	Clay, gray/green, sandy, soft
325	336	Gravel, 3"- & sand, coarse, w/cementation
336	338	Clay, gray, w/some gravel; soft
338	343	Gravel, 3"- & sand, coarse, w/clay binder
343	345	Clay, gray, silty, w/some gravel; soft
345	350	Gravel, 2"- & sand, coarse, w/cementation
350	355	Clay, gray & gravel & wood; soft
355	357	Gravel, 2"- & sand, coarse
357	359	Clay, gray, sandy, soft
359	361	Sand, green, w/cementation, soft
361	364	Gravel, 2"- & sand, coarse, w/clay binder
364	371	Gravel, 2"- & sand, coarse, w/cementation
371	375	Clay, gray, w/sand, gravel & wood; medium
375	377	Gravel, 2"- & sand, coarse, w/cementation
377	382	Sand, coarse, medium
382	385	Gravel, 3"- & sand, coarse, medium
385	387	Clay, gray, w/some gravel; medium
387	390	Gravel, 2"- & sand, coarse, w/cementation & some wood
390	395	Gravel, 4"- & sand, coarse, some cementation
395	399	Clay, gray, medium/soft
399	406	Sand, coarse & gravel, small
406	413	Clay, gray, silty, w/wood; medium
413	419	Gravel, 2"- & sand, coarse, medium
419	421	Clay, gray, sandy, soft
421	428	Sand, coarse & gravel, small
428	445	Clay, gray, silty, medium

**RECEIVED**

JUL 01 1999

WATER RESOURCES DEPT.  
SALEM, OREGON

445	455	Gravel, 1"- & sand, coarse
455	465	Clay, gray, medium
465	466	Gravel, 3/4"- & sand, coarse, medium
466	470	Clay, gray, silty, soft
470	474	Gravel, 1-1/2"- & sand, coarse, medium
474	477	Clay, green, sandy, soft
477	479	Gravel, 2"- & sand, coarse, w/clay binder
479	480	Clay, gray, soft
480	481	Gravel, 2"- & sand, coarse
481	490	Gravel, 2-1/2"- & clay, green
490	496	Gravel, 2"- & sand, coarse
496	500	Clay, gray, soft
500	516	Gravel, 2"- & sand, coarse, clay, hard
516	526	Gravel, 2"- & sand, coarse, w/cementation
526	536	Gravel, 2"- & sand, coarse, clay binder
536	550	Clay, gray, w/some gravel; soft

**RECEIVED**

JUL 01 1999

WATER RESOURCES DEPT.  
SALEM, OREGON

WN10  
50520

**RECEIVED**

# City of La Grande Hwy 30 Well

JUL 01 1999

## #L14876 -- SC#118725

WATER RESOURCES DEPT.  
SALEM, OREGON

### Screen-Liner Assembly

from	to	description	length
265	305	16" blank	40
305	322	16" screen	17
322	324	16" blank	2
324	337	16" screen	13
337	344	16" blank	7
344	351	16" screen	7
351	358	16" blank	7
358	359	16 x12 bell	1
359	372	12" screen	13
372	375	12" blank	3
375	396	12" screen	21
396	399	12" blank	3
399	407	12" screen	8
407	412	12" blank	5
412	429	12" screen	17
429	442	12" blank	13
442	456	12" screen	14
456	464	12" blank	8
464	475	12" screen	11
475	479	12" blank	4
479	497	12" screen	18
497	510	12" blank	13
510	531	12" screen	21
531	541	12" blank	10

UN10  
50520


RECEIVED

JUL 01 1999

WATER RESOURCES DEPT  
SALEM, OREGON

# CITY OF LA GRANDE HWY 30 WELL

## Step Test (3hrs/step) - 5/25/99

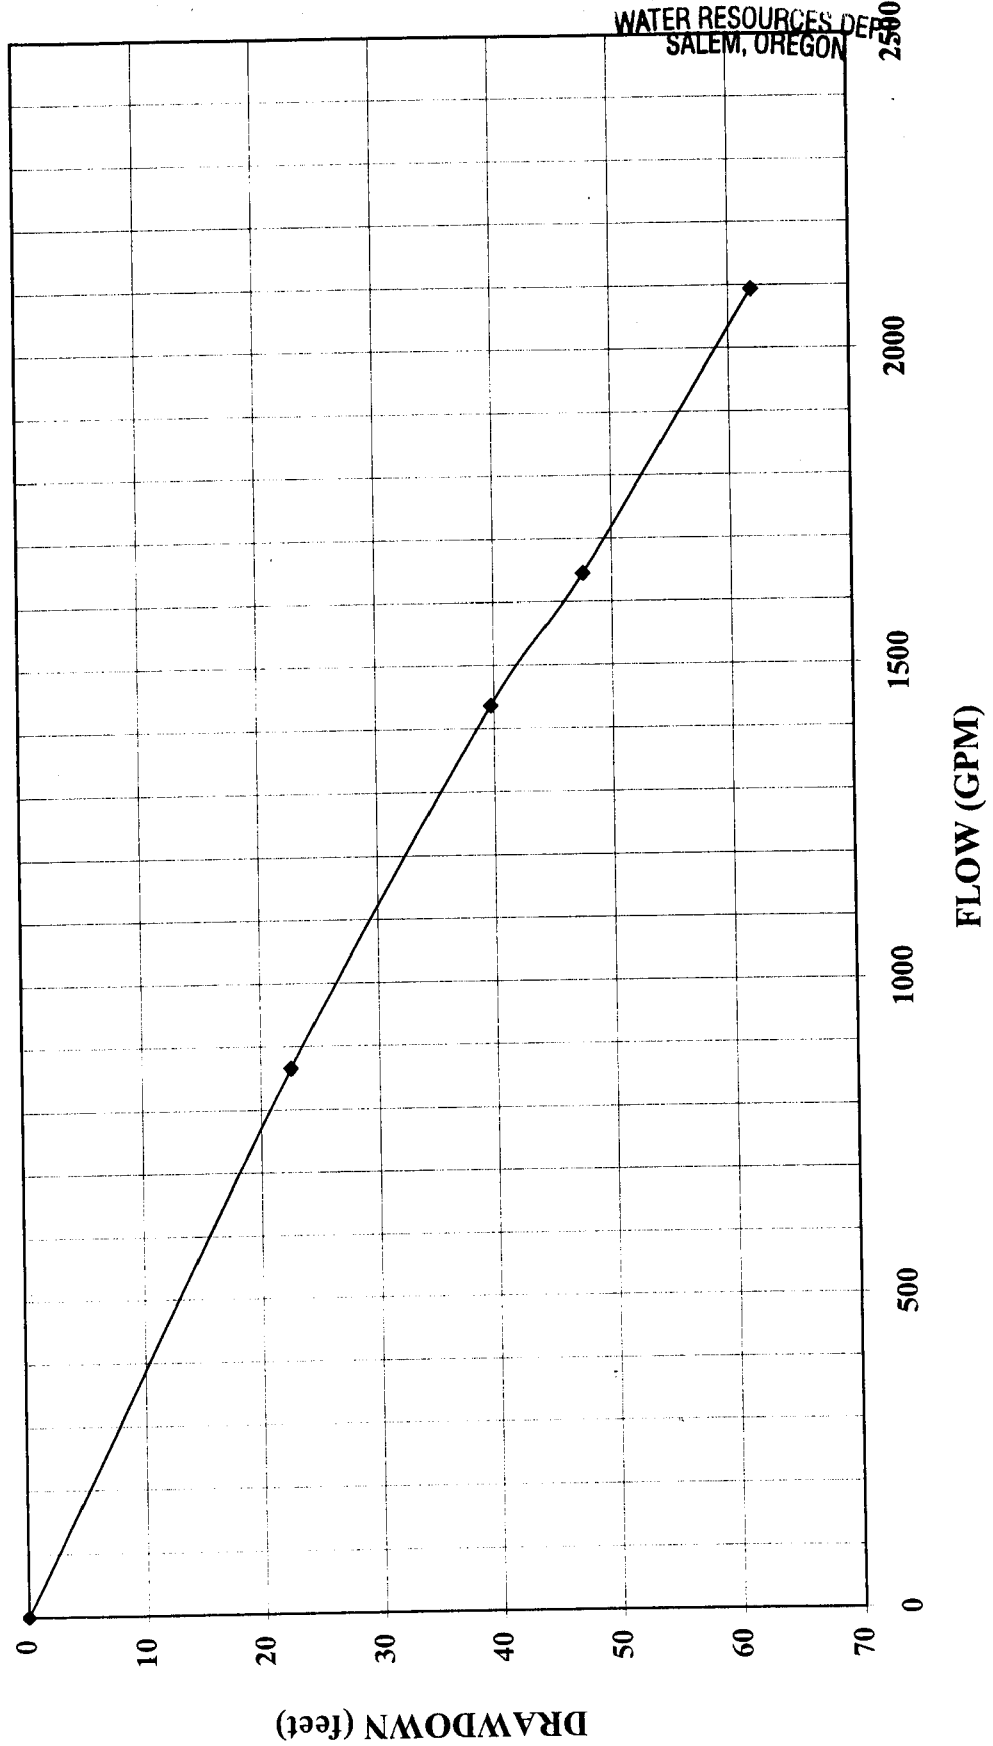

Schneider Drilling Co.


UN10  
50520

RECEIVED

JUL 01 1999

WATER RESOURCES DEPT.  
SALEM, OREGON

**CITY OF LA GRANDE HWY 30 WELL**  
**Pump Test beginning 5/26/99**

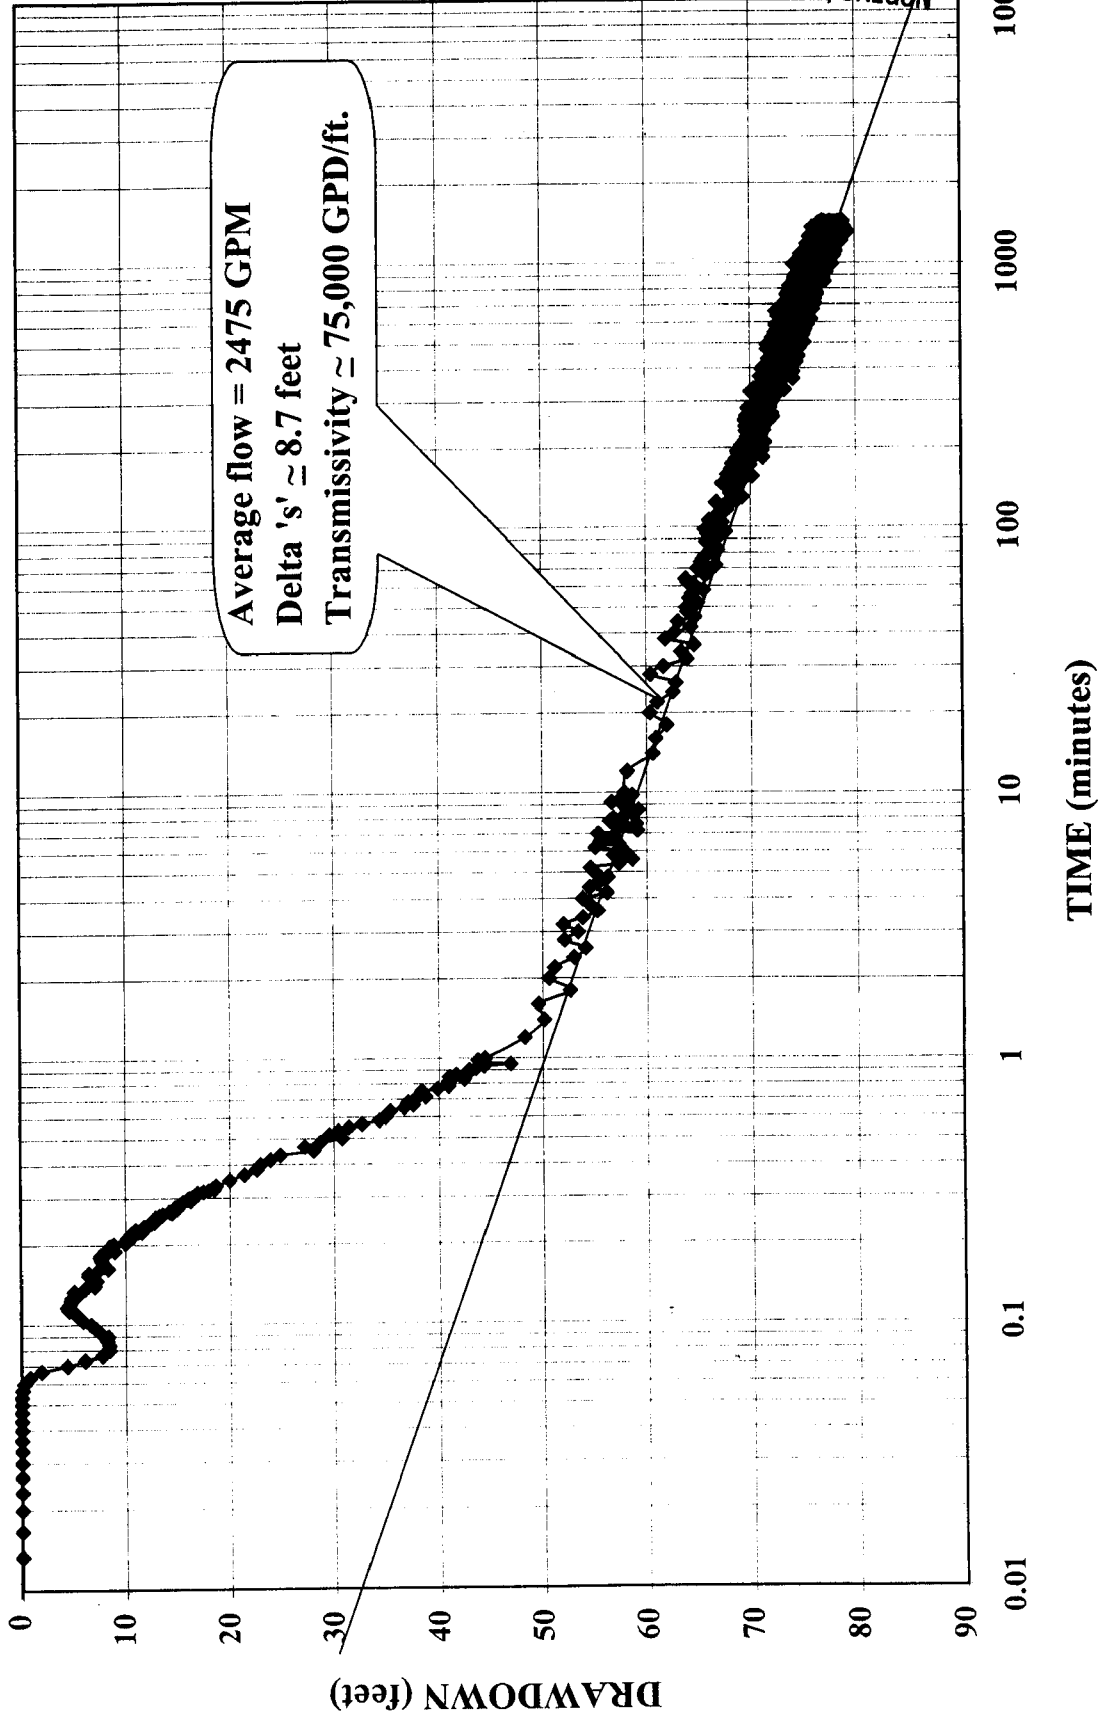


WNID  
60520

RECEIVED

JUL 01 1999

WATER RESOURCES DEPT.  
SALEM, OREGON

CITY OF LA GRANDE HWY 30 WELL  
Recovery beginning 5/27/99

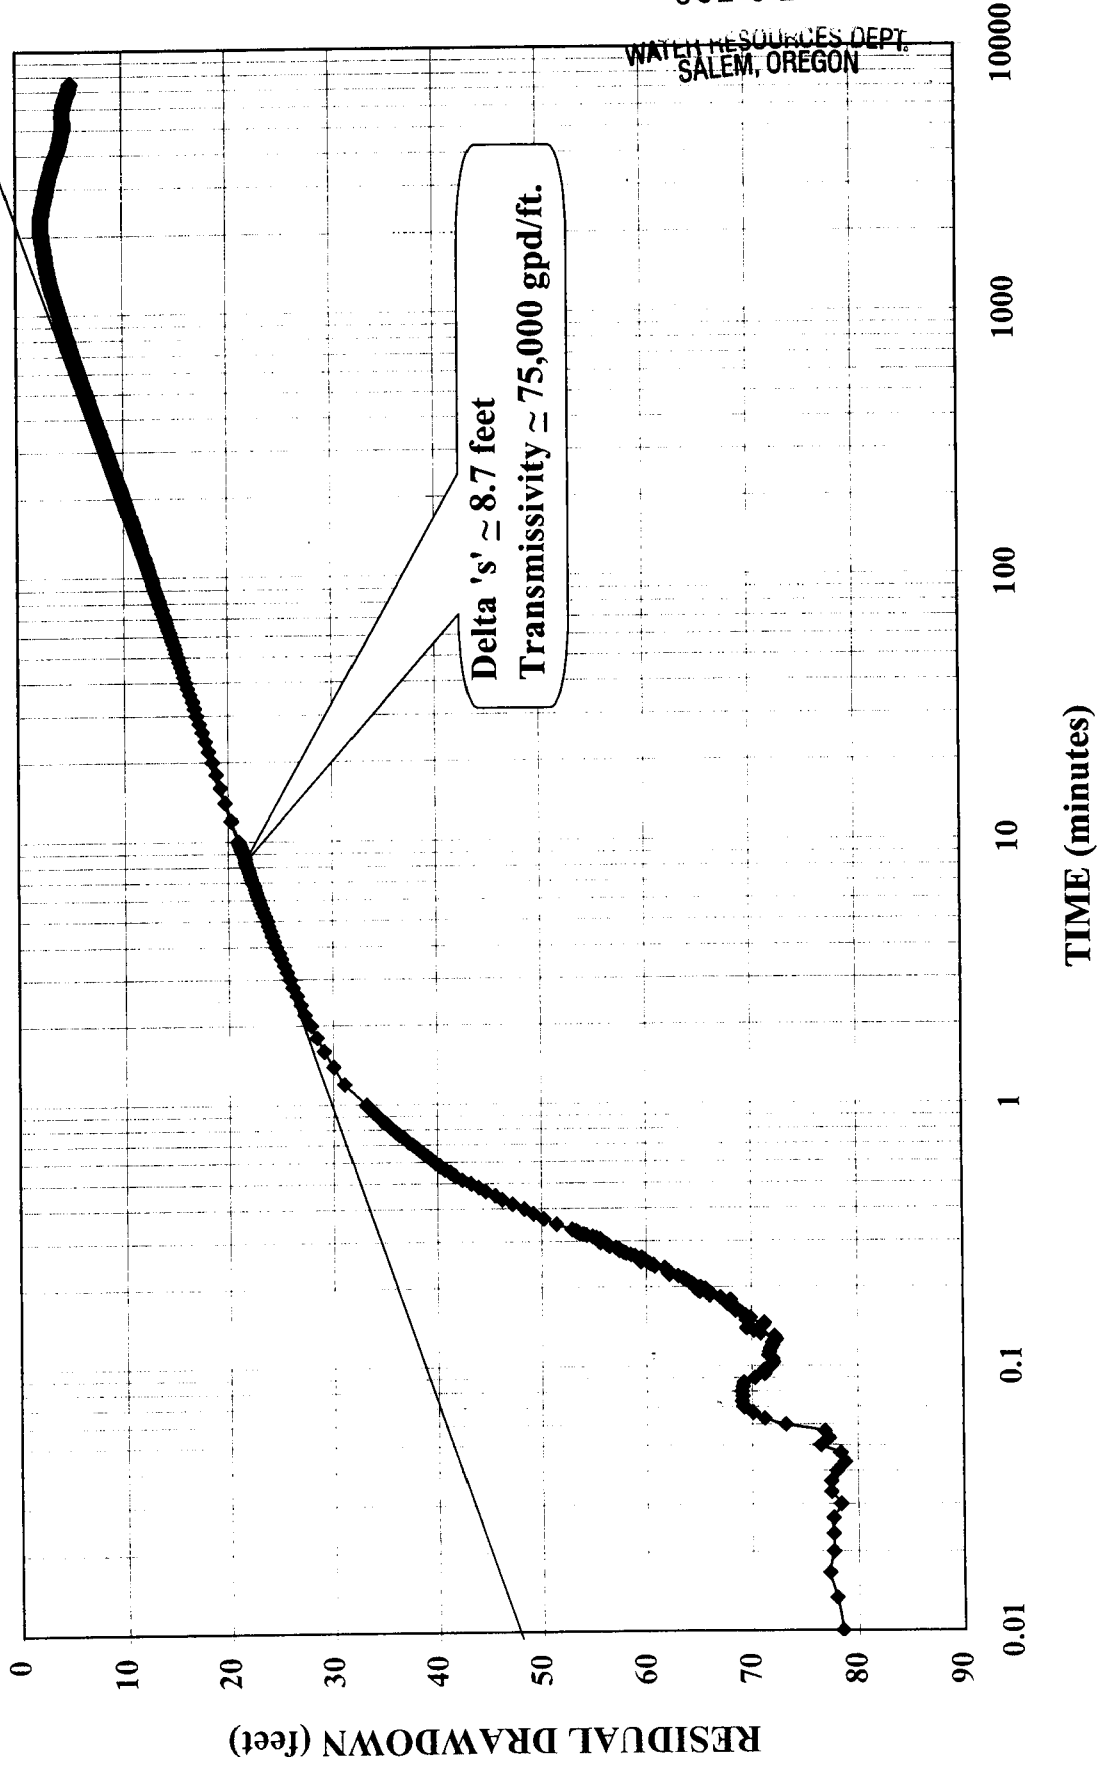

Schneider Drilling Co.

Test data & graphs recovery graph