

City of Sherwood Well No. 6 Well Log

SC#87126 Label #L02186

By Schneider Drilling Co.

1996-1997

<u>From</u>	<u>To</u>	<u>Description</u>
0	1	Top soil
1	2	Gravel 3/4"-
2	12	Clay, brown, medium
12	17	Claystone, brown, medium-soft, broken
17	30	Claystone, brown & gray layers, medium-soft
30	35	Basalt, brown, medium-hard, fractured
35	45	Basalt, gray, medium-hard
45	59	Basalt, gray & brown, medium-soft, fractured, small layer of claystone
59	63	Basalt, gray, medium-hard, fractured
63	65	Basalt, gray, hard
65	88	Basalt, brown w/some gray, medium, fractured
88	96	Basalt, brown, med-soft, fractured
96	100	Basalt, gray, hard
100	105	Basalt, gray, hard, fractured
105	109	Basalt, brown, medium, fractured
109	131	Basalt, gray, hard
131	139	Basalt, gray, hard, some fractures
139	160	Basalt, brown-red, vesicular, medium, w/claystone layers
160	164	Basalt, gray & brown, medium-hard
164	195	Basalt, gray & brown, medium-hard, fractured
195	233	Basalt, gray, hard, fractured
233	241	Basalt, gray, hard
241	251	Basalt, black, soft, vesicular
251	260	Basalt, black & red, soft, vesicular
260	266	Basalt, black, medium-hard, fractured
266	303	Basalt, gray, hard
303	311	Basalt, gray & black, med-soft, vesicular
311	315	Basalt, gray, medium, fractured, some vesicular
315	334	Basalt, gray, hard
334	342	Basalt, black, med-soft, fractured, vesicular, small claystone layers
342	347	Basalt, black, medium, fractured
347	354	Basalt, brown & red, broken, vesicular, some claystone
354	358	Basalt, brown, fractured, vesicular
358	370	Basalt, gray, hard
370	373	Basalt, gray, med-hard, fractured, some vesicular
373	377	Basalt, gray & brown, medium, fractured
377	396	Basalt, gray, hard

RECEIVED

MAR - 4 1997

WATER RESOURCES DEPT.
SALEM, OREGON

RECEIVED

MAR - 4 1997

WATER RESOURCES DEPT.
SALEM, OREGON

396 399 Basalt, black, med-soft, well-fractured
399 401 Basalt, black & red, soft, vesicular, well fractured
401 412 Basalt, black, med-soft, fractured, vesicular
412 416 Basalt, gray, med-hard, fractured, some vesicular
416 435 Basalt, gray, hard
435 441 Basalt, black, med-hard, fractured
441 447 Basalt, black & red, soft, well fractured, vesicular, broken
447 451 Basalt, brown & black, soft, well fractured
451 453 Basalt, brown, red & black, soft, well broken, vesicular, some claystone
453 470 Basalt, black & gray, med-hard, fractured
470 474 Basalt, gray, hard, some fractures
474 490 Basalt, gray, hard
490 493 Basalt, black, med-hard, fractured
493 494 Basalt, red, soft, broken, vesicular, some claystone
494 496 Basalt, black & brown, soft, broken, vesicular, some claystone
496 502 Basalt, black, med-soft, well fractured, some vesicular
502 506 Basalt, black, med-hard, some fractures, some vesicular
506 529 Basalt, gray, hard, fractured
529 533 Basalt, black, med-soft, well fractured, vesicular, some claystone
533 563 Basalt, black, med, fractured, vesicular
563 574 Basalt, gray, med-hard, fractured
574 575 Basalt, gray, hard, fractured
575 605 Basalt, gray w/red streaks, hard, fractured
605 642 Basalt, gray, hard, fractured
642 652 Basalt, black-brown, soft, well fractured, some vesicular
652 657 Basalt, black & red, soft, broken, vesicular
657 674 Basalt, gray & black, med-soft, well fractured
674 678 Basalt, black, med-soft, fractured
678 688 Basalt, gray, hard, some fractures
688 700 Basalt, black, hard
700 737 Basalt, black, hard, some fractures
737 761 Basalt, gray-black, very hard, some fractures
761 762 Basalt, dark gray, very hard
762 767 Basalt, gray, very hard
767 788 Basalt, gray, hard, fractured
788 797 Basalt, black, soft, fractured, vesicular
797 805 Basalt, dark gray, med-hard, fractured, some vesicular
805 813 Basalt, gray, hard, fractured
813 830 Basalt, black, med, well-fractured, vesicular
830 853 Basalt, black, soft, well fractured, vesicular, some claystone layers
853 862 Basalt, black, med, well-fractured, some vesicular
862 892 Basalt, black & brown, soft, well fractured, vesicular
892 901 Basalt, black & brown, soft, broken, some claystone
901 936 Basalt, gray, hard, fractured

RECEIVED

MAR - 4 1997

WATER RESOURCES DEPT.
SALEM, OREGON


936 938 Basalt, black, med-hard, fractured, some claystone
938 943 Basalt, black, med-soft, fractured
943 948 Basalt, gray, med-hard, fractured, some vesicular
948 953 Basalt, gray, hard, fractured
953 960 Basalt, gray, med-soft, fractured, some vesicular, some claystone
960 971 Basalt, gray, med, fractured, w/some quartz
971 986 Basalt, black, med, fractured, some vesicular
986 995 Basalt, gray, hard
995 1014 Basalt, gray, med-soft, broken, vesicular, some claystone
1014 1016 Clay, gray & brown, soft
1016 1023 Clay, gray & brown, soft, little sandy
1023 1030 Clay, blue, med-soft

RECEIVED

MAR - 4 1997

WATER RESOURCES DEPT.
SALEM, OREGON

**SHERWOOD WELL NO.6
1/24/97 STEP 1 - 500 GPM**

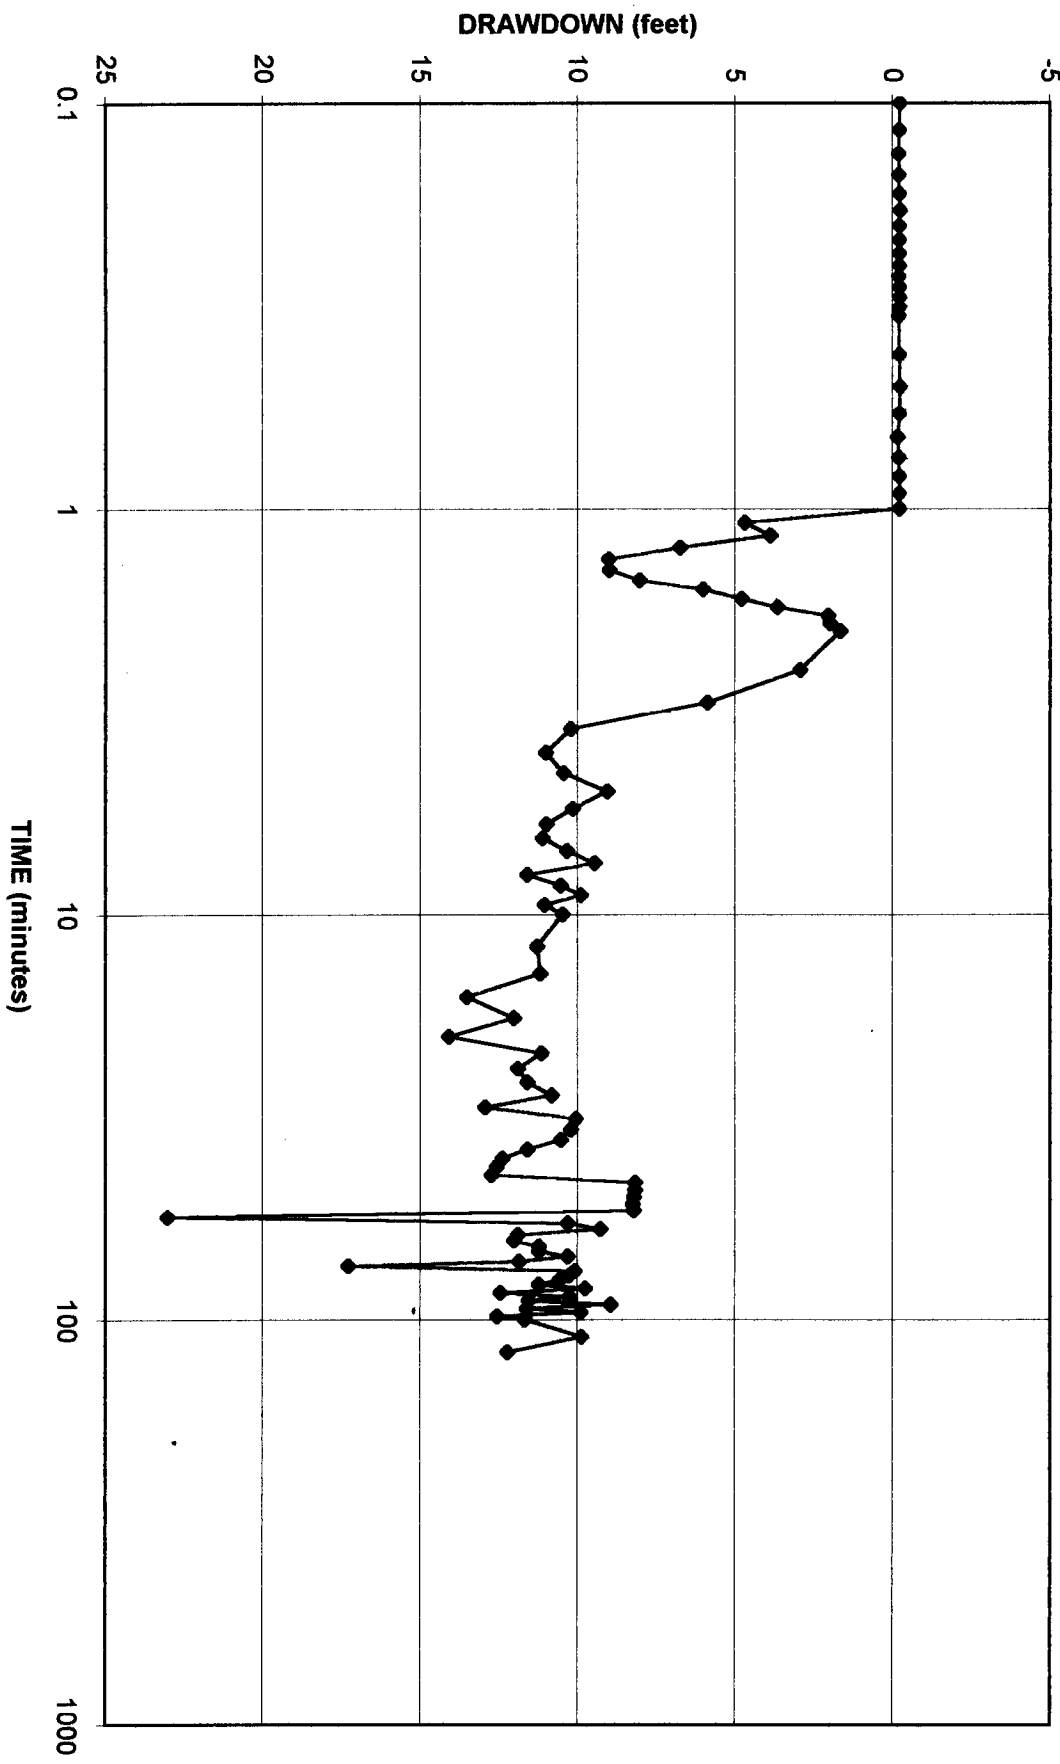


RECEIVED

MAR - 4 1997

**SHERWOOD WELL NO.6
1/24/97 STEP 2 - 1000 GPM**

WATER RESOURCES DEPT.
SALEM, OREGON

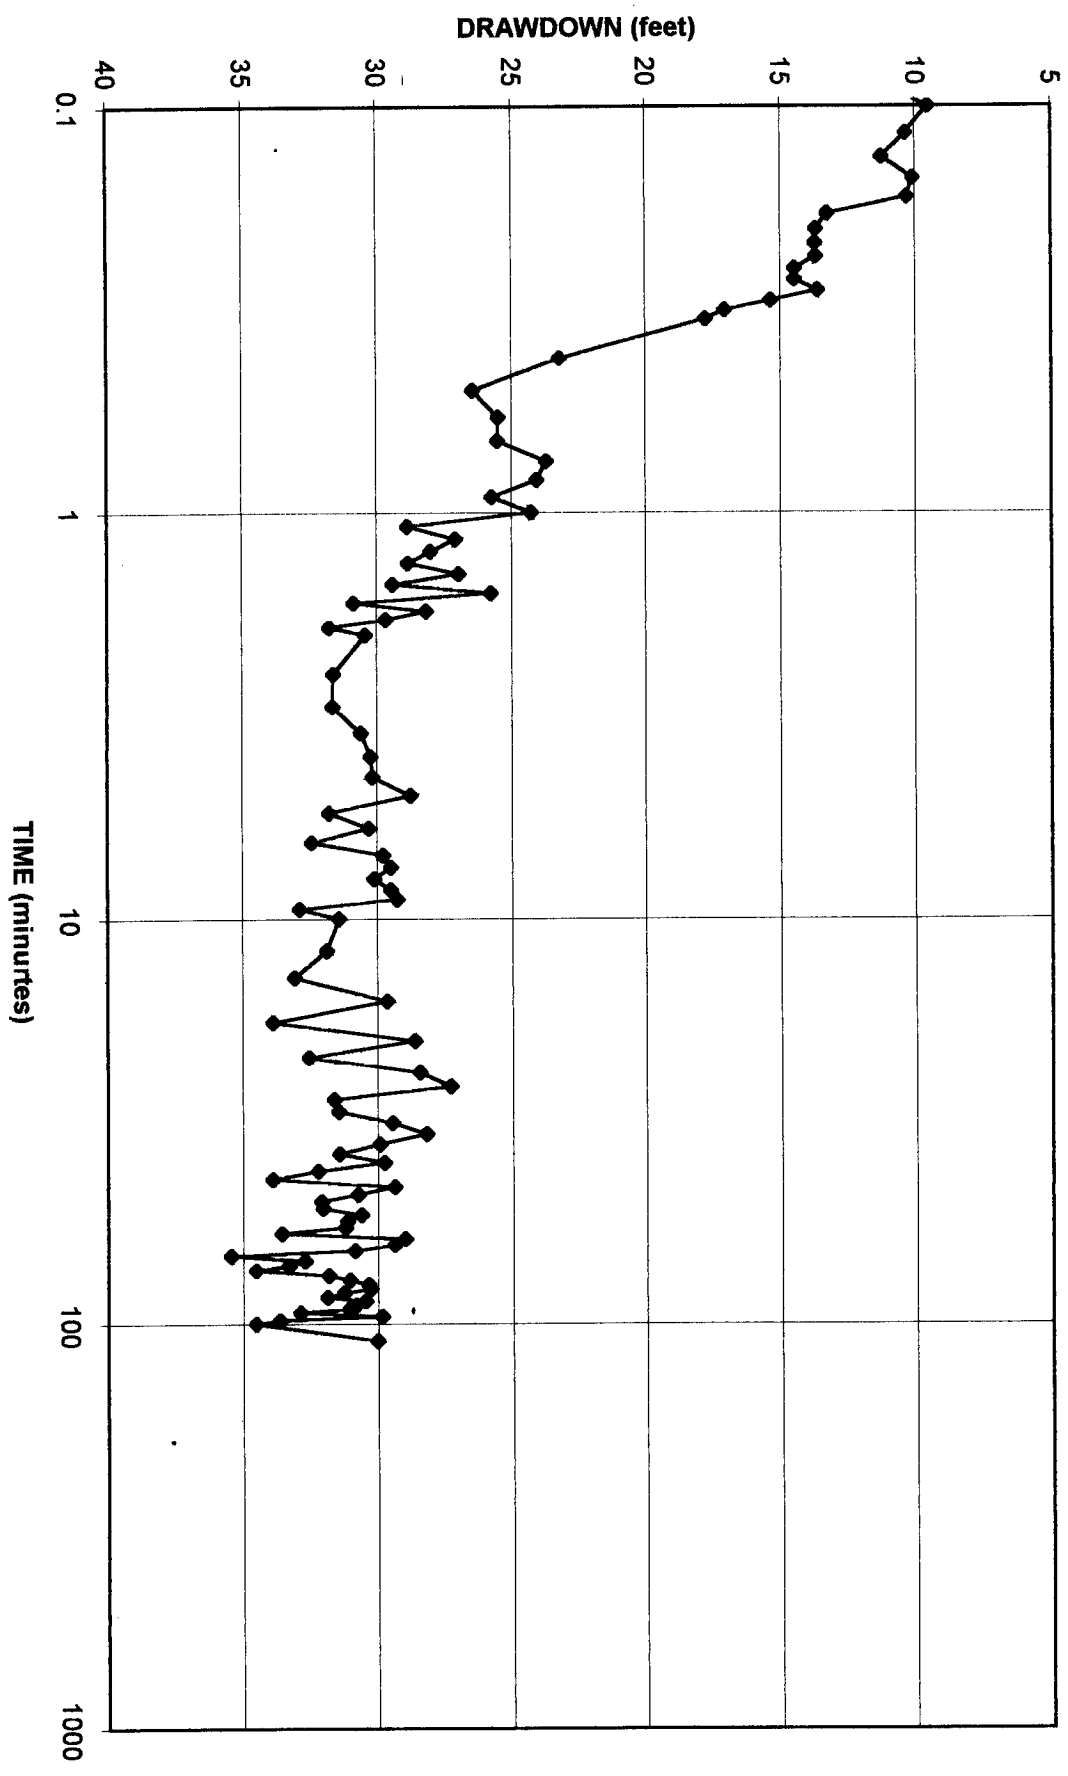


RECEIVED

MAR - 4 1997

**SHERWOOD WELL NO.6
1/24/97 STEP 3 - 1500 GPM**

WATER RESOURCES DEPT.
SALEM, OREGON

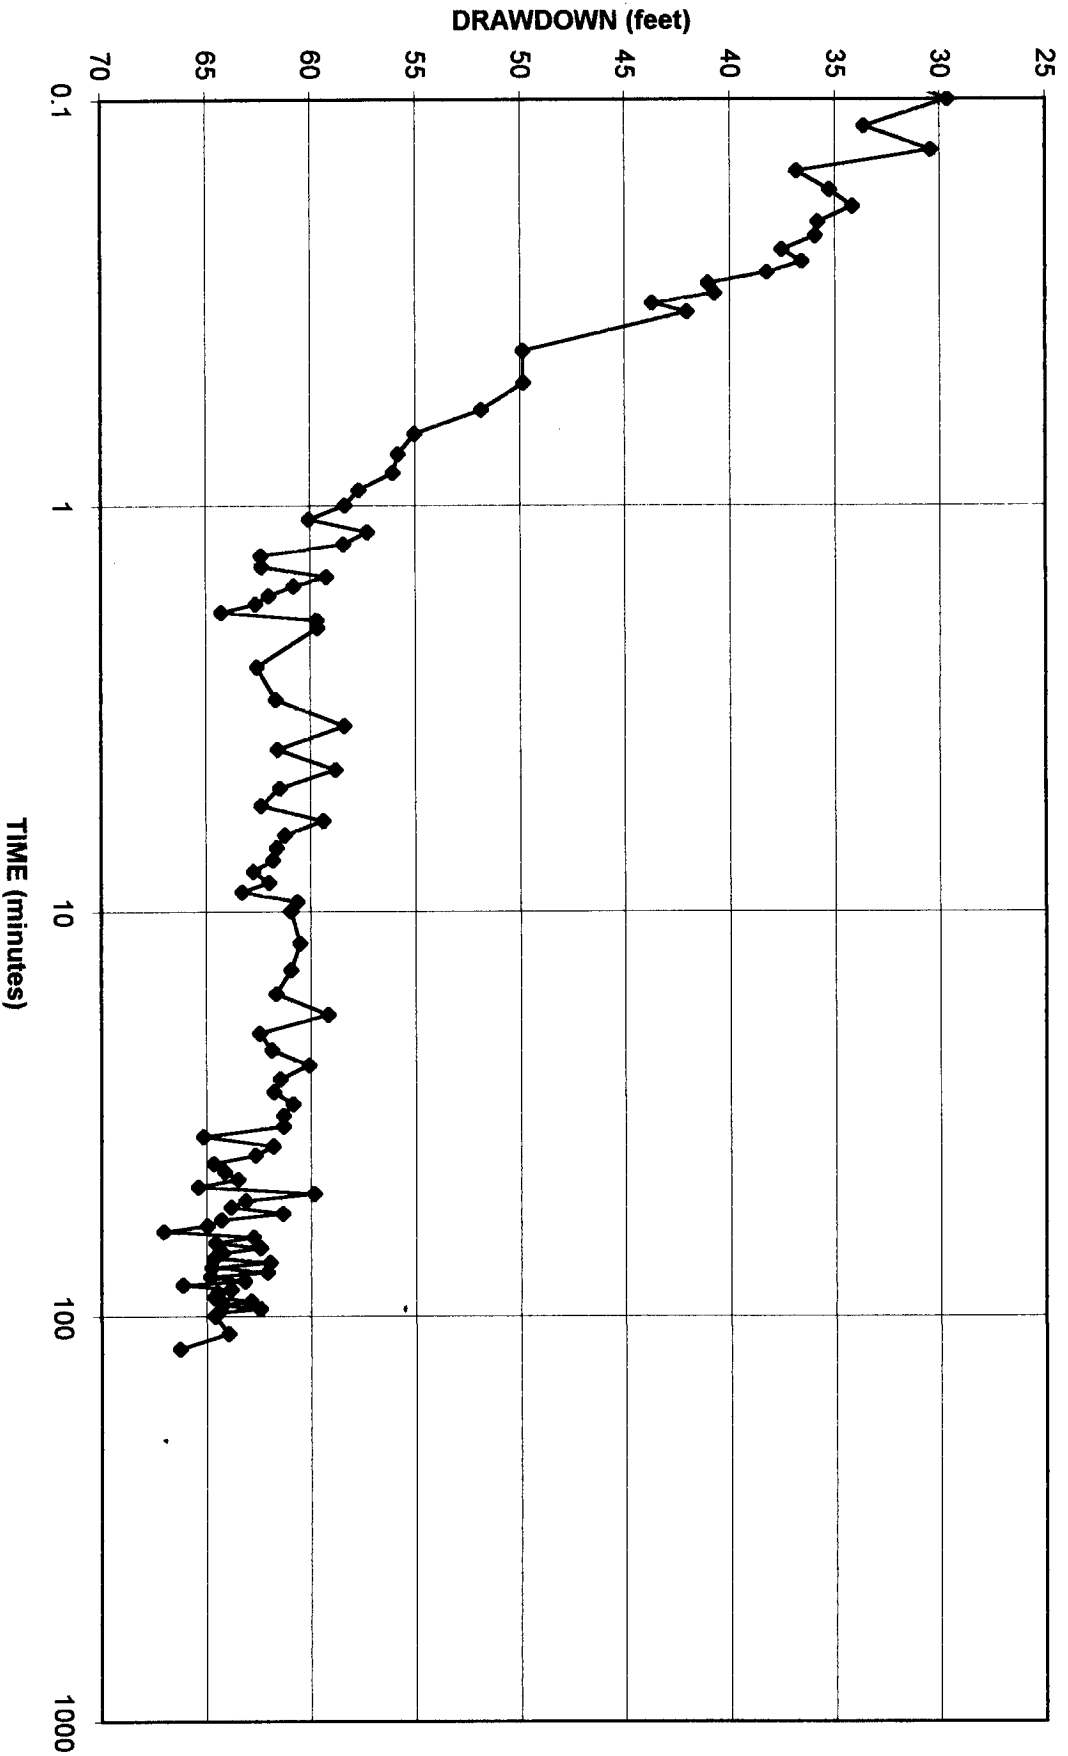


RECEIVED

MAR - 4 1997

WATER RESOURCES DEPT.
SALEM, OREGON

**SHERWOOD WELL NO. 6
1/24/97 STEP 4 - 2000 GPM**

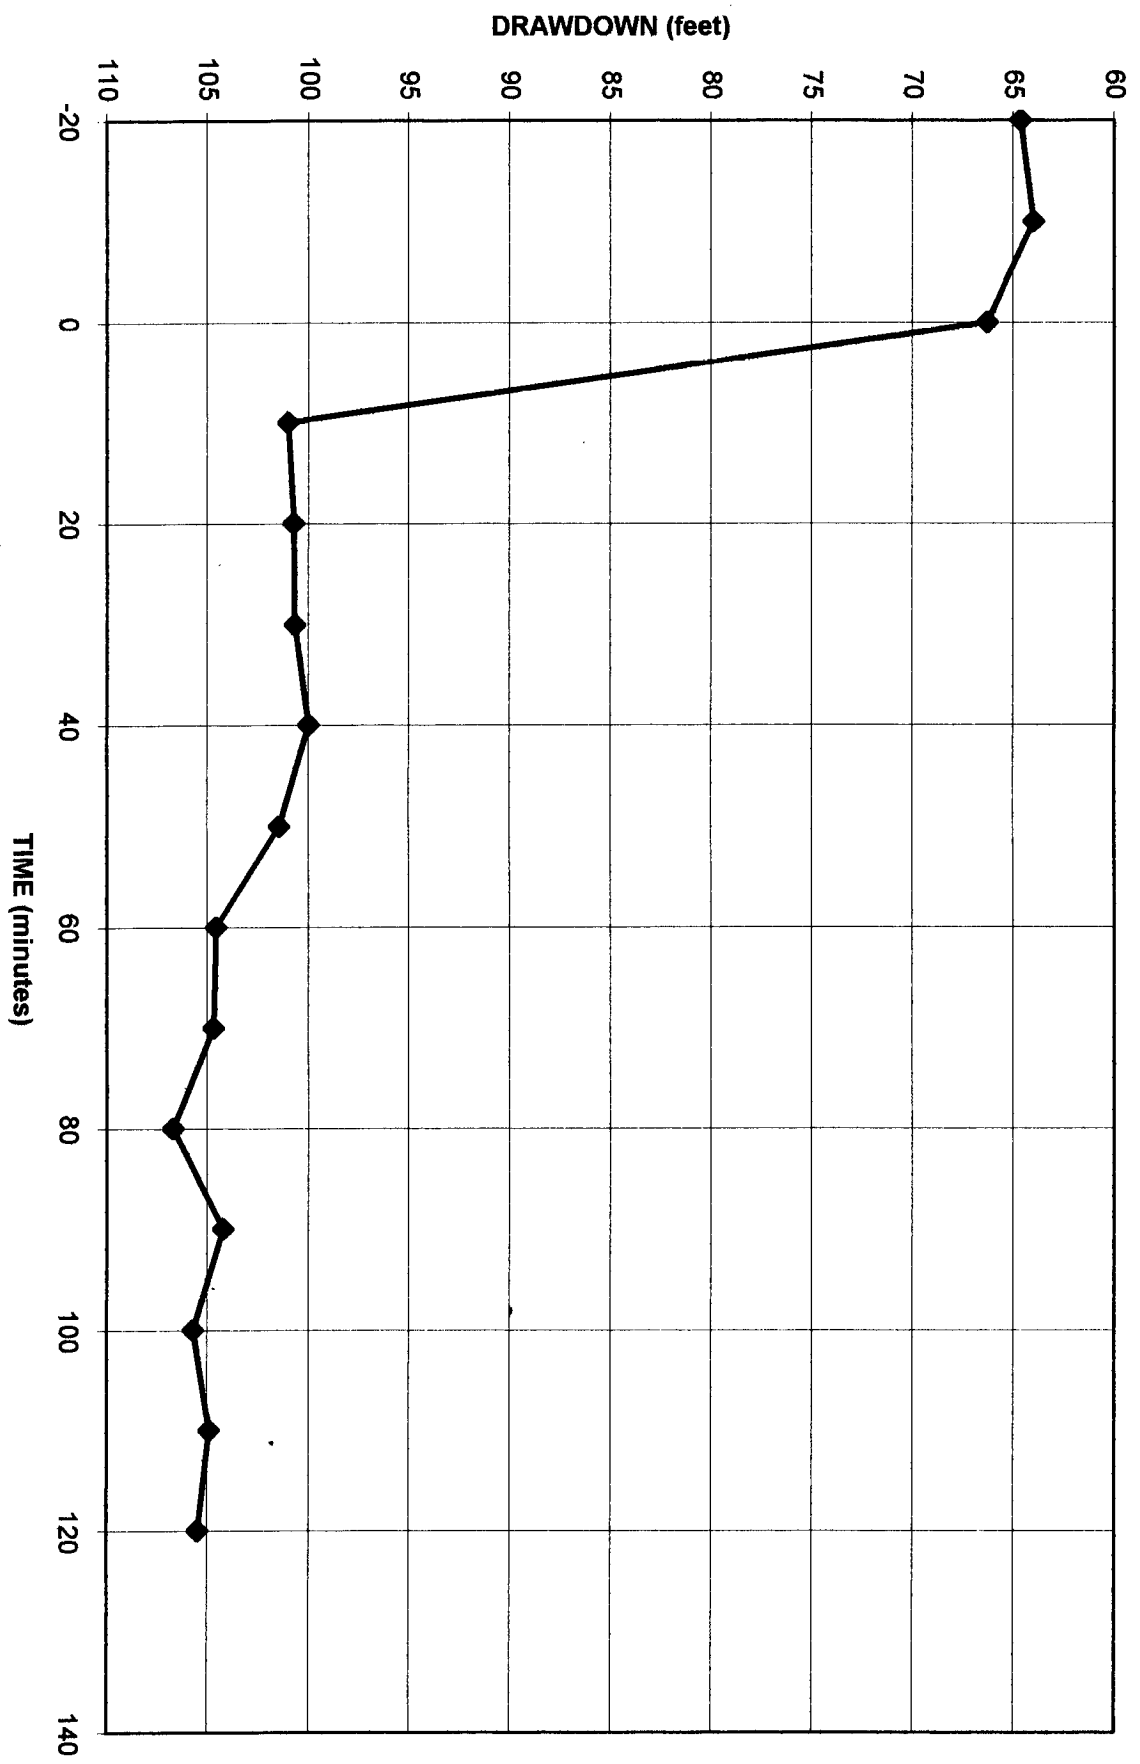

Note: Not logarithmic scale


RECEIVED

SHERWOOD WELL NO. 6

1/30-31/97 - 1100 GPM Test

MAR - 4 1997

WATER RESOURCES DEPT.
SALEM, OREGON

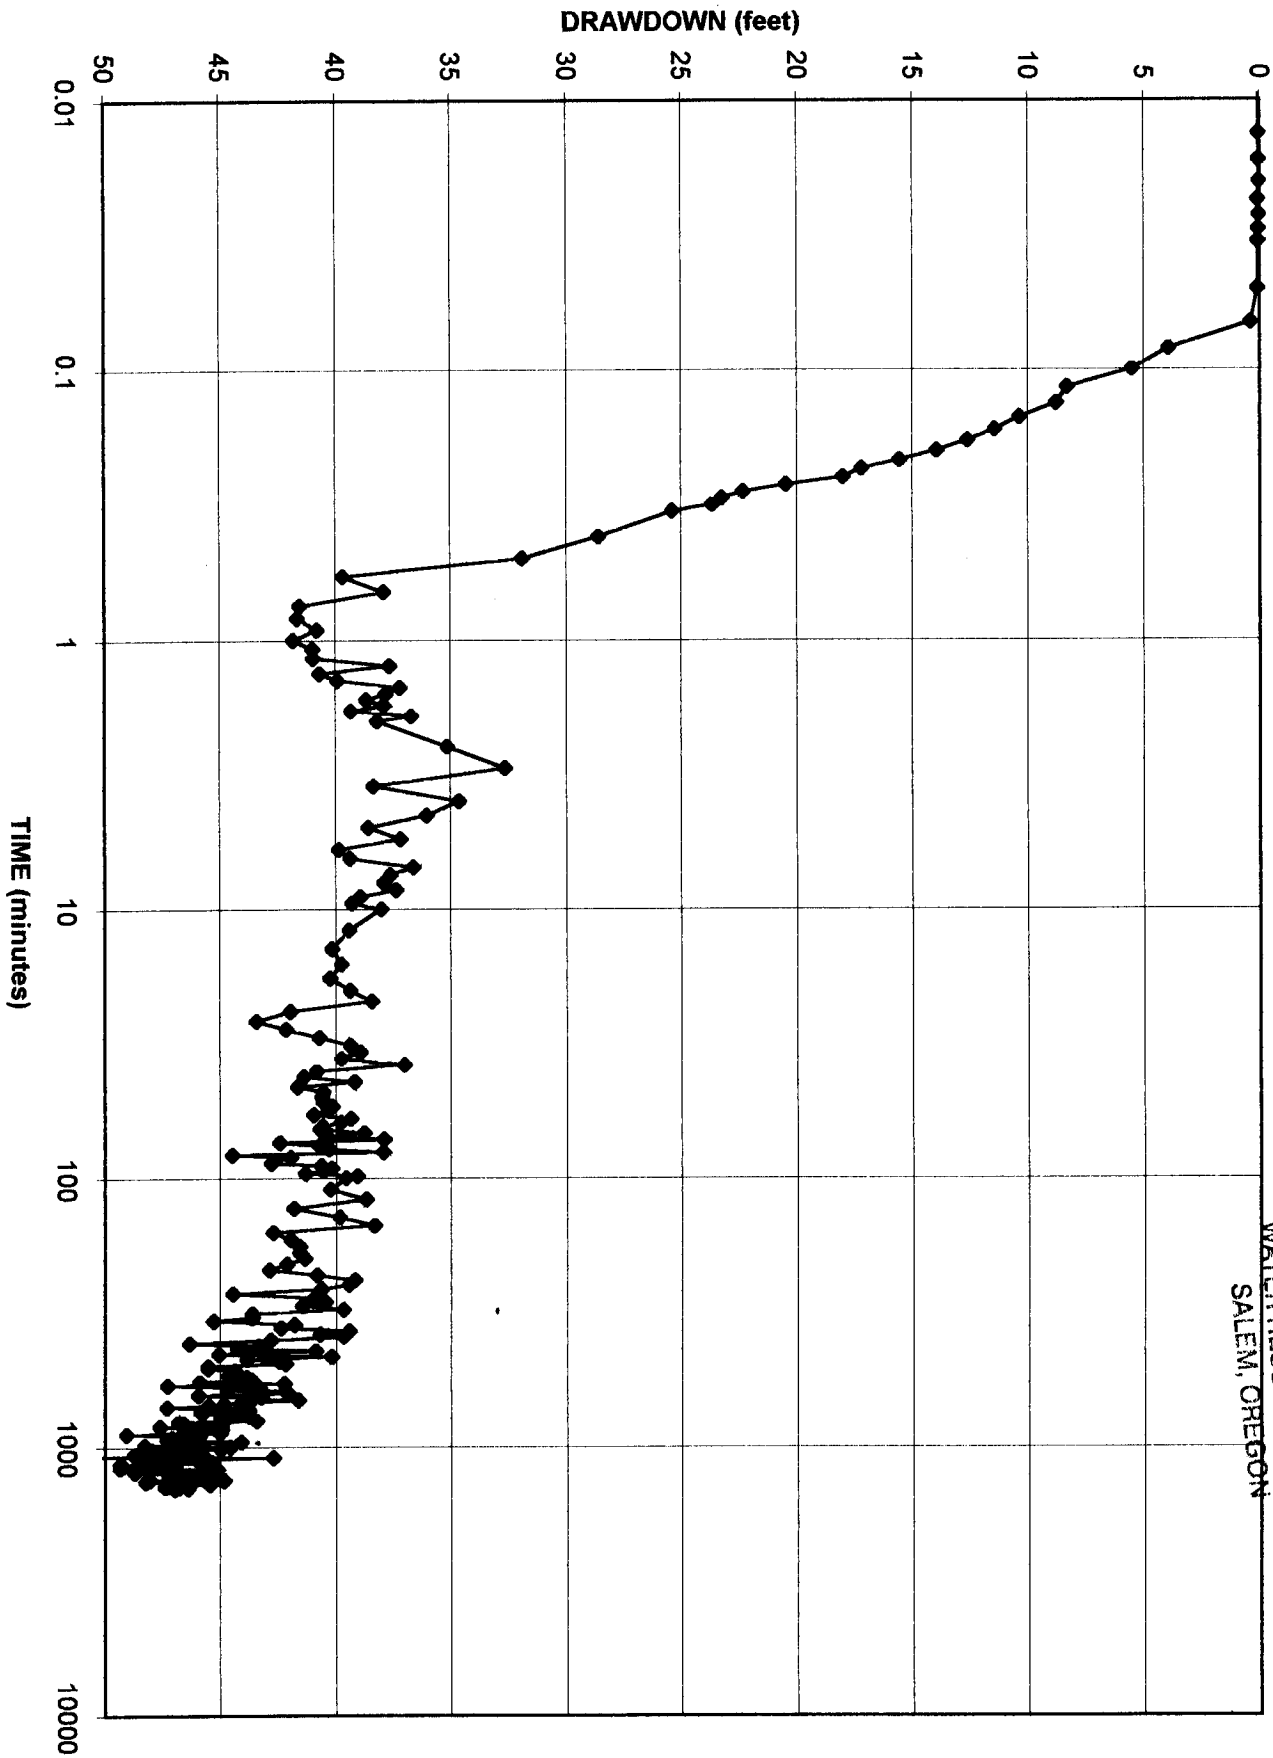

RECEIVED

SHERWOOD WELL NO. 6
1/31/97 - 1100 GPM Recovery

MAR - 4 1997

WATER RESOURCES DEPT.
SALEM, OREGON

