Oregon DEQ Division 33 Review Summary Sheet



Application Information

Applicant Name:	Brian and Duane LLC	Application Number:	S-89171	
Basin & Sub-basin:	Columbia River	Requested Water Amount:	4.9 CFS	
Nearest Surface	Columbia River	Nearest Receiving	Columbia River	
Water:	Columbia River	Waterbody:	Columbia River	
Proposed Use:	Irrigation	Requested Period of Use:	October 1 to April 14	

Division 33 Geographic Are	a
----------------------------	---

☐ Lower Columbia ☐ Upper Columbia ☐ Statewide			
Upper and Lower Columbia Basins only : Based upon the review completed below, does the proposed use comply with existing state and federal water quality standards or may conditions be applied to bring the use into compliance?	□No	□ Yes	⊠ Insufficient data
Statewide: Will the proposed use result in water quality impacts that will cause either "loss" or "net loss" of essential habitat of sensitive threatened or endangered (ST&E) fish species? (Note: the presence of ST&E fish species is determined by Oregon Department of Fish and Wildlife.)	□No	☐ Yes	☐ Insufficient data

Recommended Pre-Proposed Final Order Actions


Mitigation Obligation	No □ Yes	
Prior to issuance of a Pro	posed Final Order, the appli	cant shall submit a mitigation proposal that is of no less
volume and rate than the	e permitted use. The propos	al shall include water that is sourced upstream of the point
of diversion or appropria	tion, or the uppermost poin	t on the stream at which the potential for surface water
interference occurs. If a s	surface water right is used for	or mitigation, it shall be transferred instream for the [month
- month] time period an	d of similar water quality. T	ne applicant should contact their OWRD caseworker to
discuss flow mitigation o	ptions. Flow mitigation is sit	e-specific, therefore DEQ recommends written approval of
the mitigation proposal b	by DEQ prior to issuance of a	proposed final order.

Recommended Permit Conditions

- 1. Before water use may begin under this permit, the permittee shall install a continuous water temperature measurement device at the proposed pump location, and not withdraw at any time when the 7-day average is above 20C. The permittee shall maintain the device in good working order.
- 2. Water Quality: All water use under this permit shall comply with state and federal water quality laws. The permittee shall not violate any state and federal water quality standards, shall not cause pollution of any waters of the state, and shall not place or cause to be placed any wastes in a location where such wastes are likely to escape or be carried into the waters of the state by any means. The use may be restricted if the quality of source stream or downstream waters decrease to the point that those waters no longer meet existing state or federal water quality standards. Permittee is responsible for obtaining any necessary state and federal permits.
- **3. Herbicide Applications:** When herbicide application is within three feet of water, the permittee is responsible for ensuring that herbicide application laws are met, and that they obtain from DEQ any necessary pesticide application permits, including the 2300-A Pesticide General Permit or the 2000-J NPDES General Permit. Polluted return flows are not allowed to enter waters of the state per ORS 468B.025(1).
- **4. Agricultural Water Quality Management Area Rules**: The permittee shall comply with basin-specific Agricultural Water Quality Management Area Rules described in Oregon Administrative Rule Chapter 603-095. The permittee shall protect riparian areas, including through irrigation practices and the management of any livestock, allowing site capable vegetation to establish and grow along streams, while providing the

following functions: shade (on perennial and some intermittent streams), bank stability, and infiltration or filtration of overland runoff.

- 5. Flow Restrictor: The permittee shall install a flow control valve on the diversion system to limit use to the permitted rate. The valve shall be in place, functional, and verified by the Certified Water Rights Examiner before a certificate is issued. The valve or a suitable replacement shall remain in place for the life of the water right.
- **6. Limit Period of Use:** In order to not further impair the Columbia River 303(d) listing for temperature, the seven-day average maximum may not exceed 20 degrees C. Temperatures decline through the late summer and fall and were generally lower than 20 deg. C by October 1 in the fall. There would be no delay in diversion if the water temperature was below the criterion on October 1.

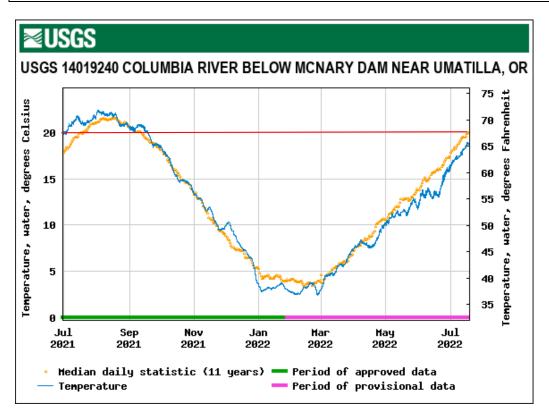

Seasonal Limitations

Reason for limitation	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
TMDL: Critical period												
WAB: 20% flow threshold exceeded												
Other:												

Additional Reviewer comments ☐ No ☒ Yes

[Use this space to describe any of the following: reasoning to substantiate permit conditions; examples of additional information that may allow or disallow the use; and why any variations to the standard Division 33 review process were necessary. Designate conditions related to Division 310 with an asterisk.]

There are water quality impairments in the reach (Lake Wallula [upstream from McNary, OR]) at the POD for temperature and dissolved gas. These impairments are listed in the 2018/2020 DEQ integrated report (303(d) listings). Stream temperatures that exceed the standards (20 degrees C) can disrupt the life cycle of a sensitive, threatened, or endangered fish species and may even cause death. In waterbodies where temperatures exceed standards, additional water withdrawals will reduce the stream's heat capacity and cause greater fluctuation in

thr diss this end	daytime and nighttime stream temperatures. This will result in the diminution of habitat of sensitive, threatened, or endangered fish species. In addition, the Columbia River is already known to be impaired for total dissolved gas. An increase in the rate or volume of release will increase the total dissolved gas concentration in this waterbody and result in the diminution of water quality for the habitat of sensitive, threatened, or endangered fish species.							
dise dat wit stre dro ma div pla	charge as it enters Oregon a, it is difficult to assess pound have also may negatively a cam temperatures have displayed below the 20 degrees Consimum temperatures exception until the 7 day averaged at the POD for continuous contin	and the many large tributa otential impacts of individual affect surface water quantit pped below 20 degrees C is line as early as the beginning eeds the water quality criterage drops below 20 degreeuous temperature logging.						
wa	s discussed?]		eragency consultation. Who was contacted and what					
DE	Q review prepared by:	Cole Hendrickson	Date complete: 6/29/2022					
Ant	quality to prevent unnece pollution, and to protect,	essary further degradation f maintain, and enhance exis	340-041-0004(1)) is to guide decisions that affect water from new or increased point and nonpoint sources of isting surface water quality to ensure the full protection of n Policy allows exemptions and conditions for new or					
1.	has determined provides	se a temporary use in respo a net ecological benefit, or e, for which the applicant h	onse to an emergency, a restoration activity that the DEQ r a temporary (lasting less than six months) use to protect has demonstrated that they will minimize adverse effects No Yes					
	• •	val of the application and ic pecies. You may skip to Que	dentify conditions necessary to protect water quality for estion 7.					
2.	Outstanding Resource W Does the applicant propos for ST&E fish species?		om an Outstanding Resource Water with critical habitat					
	If yes, then prior to permi question 7.	t issuance, the applicant m	nust provide suitable flow mitigation. You may skip to					
3.		-	o a water quality limited water body? Note: limit that diminished flow can affect (temperature, dissolved No Yes					

Integrated Report 303(d) List Summary Table

Assessment Unit Name	Assessment Unit Description	Parameter	Status*	Beneficial Uses
Columbia River	Lake Wallula (upstream from McNary, OR)	Temperature- Year Round	5	Fishing; Private Domestic Water Supply; Public Domestic Water Supply; Fish and Aquatic Life
		Total Dissolved gas	4A	Fishing; Private Domestic Water Supply; Public Domestic Water Supply; Fish and Aquatic Life

^{*}Integrated Report Category

Category 4 - Data indicate that at least one designated use is not supported, but a TMDL is not needed to address the pollutant

Category 4A - Clean-up plans (also called TMDLs) that will result in the waterbody meeting water quality standards and supporting its beneficial uses have been approved

Category 4B - Other pollution control requirements are expected to address pollutant of concern and will result in attainment of water quality standards

Category 4C - The impairment is caused by pollution, not a pollutant. For example, flow, or lack of flow, are not considered pollutants, but may be affecting the waterbody's beneficial uses

Category 5 - Data indicate a designated use is not supported or a water quality standard is not attained and a TMDL is needed. This category constitutes the Section 303(d) list that EPA will approve or disapprove under the Clean Water Act

Analysis: [If the answer to question 3 is yes, then describe how the use does or does not comply with existing state and federal water quality standards, and how the use may affect ST&E fish species habitat.]

Temperature

The Columbia River does not meet Oregon's stream temperature standards. Oregon's stream temperature standards are based on the life cycle needs of salmonids and other resident fish and aquatic life. Water temperatures are influenced by solar radiation, stream shade, ambient air temperatures, channel morphology, groundwater inflows, and stream velocity, volume, and flow. Surface water temperatures may also be warmed by anthropogenic activities such as discharging heated water, changing stream width or depth, reducing stream shading, and water withdrawals. Stream temperatures that exceed the standards can disrupt the life cycle of a sensitive, threatened, or endangered fish species and may even cause death. In waterbodies where temperatures exceed standards, additional summertime water withdrawals will reduce the stream's heat capacity and cause greater fluctuation in daytime and nighttime stream temperatures. This will result in the diminution of habitat of sensitive, threatened, or endangered fish species.

Total Dissolved Gas

When water is released from a dam it drags air bubbles into the water below. The air bubbles dissolve and increase the concentration of atmospheric gases in the water. When a waterbody is 100% saturated, the concentration of dissolved gases in the waterbody is in equilibrium with atmospheric pressure. When the concentration of dissolved gases increases to above 100% the waterbody is supersaturated. At saturation levels exceeding 110%, fish and aquatic life become susceptible to gas bubble disease. Gas bubble disease occurs when the dissolved gases come out of solution inside an organism's blood stream, damaging tissues or causing death. The Columbia River is already known to be impaired for total dissolved gas. An increase in the rate or volume of release will increase the total dissolved gas concentration in this waterbody and result in the diminution of water quality for the habitat of sensitive, threatened, or endangered fish species.

Recommended Conditions: [Consider if water quality can be protected by limiting the rate and quantity of water used, period of use, or by including other permit conditions.]

Water Quality

4. Total Maximum Daily Load Summary

	Are there	e TMDLs esta	blished fo	or parame	eters identified	as being af	ffected by f	low modification	on? ⊠ No	□ Yes
	the use o	=	not comp	oly with e	location, and if xisting state an			_		
	No TMD	L								
			-		water quality cange of the cang	•	•	niting the rate a	and quantit	y of
	Not Av	ailable								
W	/atershed ID	Exceedance Level	Month	Natural Stream Flow	Consumptive Use	Expected Stream Flow	Reserved Stream Flows	Instream Requirement	Net Water Available	Percent of Flow
		 								
<u> </u>	Monthly flow in	Cubic Feet per Second (CFS). Annual flow	w in Acre Feet (AF	F)). Highlight months that ex	xceed 20% of percer	nt of flow.			<u> </u>
6.	Based on standard	n responses to Is or can com	o questio pliance w ow mitiga	ns 3, 4, ar vith state	nte and Federal nd 5, is the use and federal wa or by imposing	in complia ter quality	nce with sta standards l	ate and federal	•	•
	Recomm period of		_	water qua	ality can be pro	tected by r	modifying o	r limiting the a	mount dive	erted,

water temperature measurement device at the proposed pump location. The permittee shall maintain the

device in good working order.

7.	Compliance with other State and Federal Water Quality Standards ORS 468B.025 prohibits pollution of waters of the state. Are there additional water quality impairments that would result from this proposed used by degrading surface water or groundwater quality?						
	□ No ⊠ Yes						
_	If water quality can be protected by applying permit conditions, then select all appropriate conditions from the standardized menu of conditions.						
	Recommended conditions: [List conditions]						
	Herbicide Applications, Agricultural Water Quality Management Area Rule						

PRE-PROPOSED FINAL ORDER ACTIONS

DEQ recommends that the applicant provide suitable replacement water as mitigation for anticipated impacts to water quality and more specifically the habitat of sensitive, threatened, and endangered fish species. Additional mitigation may be required from other Interagency Review Team members (for example: OWRD may require mitigation for periods when water is not available). Surface water flow mitigation is unlikely to provide the same benefit that groundwater can provide to gaining stream reaches. However, if groundwater mitigation is unavailable within the same aquifer, surface water mitigation may provide suitable mitigation.

Flow Mitigation Obligation:

Prior to issuance of a Proposed Final Order, the applicant shall submit a mitigation proposal that is of no less volume and rate than the permitted use. The proposal shall include water that is sourced upstream of the point of diversion or appropriation, or the uppermost point on the stream at which the potential for surface water interference occurs. If a surface water right is used for mitigation, it shall be instream for the *month - month time* period and of similar water quality. The applicant should contact their OWRD caseworker to discuss flow mitigation options.

Riparian: If the riparian area is disturbed in the process of developing, modifying or repairing a point of diversion under this water use permit, the permittee shall be responsible for restoration and enhancement of such riparian area in accordance with the Oregon Department of Fish and Wildlife's Habitat Mitigation Policy described in Oregon Administrative Rule OAR Chapter 635-415. Prior to development, modification or repairs at the point of diversion, the permittee shall submit, to the Oregon Water Resources Department, either a Riparian Mitigation Plan approved in writing by Oregon Department of Fish and Wildlife (ODFW) or a written declaration from ODFW that riparian mitigation is not necessary. The permittee shall maintain the riparian area for the life of the permit and subsequent certificate per the approved Riparian Mitigation Plan. The permittee is hereby directed to contact the local Oregon Department of Fish and Wildlife Fish Biologist prior to development of the point of diversion.

Water Storage Construction: The applicant shall locate the reservoir outside of the stream's natural channel. identify waterbody and set back to prevent stream capture and justification for distance selected.

(Note to reviewer: The 1200C permit requires a 50-foot setback, which is cited from the National General Construction Permit OAR-660-023-0090(5). Requiring the storage reservoir to be outside of the mapped 100 year floodway may also be a protective buffer.)

Construction Activities: 1200-C NPDES Stormwater Construction permit coverage is required from DEQ or Agent for construction activities (clearing, grading, excavation, grubbing, stumping, demolition, staging, stockpiling and other land disturbing activities) that will disturb one or more acres, or that will disturb less than one acre of land but is part of a common plan of development or sale that will ultimately disturb one or more acres of land and have the potential to discharge to surface waters or to a conveyance system that leads to surface waters of the state.

In-Water or Riparian Construction: For in-water or riparian construction, permittee may be required to obtain additional permits from the Oregon Department of State Lands, the U.S. Army Corps of Engineers, and the DEQ Section 401 certification program prior to construction. The applicant must contact these agencies to confirm requirements.

Herbicide Applications: When herbicide application is within three feet of water, the permittee is responsible for ensuring that herbicide application laws are met, and that they obtain from DEQ any necessary pesticide application permits, including the 2300-A Pesticide General Permit or the 2000-J NPDES General Permit. Polluted return flows are not allowed to enter waters of the state per ORS 468B.025(1).

STANDARIZED MENU OF CONDITIONS

Water Quality: All water use under this permit shall comply with state and federal water quality laws. The permittee shall not violate any state and federal water quality standards, shall not cause pollution of any waters of the state, and shall not place or cause to be placed any wastes in a location where such wastes are likely to escape or be carried into the waters of the state by any means. The use may be restricted if the quality of source stream or downstream waters decrease to the point that those waters no longer meet existing state or federal water quality standards. Permittee is responsible for obtaining any necessary state and federal permits.

Agricultural Water Quality Management Area Rules: The permittee shall comply with basin-specific Agricultural Water Quality Management Area Rules described in Oregon Administrative Rule Chapter 603-095. The permittee shall protect riparian areas, including through irrigation practices and the management of any livestock, allowing site capable vegetation to establish and grow along streams, while providing the following functions: shade (on perennial and some intermittent streams), bank stability, and infiltration or filtration of overland runoff.

Flow Restrictor: The permittee shall install a flow control valve on the diversion system to limit use to the permitted rate. The valve shall be in place, functional, and verified by the Certified Water Rights Examiner before a certificate is issued. The valve or a suitable replacement shall remain in place for the life of the water right.

Limit Rate: Water withdrawal shall be limited to *Enter CFS or AF for the defined period, or a month by month rate or volume*.

Limit Period of Use: Water use shall be limited to the period: start date through end date.

(Note to reviewer: Do not split the irrigation season. Require mitigation if water is not available during the requested time period.)

Limit Diversion: The permittee shall not divert water under this water use permit unless streamflow in the waterbody name is at or above *CFS* cubic foot per second, as determined at Gaging Station ID

Off-Channel Stored Water Releases: The permittee shall not release polluted water from this off-channel reservoir into waters of the state except when the release is directed by the State Engineer to prevent dam failure.

On-Channel Reservoir: The permittee shall design and operate the water storage facility such that all waters within and below the reservoir meet water quality criteria. The permittee shall develop a reservoir operations plan that details how water quality criteria and standards will be met. A Certified Water Rights Examiner shall verify that the reservoir operations are consistent with the plan before a certificate is issued. The reservoir operator shall maintain a copy of the plan and make it available for review upon request.

Restrict Reservoir Release: To prevent pollution downstream, the permittee shall not release water from the reservoir when the flow at Gaging Station ID (gage name) is below the Mean Daily Discharge of *CFS* (discharge which was equaled or exceeded for 90% percent of the time) except when the release is directed by the State Engineer to prevent dam failure.

Live Flow: Once the allocated volume has been stored, permittee shall pass all live flow downstream at a rate equal to inflow, using methods that protect instream water quality.

Lining: The permittee shall line the reservoir with *include material or allowable infiltration rate* to minimize seepage and protect groundwater quality per Oregon Administrative Rule 340-040. The liner is to be in place,

inspected, and approved by the Certified Water Rights examiner prior to storage of water.* If the liner fails, the water user shall replace it within one calendar year. **Site-Specific Condition**: The permittee shall

^{*} OAR 690-410-0010(2)(a), OAR 690-310-0120, OAR 690-310-0140

Appendix: General Overview, Instructions for Water Availability Analysis, and Process Flow Chart

General Overview

The purpose of OAR Chapter 690, Division 33 is to aid the Oregon Water Resources Department (OWRD) in determining whether a proposed use will impair or be detrimental to the public interest with regard to listed sensitive, threatened, or endangered (ST&E) fish species. Oregon's stream temperature, dissolved oxygen (DO), pH and several other water quality standards are based on the life cycle needs of salmonids and other resident fish and aquatic life. Exceeding the standards can disrupt the life cycle of a ST&E fish species and may cause death. In addition, OWRD must consider water quality impacts as part of a public interest review, OAR 690-310-0120. Water quality impacts and conditions unrelated to ST&E species should be noted as "Division 310" in the recommendations to OWRD. The DEQ's Water Right Application Review Procedures document contains a full description of the review process.

The two main categories of Division 33 reviews are based on the geographic distribution of ST&E fish species:

- o **For Proposed Uses in the Columbia River Basin,** reviews must determine whether a proposed use complies with existing state and federal water quality standards. Upper Columbia applications specifically require applicants to provide evidence that the proposed use complies with existing state and federal water quality standards. <u>Geographic scope</u>: Columbia River Basin (includes all waters that ultimately drain into the Columbia River).
- o **For Proposed Uses Statewide,** review is conducted under the "Statewide review" procedure. Statewide reviews must determine whether a proposed use may affect ST&E fish species habitat. The statewide review procedure is intended to identify permit conditions that can prevent the "loss" or "net loss" of essential habitat of ST&E fish species. When permit conditions cannot be identified that meet this standard, then the DEQ recommends denial of the permit. <u>Geographic scope</u>: all areas outside the Columbia River Basin where OWRD determines ST&E fish species are present.

Instructions for Populating the Water Availability Summary Table using data from OWRD's WAB (Section 5)

- Open OWRD's Water Availability Reporting System.
- Search for the water availability basin of interest. Select 50% exceedance. The 50% exceedance stream flow is the stream flow that occurs at least half of the time.
- The water availability analysis will display a nested list of watersheds that contain the POD. Select the highest nesting order WAB that contains the POD.
- Download to an Excel spreadsheet. Percent of flow is calculated using this equation:

$$Percent \ of \ Flow = \frac{Consumptive \ Use}{Natural \ Stream \ Flow}*100$$

You may choose to add the proposed rate (or storage amount) to the consumptive use.

Instructions for Water Availability Analysis

To complete Section 6, review and consider the cumulative impact of consumptive withdrawals using the OWRD WAB. All water withdrawals and the following factors should be considered when conducting a water availability analysis.

- Instream Flow: Consider the percent of natural flow removed from the stream in each month (see right-most column in Water Availability and Cumulative Impacts Summary Table). Based on best professional judgment, evaluate if the cumulative withdrawal is likely to cause impairment to aquatic life or water quality. Water quality standards are established to protect aquatic life. In scientific literature, researchers have identified ecological harm occurring when flows are reduced by >6-35% of daily flow¹. Consider the seasonality of any listings and season of withdrawal to determine impact for each month of the year.
- Antidegradation: Rule 340-041-0004 applies: withdrawals cannot cumulatively increase a waterbody's temperature by more than 0.5 degrees Fahrenheit or cause a 0.1 mg/l decrease in dissolved oxygen from the upstream end of a stream reach to the downstream end of the reach so long as it has no adverse effects on threatened and endangered species. See OAR 340-041-0004(3)-(5) for a description in rule of activities that do not result in lowering of water quality.
- Flow modification: Consider if cumulative withdrawals are contributing to flow modification and a likely limiting factor in the waterbody at certain times of the year. Temperature and dissolved oxygen are flow-related parameters. When streamflow is reduced, assimilative capacity is reduced. As a waterbody heats up, dissolved oxygen concentrations decline. Reduced stream flows (including groundwater inputs to streamflow), exacerbate temperature and/or dissolved oxygen impairments.
- Temperature: Increases in temperature or a reduction in dissolved oxygen adversely impacts ST&E fish. Fish
 require different temperature and concentrations of dissolved oxygen based on species and life history stage.
 Oregon's temperature and dissolved oxygen limits are based on the most sensitive species and the life history
 stage of those species at the location and season of concern. Additional heat or reduction in dissolved oxygen
 concentrations will further impact these species habitat. Reduced flows can also increase the concentrations
 of phosphorous, bacteria, pesticides and metals.

Instructions for Calculating "Limit Diversion" Rate

This condition is selected to limit withdrawals once the cumulative withdrawals in the watershed have exceeded the protective threshold of 20 percent and/or the ISWR is not fully protective of aquatic life. A different value can be selected, but the reviewer should state why a particular percent was selected.

"Natural stream flow" is obtained from OWRD's Water Availability Reporting System. The condition is applied on a monthly timeframe based on OWRD's data.

"Natural stream flow" – (percent of flow * "natural stream flow") = Expected Stream Flow

The applicant would have to stop using when instream flows drop below the Expected Stream Flow.

Example:

Natural stream flow for a particular month = 1200 CFS

1200 CFS - (.2 * 1200 CFS) = 960 CFS

¹ Richter BD, Davis MM, Apse C, Konrad C. 2011. *Short Communication, A Presumptive Standard For Environmental Flow Protection*. River Research and Applications. Published online in Wiley Online Library (wileyonlinelibrary.com), DOI: 10.002/rra.1551

DEQ Water Right Review Flow Chart

