

Oregon DEQ Division 33 Review Summary Sheet



Application Information

Applicant Name:	Port of Morrow	Application Number:	S-89855
Basin & Sub-basin:	Columbia / Lower Juniper Canyon, Umatilla	Requested Water Amount:	450 gpm
Nearest Surface Water:	Columbia River, West Extension Irrigation Canal	Nearest Receiving Waterbody:	Columbia River
Proposed Use:	Industrial Use	Requested Period of Use:	January 1 – December 31 annually

Division 33 Geographic Area

<input type="checkbox"/> Lower Columbia <input checked="" type="checkbox"/> Upper Columbia <input checked="" type="checkbox"/> Statewide	
Upper and Lower Columbia Basins only: Based upon the review completed below, does the proposed use comply with existing state and federal water quality standards or may conditions be applied to bring the use into compliance?	<input checked="" type="checkbox"/> No <input type="checkbox"/> Yes <input type="checkbox"/> Insufficient data
Statewide: Will the proposed use result in water quality impacts that will cause either “loss” or “net loss” of essential habitat of sensitive threatened or endangered (ST&E) fish species? (Note: the presence of ST&E fish species is determined by Oregon Department of Fish and Wildlife.)	<input type="checkbox"/> No <input checked="" type="checkbox"/> Yes <input type="checkbox"/> Insufficient data

Recommended Pre-Proposed Final Order Actions

1.
2.
3.
Mitigation Obligation <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes
Prior to issuance of a Proposed Final Order, the applicant shall submit a mitigation proposal that is of no less volume and rate than the permitted use. The proposal shall include water that is sourced upstream of the point of diversion or appropriation, or the uppermost point on the stream at which the potential for surface water interference occurs. If a surface water right is used for mitigation, it shall be transferred instream for the [month - month time period] time period and of similar water quality. The applicant should contact their OWRD caseworker to discuss flow mitigation options. Flow mitigation is site-specific, therefore DEQ recommends written approval of the mitigation proposal by DEQ prior to issuance of a proposed final order.

Recommended Permit Conditions

1. Water Quality: All water use under this permit shall comply with state and federal water quality laws. The permittee shall not violate any state and federal water quality standards, shall not cause pollution of any waters of the state, and shall not place or cause to be placed any wastes in a location where such wastes are likely to escape or be carried into the waters of the state by any means. The use may be restricted if the quality of source stream or downstream waters decrease to the point that those waters no longer meet existing state or federal water quality standards. Permittee is responsible for obtaining any necessary state and federal permits.
2. Limit Period of Use: Water use shall be limited to the period: USE NOT ALLOWABLE
3. Flow Restrictor: The permittee shall install a flow control valve on the diversion system to limit use to the permitted rate. The valve shall be in place, functional, and verified by the Certified Water Rights Examiner before a certificate is issued. The valve or a suitable replacement shall remain in place for the life of the water right.

4. In-Water or Riparian Construction: For in-water or riparian construction, permittee may be required to obtain additional permits from the Oregon Department of State Lands, the U.S. Army Corps of Engineers, and the DEQ Section 401 certification program prior to construction. The applicant must contact these agencies to confirm requirements.

Seasonal Limitations

Reason for limitation	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
TMDL: Critical period (Umatilla)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
TMDL: Critical period (Columbia)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
WAB: 20% flow threshold exceeded: Juniper Canal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
WAB: 20% flow threshold exceeded: Umatilla River	<input checked="" type="checkbox"/>											
Other: Statewide Critical Warm Period	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
Other: Umatilla Instream Flow Requirements Likely Not Met	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Additional Reviewer comments No Yes

[Use this space to describe any of the following: reasoning to substantiate permit conditions; examples of additional information that may allow or disallow the use; and why any variations to the standard Division 33 review process were necessary. Designate conditions related to Division 310 with an asterisk.]

To ensure the protection of water quality, the proposed use should not be allowable as water is not available for further appropriation.

Surface flows, such as runoff are contributing flows to the Columbia River basin, whether they discharge to the Columbia via surface water, or are hydraulically linked via groundwater.

The proposed use, based on the description from the applicant, is for wastewater. Wastewater means “water that has been diverted under an authorized water right after it is beyond the control of the owner or that right but has not yet returned to the channel of a natural stream. In an irrigation district, the wastewater of an individual user **is not subject to appropriation until it leaves the boundaries of the district.** Wastewater abandoned to the channel of a natural stream becomes a part of that stream and is subject to appropriation.” (OAR 690-300-0010).

Based on the map image below, the proposed wastewater is still within the boundaries of the West Extension Irrigation District


West Extension ID + POD



2/27/2025, 11:58:38 AM

Irrigation Districts

■ WEST EXTENSION



ArcGIS Web AppBuilder
Geopix Services Ltd., Maxar | Oregon Statewide Imagery Program (OSIP) - Oregon Imagery Framework Implementation Team | Oregon Statewide Imagery Program (OSIP) - Oregon Imagery Framework Implementation Team | Umatilla County GIS |

The POD is roughly .71 miles from the Columbia River

Due to the allocation of water in the Umatilla, where the initial diversion is made to get water to the proposed POD, and the nearby Juniper Canal, water is not available for appropriation year-round from the Umatilla and May through November from Juniper Canal. To protect water quality, the most conservative approach must be taken. Thus, water is not available for the proposed use.

Due to the TMDL critical periods, water quality concerns, and lack of water availability, the use should not be allowed.

It is left up to the Department to determine if the use of wastewater for this right is allowable based on its location within the Irrigation District and the proposed use.

Interagency consultation: [Describe any substantial interagency consultation. Who was contacted and what was discussed?] Amanda Mather

DEQ review prepared by: Cole Hendrickson

Date complete: 2/3/2026

Antidegradation Policy:

The purpose of DEQ's Antidegradation Policy (OAR 340-041-0004(1)) is to guide decisions that affect water quality to prevent unnecessary further degradation from new or increased point and nonpoint sources of

pollution, and to protect, maintain, and enhance existing surface water quality to ensure the full protection of all existing beneficial uses. Oregon’s Antidegradation Policy allows exemptions and conditions for new or increased water use.

1. Temporary Use or Net Benefit

Does the applicant propose a temporary use in response to an emergency, a restoration activity that the DEQ has determined provides a net ecological benefit, or a temporary (lasting less than six months) use to protect human health and welfare, for which the applicant has demonstrated that they will minimize adverse effects to threatened and endangered species? No Yes

If yes, recommend approval of the application and identify conditions necessary to protect water quality for the habitat of ST&E fish species. You may skip to Question 7.

2. Outstanding Resource Water

Does the applicant propose withdrawing directly from an **Outstanding Resource Water** with critical habitat for ST&E fish species? No Yes

If yes, then prior to permit issuance, the applicant must provide suitable flow mitigation. You may skip to question 7.

3. Water Quality Limited

Is this source **Water Quality Limited** or a tributary to a water quality limited water body? Note: limit downstream review to 6th field HUC for parameters that diminished flow can affect (temperature, dissolved oxygen, pH, etc.). No Yes

Integrated Report 303(d) List Summary Table

Assessment Unit Name	Assessment Unit Description	Parameter	Status*	Beneficial Uses
Columbia River	Lake Umatilla (upstream from Crow Butte)	Temperature (Year-Round)	Category 4A	Fish and Aquatic Life
		Dissolved Gas	Category 4A	Fish and Aquatic Life
Umatilla River	Stanfield Drain to confluence with Columbia River	Flow Modification	Category 4C	Fish and Aquatic Life
		Temperature (Year-Round)	Category 4A	Fish and Aquatic Life
		Temperature (Spawning)	Category 4A	Fish and Aquatic Life

*Integrated Report Category
Category 4 - Data indicate that at least one designated use is not supported, but a TMDL is not needed to address the pollutant
Category 4A - Clean-up plans (also called TMDLs) that will result in the waterbody meeting water quality standards and supporting its beneficial uses have been approved
Category 4B - Other pollution control requirements are expected to address pollutant of concern and will result in attainment of water quality standards
Category 4C - The impairment is caused by pollution, not a pollutant. For example, flow, or lack of flow, are not considered pollutants, but may be affecting the waterbody’s beneficial uses
Category 5 - Data indicate a designated use is not supported or a water quality standard is not attained and a TMDL is needed. This category constitutes the Section 303(d) list that EPA will approve or disapprove under the Clean Water Act

Analysis: [If the answer to question 3 is yes, then describe how the use does or does not comply with existing state and federal water quality standards, and how the use may affect ST&E fish species habitat.]

Flows in the West Extension Irrigation District Canal, and subsequent canals come from the Umatilla River, roughly 3.45 miles upstream from the confluence with the Columbia.

Temperature (Columbia)

Increases in temperature adversely impact sensitive, threatened, and endangered fish. Fish require different temperature based on species and life history stage. Oregon's temperature limits are based on the most sensitive species and the life history stage of those species at the location and season of concern. The Columbia River does not meet Oregon's year-round stream temperature standards. Generally, water temperatures increase as flow decreases. Therefore, reducing flow in waterbodies that are connected to downstream temperature-impaired waterbodies, such as The Columbia River, could result in higher stream temperatures and stressed conditions for aquatic life, particularly during the summer months when stream flow is lowest. The critical warm period when stream conditions are most likely to exceed the year-round temperature standards is July 1 – September 30.

Temperature (Umatilla)

Increases in temperature adversely impact sensitive, threatened, and endangered fish. Fish require different temperature based on species and life history stage. Oregon's temperature limits are based on the most sensitive species and the life history stage of those species at the location and season of concern. The Umatilla River does not meet Oregon's year-round and spawning stream temperature standards. Generally, water temperatures increase as flow decreases. Therefore, reducing flow in waterbodies that are connected to downstream temperature-impaired waterbodies, such as The Umatilla River, could result in higher stream temperatures and stressed conditions for aquatic life, particularly during the summer months when stream flow is lowest. The critical warm period when stream conditions are most likely to exceed the year-round temperature standards is July 1 – September 30.

Total Dissolved Gas

When water is released from a dam it drags air bubbles into the water below. The air bubbles dissolve and increase the concentration of atmospheric gases in the water. When a waterbody is 100% saturated, the concentration of dissolved gases in the waterbody is in equilibrium with atmospheric pressure. When the concentration of dissolved gases increases to above 100% the waterbody is supersaturated. At saturation levels exceeding 110%, fish and aquatic life become susceptible to gas bubble disease. Gas bubble disease occurs when the dissolved gases come out of solution inside an organism's blood stream, damaging tissues or causing death. The Columbia River is already known to be impaired for total dissolved gas. An increase in the rate or volume of release will increase the total dissolved gas concentration in this waterbody and result in the diminution of water quality for the habitat of sensitive, threatened, or endangered fish species.

Flow Modification

Fish and aquatic life need variable stream flows to trigger life stages and migration events. Some triggers are dependent on a change in flow, some triggers are dependent on a change in temperature. Dams and diversions alter the volume, timing, and temperature of flows. This prevents fish and aquatic life from accessing habitat or changing life stages at the appropriate time. Dams can also increase water clarity which promotes algal growth. Dams and diversions can prevent fish passage, which fragments river systems, isolates previously continuous populations, and prevents the migrations of sensitive, threatened, or endangered fish species.

Recommended Conditions: [Consider if water quality can be protected by limiting the rate and quantity of water used, period of use, or by including other permit conditions.]

Water Quality, Limit Period of Use

4. Total Maximum Daily Load Summary

Are there TMDLs established for parameters identified as being affected by flow modification? No Yes

Analysis: [List TMDL, identify the load allocation, and if flow modification is a contributing factor. Describe how the use does or does not comply with existing state and federal water quality standards and how the use may affect ST&E fish species habitat.]

Umatilla River Basin TMDL

A TMDL was established in 2001 for temperature, pH, sedimentation, turbidity, aquatic weeds, and algae for the Umatilla Subbasin. Human-caused increases in solar radiation loading and warm water discharge to surface waters. The temperature standard applicable in the Umatilla River Basin specifies that "no measurable surface water temperature increase resulting from anthropogenic (human-induced) activities is allowed. Elevated summertime stream temperatures result from riparian vegetation disturbance, low summertime flow, and channel widening. The critical period in the Umatilla is from June to September, when the temperature exceeds the water quality standard. Increased summer temperatures promote aquatic weed and algae growth in the Umatilla, which can add stress to fish. Salmonids are sensitive to warm temperatures which can affect anadromous fish passage and salmonid fish spawning. Temperature-sensitive beneficial uses are anadromous fish passage, and salmonid fish spawning. Additionally, excess sediment and turbidity can impact the spawning, feeding, and social activities of aquatic animals.

Columbia River TMDL

In 2020, the U.S. Environmental Protection Agency (EPA) established a Total Maximum Daily Load (TMDL) for temperature in the Columbia and Lower Snake Rivers. The goal of the TMDL is to identify the maximum amount of a pollutant (in this case, heat) that the waterbody can receive and still meet applicable water quality standards. The TMDL covers the mainstem Columbia River from the Canadian border to the mouth at the Pacific Ocean, including Oregon’s entire portion of the river that forms the border with Washington (river miles 0 – 309). EPA’s TMDL analysis considered all known sources of temperature impairments. The TMDL divided the 0.3°C human use allowance into three equal 0.1°C allocations to permitted National Pollutant Discharge Elimination System (NPDES) point sources; nonpoint source impacts dam impacts; and inflows from the largest 23 tributaries. EPA found that climate change (not given an allocation) and nonpoint source dam impacts are the dominant sources of impairment. The water quality criteria at river mile 269 (Boardman) is 20 degrees C 7-DADM year-round.

Recommended Conditions: [Consider if water quality can be protected by limiting the rate and quantity of water used, period of use, or by including other permit conditions.]

Water Quality, Limit Period of Use

5. Cumulative Withdrawals Effects

Is it likely that the proposed activity, together with existing withdrawals in the OWRD’s Water Availability Basin (WAB), will lower water quality and impair aquatic life? No Yes

Water Availability and Cumulative Impacts Summary Table

Percent of natural flow = (consumptive use/natural stream flow)*100. See Appendix for additional instructions.

JUNIPER CAN > COLUMBIA RIVER – AT MOUTH

Watershed ID	Exceedance Level	Month	Natural Stream Flow	Consumptive Use	Expected Stream Flow	Reserved Stream Flows	Instream Requirement	Net Water Available	Percent of Flow
30710105	50	JAN	1.88	0.015	1.86	0	0	1.86	0.79787234
30710105	50	FEB	7.34	0.031	7.31	0	0	7.31	0.422343324

30710105	50	MAR	23.5	0.086	23.4	0	0	23.4	0.365957447
30710105	50	APR	2.05	0.076	1.97	0	0	1.97	3.707317073
30710105	50	MAY	0.3	0.11	0.19	0	0	0.19	36.66666667
30710105	50	JUN	0.08	0.13	-0.05	0	0	-0.05	162.5
30710105	50	JUL	0.03	0.15	-0.12	0	0	-0.12	500
30710105	50	AUG	0	0.13	-0.13	0	0	-0.13	> 100
30710105	50	SEP	0	0.09	-0.09	0	0	-0.09	> 100
30710105	50	OCT	0	0.01	-0.01	0	0	-0.01	> 100
30710105	50	NOV	0.03	0.01	0.02	0	0	0.02	33.33333333
30710105	50	DEC	0.65	0.012	0.638	0	0	0.638	1.846153846

Monthly flow in Cubic Feet per Second (CFS). Annual flow in Acre Feet (AF). Highlight months that exceed 20% of percent of flow.

UMATILLA R > COLUMBIA R - AT MOUTH

Watershed ID	Exceedance Level	Month	Natural Stream Flow	Consumptive Use	Expected Stream Flow	Reserved Stream Flows	Instream Requirement	Net Water Available	Percent of Flow
221	50	JAN	648	384	264	0	250	13.9	59.25926
221	50	FEB	1120	473	647	0	250	397	42.23214
221	50	MAR	1380	612	768	0	250	518	44.34783
221	50	APR	1540	860	680	0	250	430	55.84416
221	50	MAY	1020	1130	-114	0	250	-364	110.7843
221	50	JUN	323	793	-470	0	250	-720	245.5108
221	50	JUL	106	421	-315	0	120	-435	397.1698
221	50	AUG	65.7	314	-249	0	85	-334	477.93
221	50	SEP	74	238	-164	0	250	-414	321.6216
221	50	OCT	87.8	138	-50.3	0	300	-350	157.1754
221	50	NOV	173	188	-14.8	0	300	-315	108.6705
221	50	DEC	521	357	164	0	250	-86.3	68.52207

6. Flow Modification Compliance with State and Federal Water Quality Standards

Based on responses to questions 3, 4, and 5, is the use in compliance with state and federal water quality standards or can compliance with state and federal water quality standards be assured, and ST&E habitat loss prevented through flow mitigation and/or by imposing permit condition(s)?

- No Yes

Recommended Conditions: [If water quality can be protected by modifying or limiting the amount diverted, period of use, or other permit conditions, then select appropriate condition from the conditions list.]

Flow Restrictor

7. Compliance with other State and Federal Water Quality Standards

ORS 468B.025 prohibits pollution of waters of the state. Are there additional water quality impairments that would result from this proposed used by degrading surface water or groundwater quality?

- No Yes

If water quality can be protected by applying permit conditions, then select all appropriate conditions from the standardized menu of conditions.

Recommended conditions: [List conditions]

In-Water or Riparian Construction

PRE-PROPOSED FINAL ORDER ACTIONS

DEQ recommends that the applicant provide suitable replacement water as mitigation for anticipated impacts to water quality and more specifically the habitat of sensitive, threatened, and endangered fish species. Additional mitigation may be required from other Interagency Review Team members (for example: OWRD may require mitigation for periods when water is not available). Surface water flow mitigation is unlikely to provide the same benefit that groundwater can provide to gaining stream reaches. However, if groundwater mitigation is unavailable within the same aquifer, surface water mitigation may provide suitable mitigation.

Flow Mitigation Obligation:

Prior to issuance of a Proposed Final Order, the applicant shall submit a mitigation proposal that is of no less volume and rate than the permitted use. The proposal shall include water that is sourced upstream of the point of diversion or appropriation, or the uppermost point on the stream at which the potential for surface water interference occurs. If a surface water right is used for mitigation, it shall be instream for the *month - month time period* and of similar water quality. The applicant should contact their OWRD caseworker to discuss flow mitigation options.

Riparian: If the riparian area is disturbed in the process of developing, modifying or repairing a point of diversion under this water use permit, the permittee shall be responsible for restoration and enhancement of such riparian area in accordance with the Oregon Department of Fish and Wildlife's Habitat Mitigation Policy described in Oregon Administrative Rule OAR Chapter 635-415. Prior to development, modification or repairs at the point of diversion, the permittee shall submit, to the Oregon Water Resources Department, either a Riparian Mitigation Plan approved in writing by Oregon Department of Fish and Wildlife (ODFW) or a written declaration from ODFW that riparian mitigation is not necessary. The permittee shall maintain the riparian area for the life of the permit and subsequent certificate per the approved Riparian Mitigation Plan. The permittee is hereby directed to contact the local Oregon Department of Fish and Wildlife Fish Biologist prior to development of the point of diversion.

Water Storage Construction: The applicant shall locate the reservoir outside of the stream's natural channel. *Identify waterbody and set back to prevent stream capture and justification for distance selected.*

(Note to reviewer: The 1200C permit requires a 50-foot setback, which is cited from the National General Construction Permit OAR-660-023-0090(5). Requiring the storage reservoir to be outside of the mapped 100 year floodway may also be a protective buffer.)

Construction Activities: 1200-C NPDES Stormwater Construction permit coverage is required from DEQ or Agent for construction activities (clearing, grading, excavation, grubbing, stumping, demolition, staging, stockpiling and other land disturbing activities) that will disturb one or more acres, or that will disturb less than one acre of land but is part of a common plan of development or sale that will ultimately disturb one or more acres of land and have the potential to discharge to surface waters or to a conveyance system that leads to surface waters of the state.

In-Water or Riparian Construction: For in-water or riparian construction, permittee may be required to obtain additional permits from the Oregon Department of State Lands, the U.S. Army Corps of Engineers, and the DEQ Section 401 certification program prior to construction. The applicant must contact these agencies to confirm requirements.

Herbicide Applications: When herbicide application is within three feet of water, the permittee is responsible for ensuring that herbicide application laws are met, and that they obtain from DEQ any necessary pesticide application permits, including the 2300-A Pesticide General Permit or the 2000-J NPDES General Permit. Polluted return flows are not allowed to enter waters of the state per ORS 468B.025(1).

STANDARIZED MENU OF CONDITIONS

Water Quality: All water use under this permit shall comply with state and federal water quality laws. The permittee shall not violate any state and federal water quality standards, shall not cause pollution of any waters of the state, and shall not place or cause to be placed any wastes in a location where such wastes are likely to escape or be carried into the waters of the state by any means. The use may be restricted if the quality of source stream or downstream waters decrease to the point that those waters no longer meet existing state or federal water quality standards. Permittee is responsible for obtaining any necessary state and federal permits.

Agricultural Water Quality Management Area Rules: The permittee shall comply with basin-specific Agricultural Water Quality Management Area Rules described in Oregon Administrative Rule Chapter 603-095. The permittee shall protect riparian areas, including through irrigation practices and the management of any livestock, allowing site capable vegetation to establish and grow along streams, while providing the following functions: shade (on perennial and some intermittent streams), bank stability, and infiltration or filtration of overland runoff.

Flow Restrictor: The permittee shall install a flow control valve on the diversion system to limit use to the permitted rate. The valve shall be in place, functional, and verified by the Certified Water Rights Examiner before a certificate is issued. The valve or a suitable replacement shall remain in place for the life of the water right.

Limit Rate: Water withdrawal shall be limited to *Enter CFS or AF for the defined period, or a month by month rate or volume.*

Limit Period of Use: Water use shall be limited to the period: *start date through end date.*

(Note to reviewer: Do not split the irrigation season. Require mitigation if water is not available during the requested time period.)

Limit Diversion: The permittee shall not divert water under this water use permit unless streamflow in the *waterbody name* is at or above *CFS* cubic foot per second, as determined at Gaging Station ID _____.

Off-Channel Stored Water Releases: The permittee shall not release polluted water from this off-channel reservoir into waters of the state except when the release is directed by the State Engineer to prevent dam failure.

On-Channel Reservoir: The permittee shall design and operate the water storage facility such that all waters within and below the reservoir meet water quality criteria. The permittee shall develop a reservoir operations plan that details how water quality criteria and standards will be met. A Certified Water Rights Examiner shall verify that the reservoir operations are consistent with the plan before a certificate is issued. The reservoir operator shall maintain a copy of the plan and make it available for review upon request.

Restrict Reservoir Release: To prevent pollution downstream, the permittee shall not release water from the reservoir when the flow at Gaging Station ID _____ (*gage name*) is below the Mean Daily Discharge of *CFS* (discharge which was equaled or exceeded for 90% percent of the time) except when the release is directed by the State Engineer to prevent dam failure.

Live Flow: Once the allocated volume has been stored, permittee shall pass all live flow downstream at a rate equal to inflow, using methods that protect instream water quality.

Lining: The permittee shall line the reservoir with *include material or allowable infiltration rate* to minimize seepage and protect groundwater quality per Oregon Administrative Rule 340-040. The liner is to be in place,

inspected, and approved by the Certified Water Rights examiner prior to storage of water.* If the liner fails, the water user shall replace it within one calendar year.

Site-Specific Condition: The permittee shall

* OAR 690-410-0010(2)(a), OAR 690-310-0120, OAR 690-310-0140

Appendix: General Overview, Instructions for Water Availability Analysis, and Process Flow Chart

General Overview

The purpose of OAR Chapter 690, Division 33 is to aid the Oregon Water Resources Department (OWRD) in determining whether a proposed use will impair or be detrimental to the public interest with regard to listed sensitive, threatened, or endangered (ST&E) fish species. Oregon's stream temperature, dissolved oxygen (DO), pH and several other water quality standards are based on the life cycle needs of salmonids and other resident fish and aquatic life. Exceeding the standards can disrupt the life cycle of a ST&E fish species and may cause death. In addition, OWRD must consider water quality impacts as part of a public interest review, OAR 690-310-0120. Water quality impacts and conditions unrelated to ST&E species should be noted as "Division 310" in the recommendations to OWRD. The DEQ's Water Right Application Review Procedures document contains a full description of the review process.

The two main categories of Division 33 reviews are based on the geographic distribution of ST&E fish species:

- **For Proposed Uses in the Columbia River Basin**, reviews must determine whether a proposed use complies with existing state and federal water quality standards. Upper Columbia applications specifically require applicants to provide evidence that the proposed use complies with existing state and federal water quality standards. Geographic scope: Columbia River Basin (includes all waters that ultimately drain into the Columbia River).
- **For Proposed Uses Statewide**, review is conducted under the "Statewide review" procedure. Statewide reviews must determine whether a proposed use may affect ST&E fish species habitat. The statewide review procedure is intended to identify permit conditions that can prevent the "loss" or "net loss" of essential habitat of ST&E fish species. When permit conditions cannot be identified that meet this standard, then the DEQ recommends denial of the permit. Geographic scope: all areas outside the Columbia River Basin where OWRD determines ST&E fish species are present.

Instructions for Populating the Water Availability Summary Table using data from OWRD's WAB (Section 5)

- Open OWRD's Water Availability Reporting System.
- Search for the water availability basin of interest. Select 50% exceedance. The 50% exceedance stream flow is the stream flow that occurs at least half of the time.
- The water availability analysis will display a nested list of watersheds that contain the POD. Select the highest nesting order WAB that contains the POD.
- Download to an Excel spreadsheet. Percent of flow is calculated using this equation:

$$\text{Percent of Flow} = \frac{\text{Consumptive Use}}{\text{Natural Stream Flow}} * 100$$

You may choose to add the proposed rate (or storage amount) to the consumptive use.

Instructions for Water Availability Analysis

To complete Section 6, review and consider the cumulative impact of consumptive withdrawals using the [OWRD WAB](#). All water withdrawals and the following factors should be considered when conducting a water availability analysis.

- **Instream Flow:** Consider the percent of natural flow removed from the stream in each month (see right-most column in Water Availability and Cumulative Impacts Summary Table). Based on best professional judgment, evaluate if the cumulative withdrawal is likely to cause impairment to aquatic life or water quality. Water quality standards are established to protect aquatic life. In scientific literature, researchers have identified ecological harm occurring when flows are reduced by **>6-35% of daily flow**¹. Consider the seasonality of any listings and season of withdrawal to determine impact for each month of the year.
- **Antidegradation:** Rule 340-041-0004 applies: withdrawals cannot cumulatively increase a waterbody's temperature by more than 0.5 degrees Fahrenheit or cause a 0.1 mg/l decrease in dissolved oxygen from the upstream end of a stream reach to the downstream end of the reach so long as it has no adverse effects on threatened and endangered species. See OAR [340-041-0004\(3\)-\(5\)](#) for a description in rule of activities that do not result in lowering of water quality.
- **Flow modification:** Consider if cumulative withdrawals are contributing to flow modification and a likely limiting factor in the waterbody at certain times of the year. Temperature and dissolved oxygen are flow-related parameters. When streamflow is reduced, assimilative capacity is reduced. As a waterbody heats up, dissolved oxygen concentrations decline. Reduced stream flows (including groundwater inputs to streamflow), exacerbate temperature and/or dissolved oxygen impairments.
- **Temperature:** Increases in temperature or a reduction in dissolved oxygen adversely impacts ST&E fish. Fish require different temperature and concentrations of dissolved oxygen based on species and life history stage. Oregon's temperature and dissolved oxygen limits are based on the most sensitive species and the life history stage of those species at the location and season of concern. Additional heat or reduction in dissolved oxygen concentrations will further impact these species habitat. Reduced flows can also increase the concentrations of phosphorous, bacteria, pesticides and metals.

Instructions for Calculating "Limit Diversion" Rate

This condition is selected to limit withdrawals once the cumulative withdrawals in the watershed have exceeded the protective threshold of 20 percent and/or the ISWR is not fully protective of aquatic life. A different value can be selected, but the reviewer should state why a particular percent was selected.

"Natural stream flow" is obtained from OWRD's Water Availability Reporting System. The condition is applied on a monthly timeframe based on OWRD's data.

"Natural stream flow" – (percent of flow * "natural stream flow") = Expected Stream Flow

The applicant would have to stop using when instream flows drop below the Expected Stream Flow.


Example:

Natural stream flow for a particular month = 1200 CFS

1200 CFS – (.2 * 1200 CFS) = 960 CFS

¹ Richter BD, Davis MM, Apse C, Konrad C. 2011. *Short Communication, A Presumptive Standard For Environmental Flow Protection*. River Research and Applications. Published online in Wiley Online Library (wileyonlinelibrary.com), DOI: 10.1002/rra.1551

DEQ Water Right Review Flow Chart

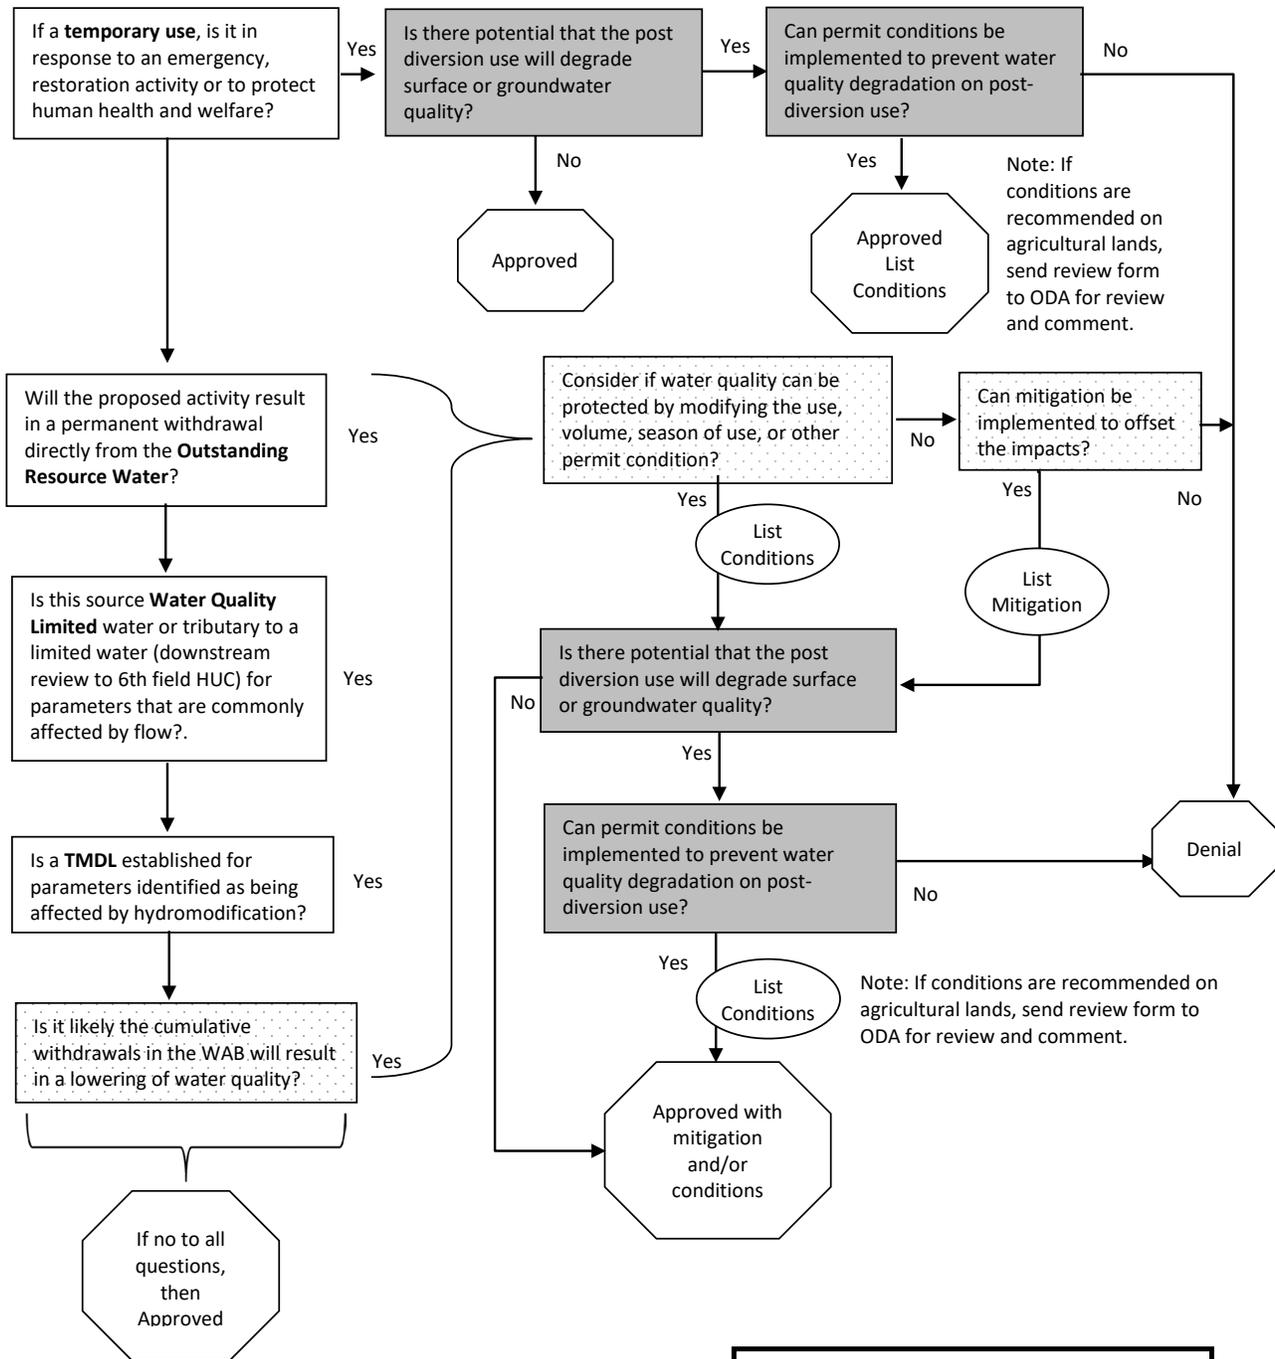

Each yes will need to be explained by how the use does not comply with existing state and federal water quality standards and how the use may affect sensitive, threatened or endangered fish species habitat.

Note: Review based on DEQ's anti-degradation rule (340-041-0004).

	Best Professional Judgment and Data
	Data
	Best Professional Judgment